

LT4363-1/LT4363-2
 12V Systems
 ISO-7637-2 Surge Stopper

DESCRIPTION

Demonstration circuit 2062A showcases the LT[®]4363 surge stopper in a 12V, 3A ISO-7637-2 application. Inputs of up to 50VDC and load dumps of up to 100V are limited to 25V at the output. The MOSFET is protected against output overloads by current limiting. Sustained overvoltage or overcurrent conditions cause the LT4363 to turn off after a timer delay. The LT4363-1 (DC2062A-A) latches off and is reset by pulling $\overline{\text{SHDN}}$ low for at least 100 μ s. The LT4363-2 (DC2062A-B) automatically retries after a cool down delay; retry is inhibited if OV is higher than 1.275V.

Danger! High voltage testing should be performed by qualified personnel only. As a safety precaution at least two people should be present during high voltage testing.

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

Board Layout

DC2062A is designed to withstand load dump. This high voltage is stood off by RUV4, ROV4, R7, RLED2, Q1, Q4. Maximum input voltage is limited by Q1's 100V BV_{DSS} rating. The permissible time at 100V is limited by MOSFET safe operating area (SOA) and R7, which dissipates slightly less than 1.2W and is capable of doing so for at least 500ms.

The minimum spacing is limited by 1206 pad spacing where the gap between solder pads is 2mm, or just under 80mils. Thus, the spacing between the input plane and all other board traces is maintained at a minimum of 2mm. As a point of reference, a 2mm needle gap in air breaks down well above 1kV.

Design files for this circuit board are available at <http://www.linear.com/demo>

PERFORMANCE SUMMARY

Specifications are at $T_A = 25^\circ\text{C}$

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input supply	Operating	5	12	23.5	V
	DC Survival	50			V
	500ms Transient	100			V
Reverse Input Protection	DC Survival	-30			V
	1ms Transient	-150			V
Output Regulation Voltage		23.5	25	25.4	V
Undervoltage Threshold		4	4.2	4.4	V
Retry Inhibit Threshold		18.2	19.1	20	V
Current Limit		3	3.8	4.6	A

QUICK START PROCEDURE

ISO-7637-2 Compliance

The DC2062A is fully compatible with electrical transients in a 12V ISO-7637-2 system. Compliance testing was performed by a third party company called TUV. Tests were performed at level 4, which is the most extreme condition an ISO-7637-2 system can face. The compliance report can be found on the sidebar of the LT4363 product landing page.

A summary of the report is shown in Table 1.

Load Dump Ride Through

The DC2062A showcases the ability of the LT4363 to ride through and suppress a 100V load dump pulse. While the DC2062A can ride through load dump events, several points should be kept in mind. First, the dissipation of several components rises to significant levels during a load dump event. Since this event lasts for approximately 500ms, these components are dissipating power for an appreciable amount of time. RUV4 dissipates 200mW, ROV4 dissipates 60mW, D1 dissipates 3.2W and R7 dissipates nearly 1.2W. These components are dissipating power for the duration of the 100V pulse and have been rated appropriately.

Another consideration is MOSFET SOA. Q1 dissipates an average of 80W throughout the time it is regulating a load dump pulse. While many modern MOSFETs have advertised power ratings much higher than 80W, these ratings are not indicative of performance in surge stopper applications for the following reasons:

1) The power ratings only apply for operation in triode and when the DUT is mounted on an infinite heat sink. 2) The power capability of a MOSFET reduces significantly when it is operated in saturation with a high V_{DS} across it.

MOSFET manufacturers provide an SOA graph which depicts the voltage and current conditions under which a MOSFET can be expected to operate safely. When selecting MOSFETs for a surge stopper application this graph must always be consulted carefully due to the fact that the points on the graph were tested under the previously discussed conditions.

Reverse Input Protection

The DC2062A features reverse protection circuitry that protects downstream components from reverse transients of up to $-150V$. This number is limited by the BV_{DSS} of Q2. The reverse protection circuitry also protects against reverse DC voltage of up to $-30V$.

DC2062A-A and DC2062A-B Options

The DC2062A-A is fitted with the LT4363-1 which latches off after a timer delay in the presence of overvoltage or overcurrent conditions. Once latched off the LT4363-1 may be restarted by pulsing the SHDN pin low for at least 100 μ s, or by briefly cycling power.

The DC2062A-B is fitted with the LT4363-2 which automatically retries after a cool-down cycle. Retry is inhibited by the OV pin, if the input is greater than 20V. Cool down time is typically 22.8 seconds.

Table 1. TUV ISO-7637 Report Summary

TEST PULSE	LEVEL IV REQUIREMENTS	LEVEL PASSED	# OF PULSES/DURATION	CLASSIFICATION OF FUNCTIONAL STATUS			
				NO DEVIATION	DEVIATION WITHIN SPECIFICATION	DOES NOT COMPLY	NOT PERFORMED
1	-100V	-100V	5000 Pulses	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class A	<input type="checkbox"/>	<input type="checkbox"/>
2a	+50V	+50V	5000 Pulses	<input checked="" type="checkbox"/> Class A	<input type="checkbox"/> Class A	<input type="checkbox"/>	<input type="checkbox"/>
2b	+10V	+10V	10 Pulses	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class A	<input type="checkbox"/>	<input type="checkbox"/>
3a	-150V	-150V	1 Hour	<input checked="" type="checkbox"/> Class A	<input type="checkbox"/> Class A	<input type="checkbox"/>	<input type="checkbox"/>
3b	+100V	+100V	1 Hour	<input checked="" type="checkbox"/> Class A	<input type="checkbox"/> Class A	<input type="checkbox"/>	<input type="checkbox"/>
4	-7V	-7V	3 Pulse	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class A	<input type="checkbox"/>	<input type="checkbox"/>
5	+87V	+89V	3 Pulse	<input checked="" type="checkbox"/> Class A	<input type="checkbox"/> Class A	<input type="checkbox"/>	<input type="checkbox"/>

QUICK START PROCEDURE

Operation

The shutdown pin, $\overline{\text{SHDN}}$, is floating so that when power is applied to the input, the LT4363 automatically turns on. The LT4363 protects the load from destruction by regulating the output voltage to a safe level during intervals of input overvoltage. DC2062A is designed to regulate the output at 25V. If the input voltage is less than 25V, power passes through directly to the output. The output is sensed by the R1/R2 divider and the FB pin. The GATE pin controls Q1 to regulate the output voltage in the event the input rises above 25V.

Overcurrent is sensed by RSNS and the SNS and OUT pins of the LT4363. If the load current reaches 50mV/13m Ω , the GATE pin will control Q1 to regulate the output current at 3.8A.

In both overcurrent and overvoltage conditions, current is sourced by the TMR pin into the timer capacitor, CTMR. It charges and upon reaching 1.375V, causes the LT4363 to turn off the MOSFET. As previously mentioned the LT4363-1 version latches off, while the LT4363-2 version automatically tries to restart the load after a 22.8 second cool-down interval.

The timer interval before the MOSFET turns off is variable, depending on the type and severity of the fault, and ranges from 135ms to 640ms. The cool-down time is 22.8s. For the LT4363-2 version, automatic retry is inhibited by the OV pin if the input remains higher than 20V, as set by the ROV4-ROV6 divider. For the LT4363-1 version, the OV pin becomes a ground pin (GND, Pin 7) and it is shorted to ground by a 0 Ω jumper at ROV6. The LT4363-1 version simply latches off in response to a fault. Restart by pulling $\overline{\text{SHDN}}$ low for at least 100 μ s, or by briefly disconnecting the input supply.

The combined tolerances of the LT4363 and external resistive dividers are approximately 4% for output voltage regulation (FB pin), 5% for undervoltage (UV pin) and retry inhibit threshold (OV pin), and 21% for current limit.

A performance summary is shown in a table on the schematic diagram and is silk-screened on the front of the demo board for easy reference.

Test Points

A summary of the test points and their related LT4363 pin is shown in Table 2.

Table 2.

Test Point	LT4363 Pin
INPUT	(Board Input)
DRAIN	(Junction of Drains of Q1 & Q2)
GATE	GATE
SNS	SNS
OUT	OUT
GND	GND
DGATE	(Q2 Gate)
V _{CC}	V _{CC}

Small Turrets

No connection to any of the small turrets is necessary to make the board operate—the LT4363 defaults to the ON state. If the $\overline{\text{SHDN}}$ turret is left open, the board will turn on when power is applied. Short this turret to ground to turn off the LT4363.

$\overline{\text{FLT}}$ and ENOUT are open-collector outputs. If used, pull up to the output or an output-derived external logic supply. There are no pull-ups included on DC2062A. $\overline{\text{FLT}}$ and ENOUT have 100V ratings and can sink 100 μ A to less than 800mV. TMR is brought out to a turret for the purpose of monitoring the waveform there. It may also be used to connect external timer capacitors.

Quick Start

Connect a 12V supply to INPUT, and connect a load to OUTPUT as shown in Figure 1. The circuit will turn on automatically when power is applied, and green LED1 will show that the output is up. LED3 indicates that input power is present. If the input voltage is increased above 25V, the output will shut off and LED1 will extinguish. The output will remain off until the input is brought below 20V. Similarly, if the input voltage is decreased to less than 4V the output will shut off and LED1 will extinguish. It will restart when the input rises above 5V.

QUICK START PROCEDURE

To test ISO-7637-2 compliance, apply a transient to the input as shown in Figure 2. Use a storage oscilloscope to monitor both the input and the output, and use the

NSG5500 trigger output to trigger the oscilloscope sweep. The expected output to ISO7637-2 load dump pulse 5 is shown in Figure 3.

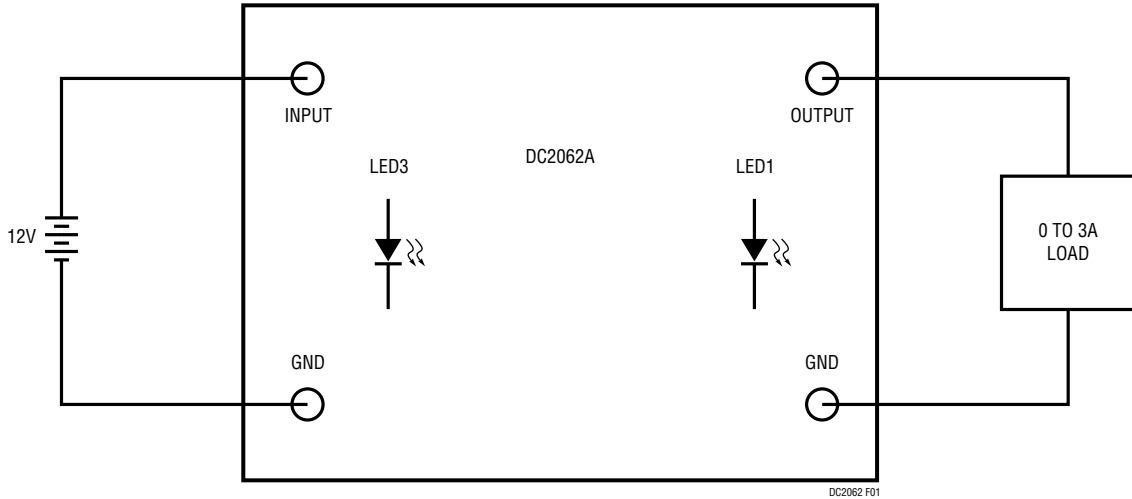


Figure 1: Basic Test Setup

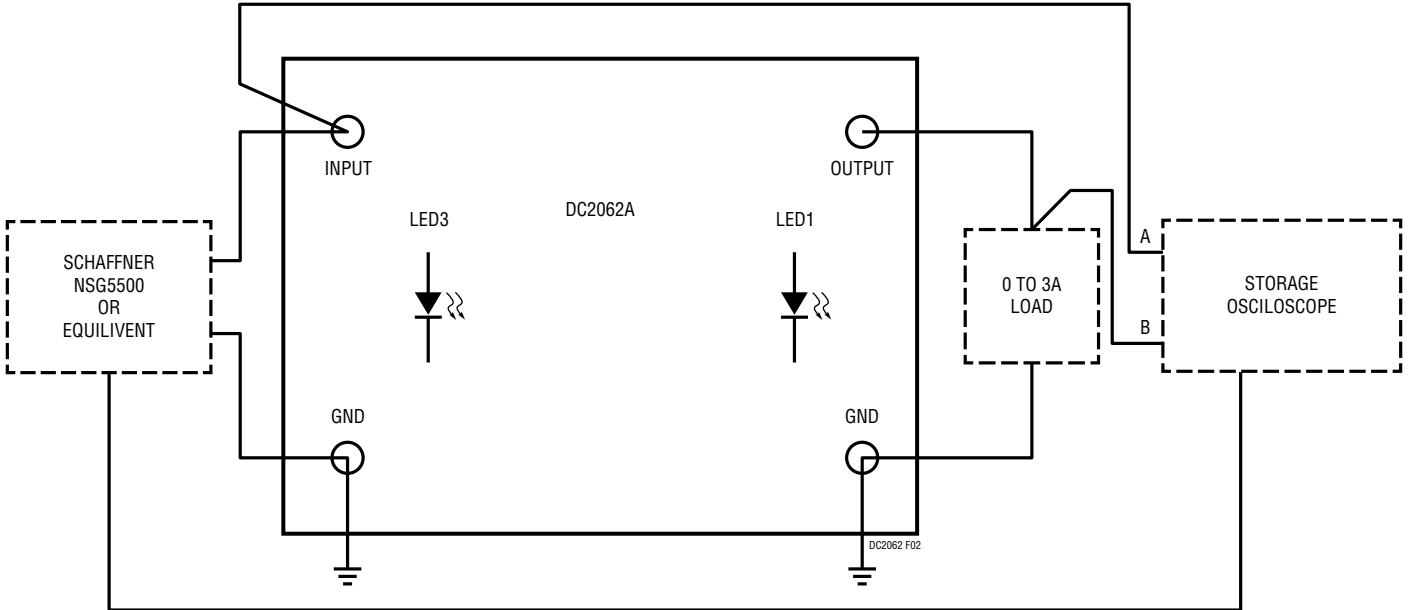


Figure 2: Testing ISO-7637-2 Transients.

QUICK START PROCEDURE

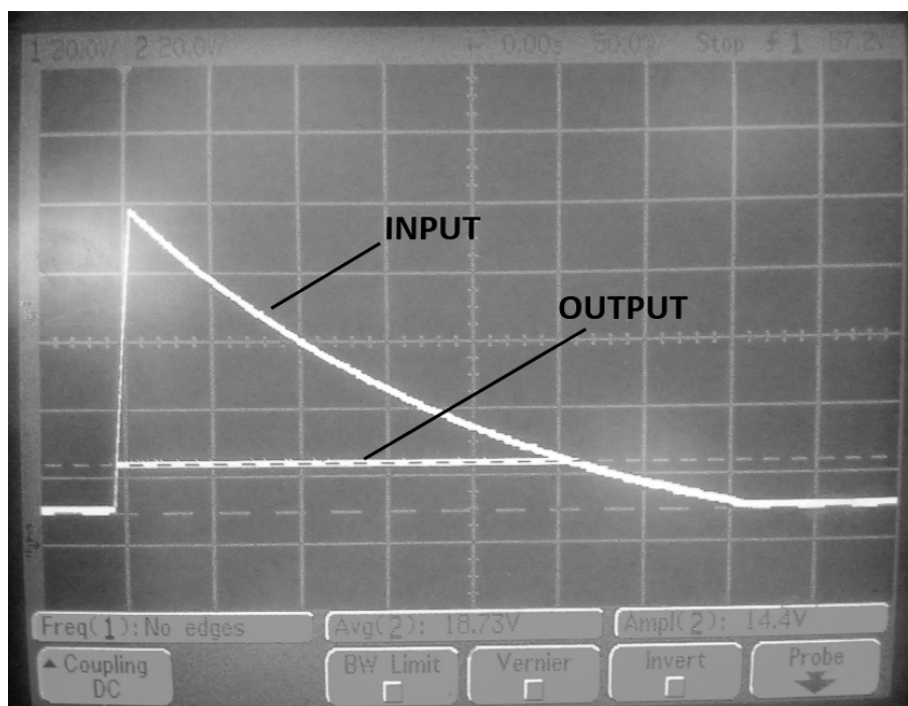


Figure 3: ISO-7637-2 Load Dump Event

PARTS LIST


ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	CG	CAP., X7R, 47nF, 100V, 20%, 0805	AVX, 08051C473MAT2A
2	1	CL	CAP., ALUM., 33 μ F, 50V, 20%, SMT	SUN ELECT., 50CE33LX
3	1	CSNUB	CAP., X5R, 10nF, 500V, 20%, 1812	AVX, 18127C103MAT2A
4	1	CTMR1	CAP., X5R, 6.8 μ F, 6.3V, 20%, 0805	TDK C2012X5R0J685M
5	0	CTMR2	CAP., X7R, 4.7 μ F, 100V, 20%, 0805	OPT
6	1	C2	CAP., X7R, 100nF, 100V, 20%, 0805	AVX, 08051C104MAT2A
7	2	C4,CUV	CAP., X7R, 10nF, 200V, 20%, 0805	AVX, 08052C103MAT2A
8	5	D2, D3, D4, D5, DLED	DIODE, CURRENT LIMITING, SOD123	DIODES INC, BAV3004W
9	1	D1	DIODE, TVS, 60V, SMA-DIODE	DIODES INC, SMAJ60A-13-F
10	2	D6, D7	DIODE, ZENER 15V, SOD323	DIODES INC, DDZ9702S
11	4	E2, E3, E5, E8	TP, TURRET, .094"	MILL-MAX, 2501-2-00-80-00-00-07-0
12	6	E9, E10, E11, E12, E13, E14	TP, TURRET, .064"	MILL-MAX, 2308-2-00-80-00-00-07-0
13	4	J1, J2, J3, J4	BANANA JACK, NON-INSULATED	KEYSTONE, 575-4
14	2	LED1, LED2	LED, SMT GREEN, LED-ROHM-SML-010	ROHM, SML-010FT

DEMO MANUAL DC2062A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
15	1	LED3	LED, SMT RED, LED-ROHM-SML-010	ROHM, SML-010VT
16	1	Q1	MOSFET, N-CH,100V, TO-3PN	FAIRCHILD, FQA140N10
17	1	Q2	MOSFET, N-CH,150V, S08	FAIRCHILD, FDS86240
18	2	Q3, Q5	XTOR, NPN, 40V, SOT23	DIODES INC., MMBT3904-7-F
19	1	Q4	XTOR, NPN, 300V, SOT223	FAIRCHILD, PZTA42
20	1	RG	RES., CHIP, 33 Ω , 1/8W, 5% 0805	NIC, NRC10J330TRF
21	1	RLED1	RES., CHIP, 3k Ω 1/4W, 5% 1206	NIC, NRC12J302TR10F
22	1	RLED2	RES., CHIP, 249k, 1/4W, 1%, 1206	NIC, NRC12F2493TRF
23	1	RLED3	RES., CHIP, 200, 1/8W, 5%, 0805	NIC, NRC10J201TRF
24	1	RLED4	RES., CHIP, 3.3k, 1/4W, 5%, 1206	NIC, NRC12J332TRF
25	2	R2, RUV6	RES., CHIP, 10k, 1/4W, 1%, 0805	NIC, NRC10F1002TRF
26	1	RSNS	RES., CHIP, SENSE, 0.013 Ω , 1/4W, 5%, 1206	NIC, NCST12JR013JTRF
27	1	RSNUB	RES., CHIP, 100 Ω , 1/2W, 5%, 1210, PULSE PROOF	NIC, NRCP25J101TRF
			ALTERNATE PART NUMBER FOR RSNUB (3/4W PART)	VISHAY, CRCW1210100RJNEAHP
28	1	RUV4	RES., CHIP, 23.2k Ω , 1/4W, 1%, 1206	NIC, NRC12F2322TRF
29	1	R1	RES., CHIP, 182k, 1/8W, 1%, 0805	NIC, NRC10F1823TRF
30	1	R3	RES., CHIP, 10 Ω , 1/8W, 5% 0805	NIC, NRC10J100TRF
31	1	R7	RES., CHIP, 620, 1/4W, 5%, 1206 PULSE PROOF (FOR PROD ASSY)	VISHAY, CRCW1206620RJNEAIF
32	0	R8	RES., CHIP, 240k, 1/8W, 5%, 0805	OPT
33	3	R9, R11, R12	RES., CHIP, 240k, 1/4W, 5%, 1206	NIC, NRC12J244TRF
34	1	R10	RES., CHIP, 10k Ω , 1/4W, 5%, 1206, PULSE PROOF	VISHAY, CRCW120610K0JNEAIF
35	4		STANDOFF, NYLON 0.5"	KEystone, 8833 (SNAP ON)
DC2062A-A				
1	0	COV	CAP., 0805	OPT
2	0	ROV4	RES., 1%, 1206	OPT
3	1	ROV6	RES., CHIP, 0 Ω , 0805	VISHAY, CRCW08050000Z0EA
4	1	U1	I.C., LT4363IDE-1, DFN12DE-4X3	LINEAR TECH., LT4363IDE-1
DC2062A-B				
1	1	COV	CAP., X7R, 10nF, 200V 20%, 0805	AVX, 08052C103MAT2A
2	1	ROV4	RES., CHIP, 140K, 1/4W, 1%, 1206	NIC, NRC12F1403TRF
3	1	ROV6	RES., CHIP, 10K, 1/4W, 1%, 0805	NIC, NRC10F1002TRF
4	1	U1	I.C., LT4363IDE-2, DFN12DE-4X3	LINEAR TECH., LT4363IDE-2

SCHEMATIC DIAGRAM

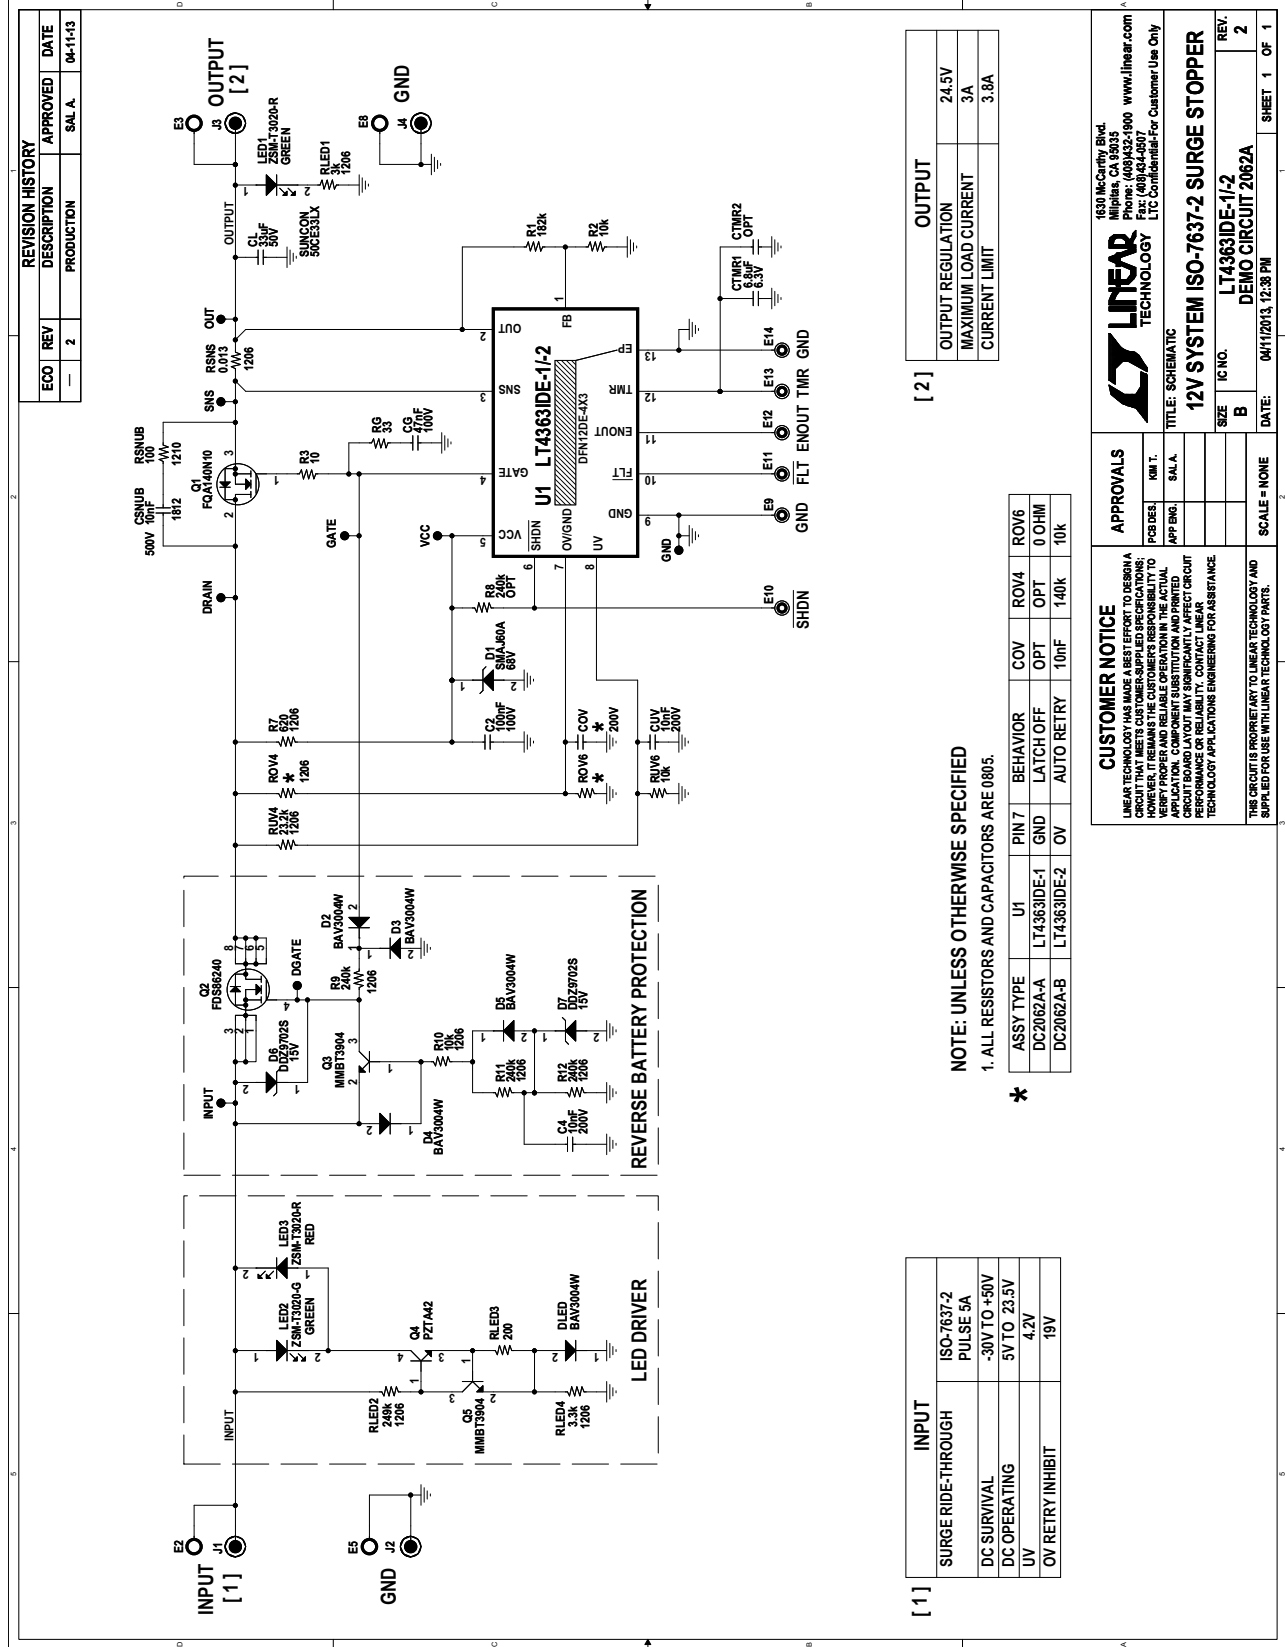

REVISION HISTORY				
ECO	REV	DESCRIPTION	APPROVED	DATE
	2	PRODUCTION	SAL A.	04-11-13

[2]	
OUTPUT REGULATION	24.5V
MAXIMUM LOAD CURRENT	3A
CURRENT LIMIT	3.8A

[2]

NOTE: UNLESS OTHERWISE SPECIFIED
1. ALL RESISTORS AND CAPACITORS ARE 0805.

[1]	
SURGE RIDE-THROUGH	ISO-7637-2 PULSE 5A
DC SURVIVAL	-30V TO +50V
DC OPERATING	5V TO 23.5V
UV	4.2V
OV RETRY INHIBIT	19V

ASSY TYPE	U1	PIN7 BEHAVIOR	COV	ROV6
DC2062A-A	LT4363IDE-1	LATCH OFF	OPT	0 OHM
DC2062A-B	LT4363IDE-2	OV	AUTO RETRY	10nF 140k 10k

1630 McCarty Blvd.
Milpitas, CA 95035-5090 www.linear.com
Tel: (415) 964-8000 Fax: (415) 964-4007
LTC Confidential-For Customer Use Only

LINEAR TECHNOLOGY

TITLE: SCHEMATIC

12V SYSTEM ISO-7637-2 SURGE STOPPER

REV. 2

IC NO. LT4363IDE-1/2

DEMO CIRCUIT 2062A

SIZE B

SCALE = NONE

DATE: 04/11/2013, 12:38 PM

SHEET 1 OF 1

APPROVALS

PCB DES.	KIM T.
APP ENG.	SAL A.

CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. A CHANGE IN ANY OF THE CUSTOMER-SUPPLIED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

DEMO MANUAL DC2062A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

dc2062af

8

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7417
(408) 432-1900 • FAX: (408) 434-0507 • www.linear.com

LT 1013 • PRINTED IN USA



© LINEAR TECHNOLOGY CORPORATION 2013

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru