

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- . -
(C) COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.		

LOC	DIST	REVISIONS					
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	ECR-07-013055	6-2007	MY	GB

PART NUMBER	REV	FIRST USED	TERMINATOR	FEED TYPE	DESCRIPTION
1426060-1	C	-	LEADMAKER	MECH POST FEED	CUTS CARRIER
1426060-2	C	-	BENCH	MECH PRE FEED	CUTS CARRIER
1426060-6	C	-	LEADMAKER	MECH POST FEED	CONTINUOUS CARRIER
7-1426060-1	C	-	LEADMAKER	MECH POST FEED	-1 AND SPARE PARTS
7-1426060-2	C	-	BENCH	MECH PRE FEED	-2 AND SPARE PARTS
7-1426060-6	C	-	LEADMAKER	MECH POST FEED	-6 AND SPARE PARTS
7-1426060-7	A	-	-	-	SPARE PARTS KIT

CRIMP DATA (AMP TERMINAL)

TERMINAL NAME: ASSY FOR CI II SOCKET WITH SPRING

CRIMP	SIZE	TYPE	RANGE
WIRE	2.79 [.110 IN]	F	1.50 - 2.50mm ²
INSUL	3.56 [.140 IN]	OV	2.10-3.10 [.083-.122 IN]
WIRE STRIP LENGTH			APPL INSTRUCTION 408-8322
3.50-4.10 [.138-.161 IN]			

TERMINAL	—	—		FEED
APPL SPEC	114-18056	—		12.70 [.500 IN]

TERMINALS APPLIED

[illegible]

WIRE SIZE mm ² AWG		CRIMP HEIGHT 	PIN PN & LENGTH [IN]
2.50mm ²		1.77 ±0.05 [.070 ±.002 IN]	8-354778-4 [.2915]
1.50mm ²		1.64 ±0.05 [.065 ±.002 IN]	9-354778-4 [.2965]
1.00mm ²		1.51 ±0.05 [.059 ±.002 IN]	354779-7 [.3025]

[illegible]


SET UP GAGE 458637-3	LAYOUT L1426060
-------------------------	--------------------

-   RECOMMENDED SPARE PARTS.

 2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
 3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

VIEW B ROTATED 180°

POST FEED 40 mm STROKE	POST FEED 30 mm STROKE	PRE FEED 30 mm STROKE	PRE FEED 40 mm STROKE
 Diagram showing the POST FEED 40 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (47) is shown with a stroke of 40 mm. The feed pin (49) is positioned at the end of the stroke.	 Diagram showing the POST FEED 30 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (47) is shown with a stroke of 30 mm. The feed pin (49) is positioned at the end of the stroke.	 Diagram showing the PRE FEED 30 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (48) is shown with a stroke of 30 mm. The feed pin (49) is positioned at the end of the stroke.	 Diagram showing the PRE FEED 40 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (48) is shown with a stroke of 40 mm. The feed pin (49) is positioned at the end of the stroke.

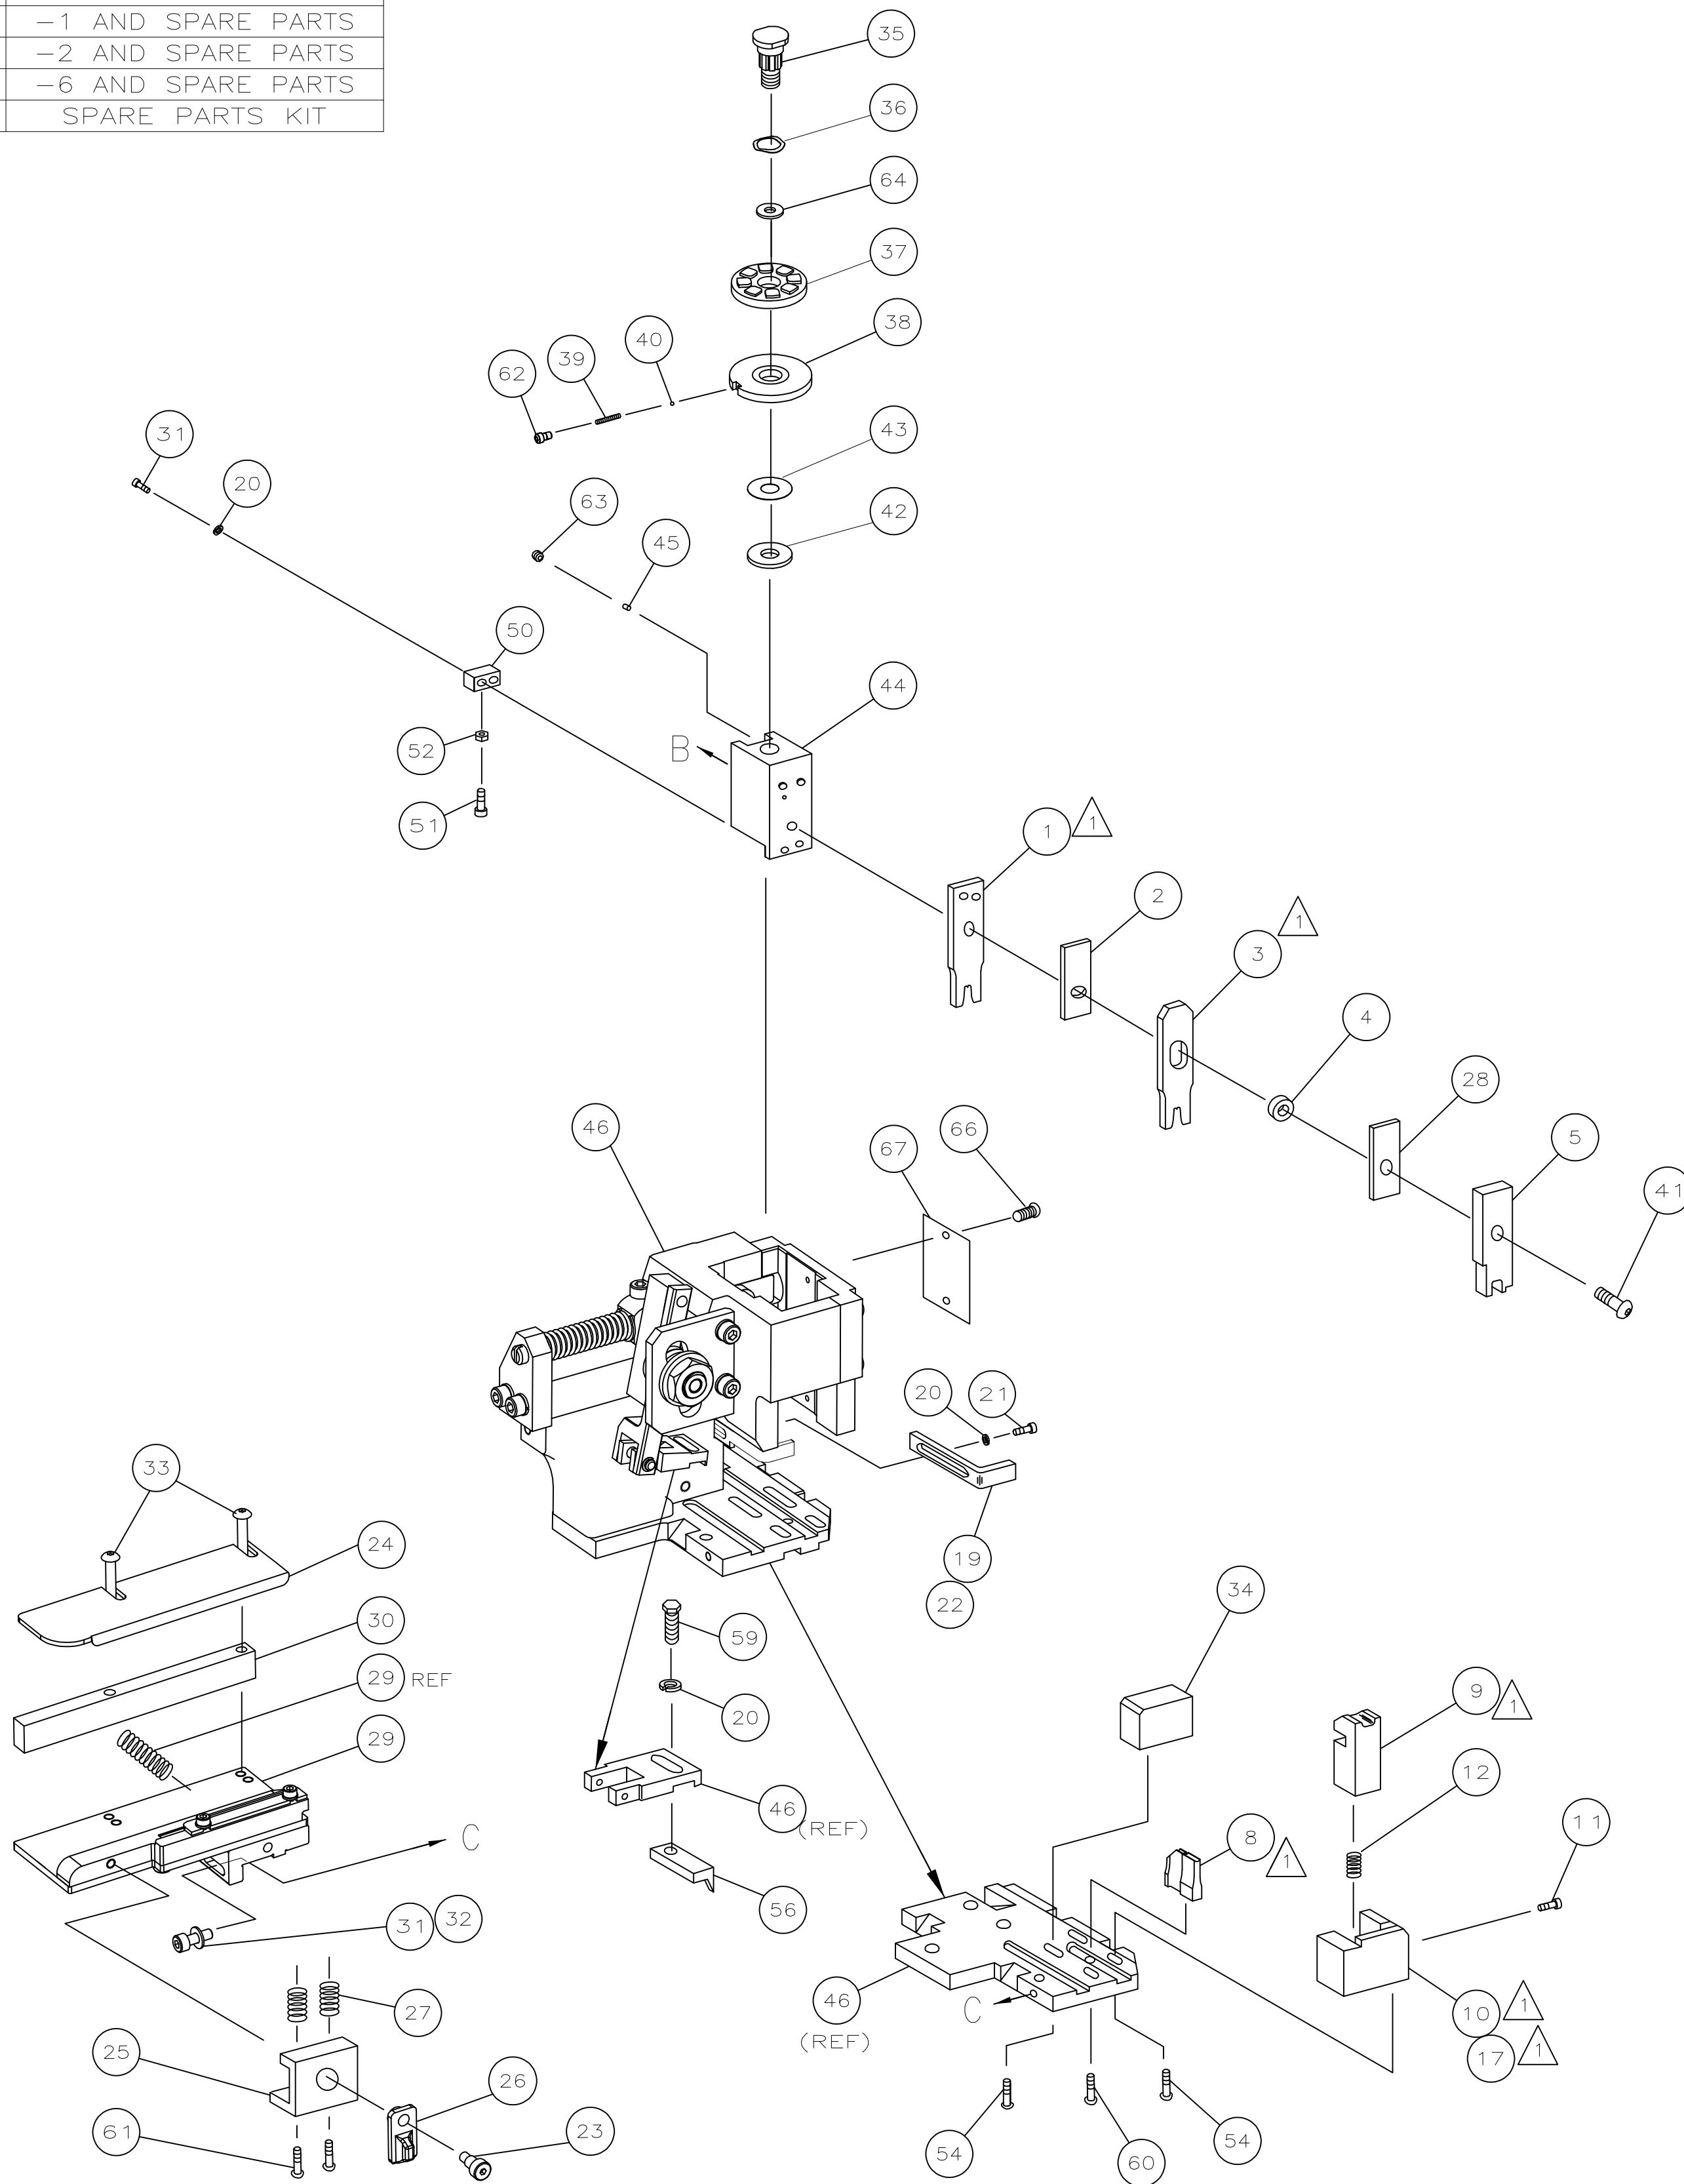

										73
-	1	1	1	1	1	1	1426060	PRINT, APPLICATOR LOG SHEET		72
-	1	1	1	1	1	1	1338705-1	DOCUMENTATION PACKAGE		71
										70
										69
										68
-	1	1	1	1	1	1	461264-1	PLATE, IDENTIFICATION		67
-	2	2	2	2	2	2	21017-2	SCR,DRIVE(#2x.19)ID PLATE		66
										65
-	1	1	1	1	1	1	986950-1	WASHER, FLAT PRECISION		64
-	1	1	1	1	1	1	3-18031-0	SCR,SKT SET(M6X6)RAM		63
-	1	1	1	1	1	1	18023-9	SCR,SHC(M4X6)INS DISC		62
-	2	2	2	2	2	2	2-18032-5	SCR,SET(M5X20)DRAG		61
-	1	1	1	1	1	1	18024-7	SCR,BHC(M4X10)ANVIL		60
-	1	1	1	1	1	1	5-18022-2	SCR,HEX(M4X8)FEED FINGER		59
										58
										57
-	1	1	1	1	1	1	1338685-1	PAWL, FEED		56
										55
-	4	4	4	4	4	4	18024-8	SCR,BHC(M4x12)SHEAR HOLDER		54
										53
-	1	1	1	1	1	1	18030-1	NUT,HEX(M3)HOLD DOWN		52
-	1	1	1	1	1	1	811242-5	BUMPER, HOLDDOWN		51
-	1	1	1	1	1	1	690753-2	SPACER, TONKER		50
-	1	1	1	1	1	1	18024-3	SCR,BHC(M3X10)CAM		49
-	-	1	-	-	1	-	1338675-1	CAM, PRE FEED 30 & 40 mm ST		48
-	1	-	1	1	-	1	1338676-1	CAM, POST FEED 30 & 40 mm ST		47
-	1	1	1	1	1	1	1320999-3	APPLICATOR BASIC SUBASSY		46
-	1	1	1	1	1	1	690191-1	PLUG, NYLON		45
-	1	1	1	1	1	1	1338660-1	RAM		44
-	1	1	1	1	1	1	690125-1	WASHER, LAMINATED		43
-	1	1	1	1	1	1	690124-1	WASHER, RAM		42
-	1	1	1	1	1	1	2-18024-6	SCR,BHC(M8X25)RAM		41
-	1	1	1	1	1	1	23241-1	BALL, STEEL		40
-	1	1	1	1	1	1	2-22278-7	SPRING, COMPRESSION		39
-	1	1	1	1	1	1	1320922-1	DISC, INSULATION		38
-	1	1	1	1	1	1	354777-1	WIRE DISC, PLASTIC		37
-	1	1	1	1	1	1	22480-5	WASHER, SPRING		36
-	1	1	1	1	1	1	690212-1	POST, RAM		35
-	1	1	1	1	1	1	1320934-1	SUPPORT, TERMINAL		34
-	2	2	2	2	2	2	1-18024-0	SCR,BHC(M4X20)STRIP GUIDE		33
-	1	1	1	1	1	1	18027-2	WASHER, FLAT(M4)		32
-	3	3	3	3	3	3	1-18023-2	SCR,SKT CAP(M4X12)MOUNT BLOCK		31
-	1	1	1	1	1	1	1320908-6	SPACER, STRIP GUIDE		30
-	1	1	1	1	1	1	1633073-1	STRIP GUIDE PLATE ASSY		29
-	1	1	1	1	1	1	1-455888-4	SPACER, FRONT SHEAR DEP		28
-	2	2	2	2	2	2	1-22284-0	SPRING, DRAG		27
-	1	1	1	1	1	1	356835-1	LEVER, DRAG RELEASE		26
-	1	1	1	1	1	1	240792-1	DRAG, TERMINAL		25
-	1	1	1	1	1	1	1320928-1	PLATE, STRIP GUIDE		24
-	1	1	1	1	1	1	980371-4	SCR,SHC SHLD		23
-	1	-	1	1	-	1	690472-2	STRIPPER		22
-	1	1	1	1	1	1	1-18023-1	SCR,SHC(M4X10)STRIPPER		21
-	4	4	4	4	4	4	18025-2	WASHER,LOCK(M4)STRIPPER		20
-	-	1	-	-	1	-	690472-1	STRIPPER		19
										18
-	1	-	-	1	-	-	1338684-1	HOLDER, SHEAR, FRONT (NO-CUT)		17
										16
										15
										14
										13
-	1	1	1	1	1	1	3-22280-3	SPRING, SHEAR		12
-	1	1	1	1	1	1	356885-4	STOP, SHEAR		11
-	-	1	1	-	1	1	1320921-1	HOLDER, SHEAR, FRONT (CUT)		10
-	1	1	1	1	1	1	454276-1	SHEAR, FLOAT (FRONT)		9
1	2	2	2	1	1	1	1333207-6	ANVIL		8
										7
										6
-	1	1	1	1	1	1	1-455889-4	DEPRESSOR, SHEAR (FRONT)		5
-	1	1	1	1	1	1	2-238011-2	SPACER, BLOCK CRIMPER		4
1	2	2	2	1	1	1	1-854830-0	CRIMPER, INSULATION		3
-	1	1	1	1	1	1	455888-4	SPACER, CRIMPER		2
1	2	2	2	1	1	1	4-456408-0	CRIMPER, WIRE		1

-77 -76 -72 -71 -6 -2 -1						PART NO				DESCRIPTION				ITEM NO	
QTY REQD PER ASSY						PARTS LIST									
THIS DRAWING IS A CONTROLLED DOCUMENT.						DWN M. CLIFFORD 24JUL00 CHK —		 Tyco Electronics Corporation Harrisburg, PA 17105-3608							
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:				APVD F. BACKHURST 24JUL00 PRODUCT SPEC — APPLICATION SPEC —		NAME		SIDE FEED HD-I APPLICATOR — —					
						SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
MATERIAL —		FINISH —				WEIGHT —		A1		00779		©=1426060		—	
CUSTOMER DRAWING						SCALE		—		SHEET		1 OF 1		REV C	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru