

## COMBICON Plugs and Headers as a „high current“ (HC) Version for Currents up to 16 A, 5.0 or 5.08 mm Pitch


---

### Tuning for the MSTB classic

The proven COMBICON MSTB plug connector is now available as a "high current" (HC) version for currents up to 16 A. On top of the familiar MSTB features, a double steel spring guarantees extra safety for higher power transmission.

The HC family is available with 2 to 12 positions and in pitches of 5.0 and 5.08 mm.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.

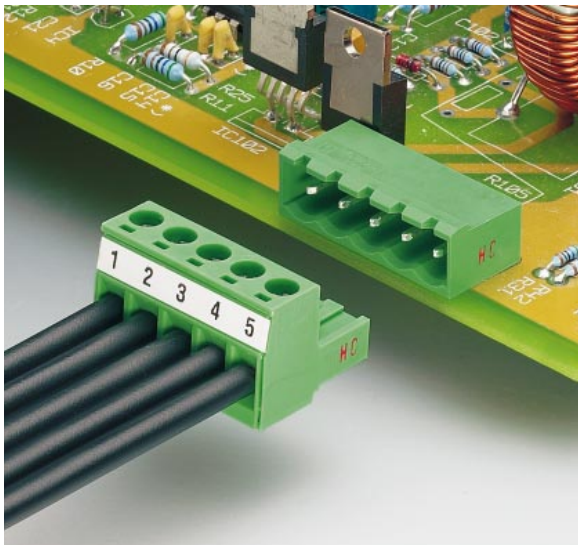

# MSTB 2,5 HC/...-ST(-5,08) 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.



### Note:

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC plugs, 5.0 mm pitch</b>					
color: green	2	5	MSTB 2,5 HC/2-ST	19 11 85 5	50
	3	10	MSTB 2,5 HC/3-ST	19 11 86 8	
	4	15	MSTB 2,5 HC/4-ST	19 11 87 1	
	5	20	MSTB 2,5 HC/5-ST	19 11 88 4	
	6	25	MSTB 2,5 HC/6-ST	19 11 89 7	
	7	30	MSTB 2,5 HC/7-ST	19 11 90 7	
	8	35	MSTB 2,5 HC/8-ST	19 11 91 0	
	9	40	MSTB 2,5 HC/9-ST	19 11 92 3	
	10	45	MSTB 2,5 HC/10-ST	19 11 93 6	
	11	50	MSTB 2,5 HC/11-ST	19 11 94 9	
	12	55	MSTB 2,5 HC/12-ST	19 11 95 2	
<b>COMBICON HC plugs, 5.08 mm pitch</b>					
color: green	2	5.08	MSTB 2,5 HC/2-ST-5,08	19 11 96 5	50
	3	10.16	MSTB 2,5 HC/3-ST-5,08	19 11 97 8	
	4	15.24	MSTB 2,5 HC/4-ST-5,08	19 11 98 1	
	5	20.32	MSTB 2,5 HC/5-ST-5,08	19 11 99 4	
	6	25.40	MSTB 2,5 HC/6-ST-5,08	19 12 00 3	
	7	30.48	MSTB 2,5 HC/7-ST-5,08	19 12 01 6	
	8	35.56	MSTB 2,5 HC/8-ST-5,08	19 12 02 9	
	9	40.64	MSTB 2,5 HC/9-ST-5,08	19 12 03 2	
	10	45.72	MSTB 2,5 HC/10-ST-5,08	19 12 04 5	
	11	50.80	MSTB 2,5 HC/11-ST-5,08	19 12 05 8	
	12	55.88	MSTB 2,5 HC/12-ST-5,08	19 12 06 1	
(1) Coding profile, is inserted into the groove on the plug, red insulating material			CP-MSTB	17 34 63 4	
(2) Marker card, with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5/3,8 or SK 5,08/3,8 (see COMBICON catalog)		


### Technical data

Dimensions	see description on page 13		
Pitch	[mm]	5 / 5.08	
Hole diameter	[mm]	-	
Pin dimensions	[mm]x[mm]	-	
<b>Technical data in accordance with IEC/ DIN VDE</b>			
Insulating material group	-	I	
Surge voltage category / contamination class	-/-	III / 3	III / 2 II / 2
Rated voltage	[V]	250	320 630
Rated surge voltage	[kV]	4	4 4
Nominal current / cross section	[A]/[mm <sup>2</sup> ]	16 / 2.5	
Maximum load current / cross section	[A]/[mm <sup>2</sup> ]	16 / 2.5	
<b>Capacity connection</b>			
Solid / stranded / conductor sizes	[mm <sup>2</sup> ]/[mm <sup>2</sup> ]/AWG	0.2 - 2.5 / 0.2 - 2.5 / 24 - 12	
Stranded with ferrule without / with plastic sleeve	[mm <sup>2</sup> ]	0.25 - 2.5 / 0.25 - 2.5	
<b>Multiple connection (2 conductors with same cross section)</b>			
Solid / stranded	[mm <sup>2</sup> ]	0.2 - 1 / 0.2 - 1.5	
Stranded with ferrule with plastic sleeve	[mm <sup>2</sup> ]	0.25 - 1	
Stranded with TWIN ferrule with plastic sleeve	[mm <sup>2</sup> ]	0.5 - 1.5	
<b>Stripping length</b>	[mm]	7	
<b>Internal cylindrical gauge (IEC 60 947-1)</b>		A 3	
<b>Thread</b>		M 3	
<b>Torque</b>	[Nm]	0.5 - 0.6	
<b>Insulating material</b>		PA	
<b>Inflammability class in acc. with UL 94</b>		V0	

# MSTB 2,5 HC/...-STF(-5,08) with Srew Flange 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.

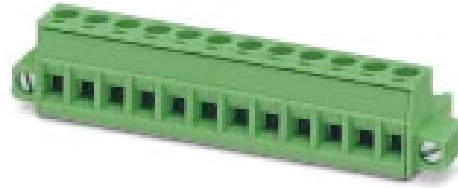

**Note:**

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC plugs, 5.0 mm pitch, with screw flange, color: green</b>	2	5	<b>MSTB 2,5 HC/2-STF</b>	<b>19 12 07 4</b>	50
	3	10	<b>MSTB 2,5 HC/3-STF</b>	<b>19 12 08 7</b>	
	4	15	<b>MSTB 2,5 HC/4-STF</b>	<b>19 12 09 0</b>	
	5	20	<b>MSTB 2,5 HC/5-STF</b>	<b>19 12 10 0</b>	
	6	25	<b>MSTB 2,5 HC/6-STF</b>	<b>19 12 11 3</b>	
	7	30	<b>MSTB 2,5 HC/7-STF</b>	<b>19 12 12 6</b>	
	8	35	<b>MSTB 2,5 HC/8-STF</b>	<b>19 12 13 9</b>	
	9	40	<b>MSTB 2,5 HC/9-STF</b>	<b>19 12 14 2</b>	
	10	45	<b>MSTB 2,5 HC/10-STF</b>	<b>19 12 15 5</b>	
	11	50	<b>MSTB 2,5 HC/11-STF</b>	<b>19 12 16 8</b>	
	12	55	<b>MSTB 2,5 HC/12-STF</b>	<b>19 12 17 1</b>	
	<b>COMBICON HC plugs, 5.08 mm pitch, with screw flange, color: green</b>	2	5.08	<b>MSTB 2,5 HC/2-STF-5,08</b>	
3		10.16	<b>MSTB 2,5 HC/3-STF-5,08</b>	<b>19 12 19 7</b>	
4		15.24	<b>MSTB 2,5 HC/4-STF-5,08</b>	<b>19 12 20 7</b>	
5		20.32	<b>MSTB 2,5 HC/5-STF-5,08</b>	<b>19 12 21 0</b>	
6		25.40	<b>MSTB 2,5 HC/6-STF-5,08</b>	<b>19 12 22 3</b>	
7		30.48	<b>MSTB 2,5 HC/7-STF-5,08</b>	<b>19 12 23 6</b>	
8		35.56	<b>MSTB 2,5 HC/8-STF-5,08</b>	<b>19 12 24 9</b>	
9		40.64	<b>MSTB 2,5 HC/9-STF-5,08</b>	<b>19 12 25 2</b>	
10		45.72	<b>MSTB 2,5 HC/10-STF-5,08</b>	<b>19 12 26 5</b>	
11		50.80	<b>MSTB 2,5 HC/11-STF-5,08</b>	<b>19 12 27 8</b>	
12		55.88	<b>MSTB 2,5 HC/12-STF-5,08</b>	<b>19 12 28 1</b>	
(1) <b>Coding profile</b> , is inserted into the groove on the plug, red insulating material				<b>CP-MSTB</b>	<b>17 34 63 4</b>
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8 or SK 5,08/3,8</b> (see COMBICON catalog)		

**Technical data**

Dimensions	see description on page 13		
Pitch	[mm]	5 / 5.08	
Hole diameter	[mm]	-	
Pin dimensions	[mm]x[mm]	-	
<b>Technical data in accordance with IEC/ DIN VDE</b>			
Insulating material group	-	I	
Surge voltage category / contamination class	-/-	III / 3	III / 2 II / 2
Rated voltage	[V]	250	320 630
Rated surge voltage	[kV]	4	4 4
Nominal current / cross section	[A]/[mm²]		16 / 2.5
Maximum load current / cross section	[A]/[mm²]		16 / 2.5
<b>Capacity connection</b>			
Solid / stranded / conductor sizes	[mm²]/[mm²]/AWG	0.2 - 2.5 / 0.2 - 2.5 / 24 - 12	
Stranded with ferrule without / with plastic sleeve	[mm²]	0.25 - 2.5 / 0.25 - 2.5	
<b>Multiple connection (2 conductors with same cross section)</b>			
Solid / stranded	[mm²]	0.2 - 1 / 0.2 - 1.5	
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 1	
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5 - 1.5	
<b>Stripping length</b>	[mm]	7	
<b>Internal cylindrical gauge (IEC 60 947-1)</b>		A 3	
<b>Thread</b>		M 3	
<b>Torque</b>	[Nm]	0.5 - 0.6	
<b>Insulating material</b>		PA	
Inflammability class in acc. with UL 94		V0	

# MSTBT 2,5 HC/...-ST

## 5.0 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.




### Note:

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC plugs, 5.0 mm pitch, color: green</b>	2	5	<b>MSTBT 2,5 HC/2-ST</b>	<b>19 26 35 8</b>	50
	3	10	<b>MSTBT 2,5 HC/3-ST</b>	<b>19 26 24 8</b>	
	4	15	<b>MSTBT 2,5 HC/4-ST</b>	<b>19 26 25 1</b>	
	5	20	<b>MSTBT 2,5 HC/5-ST</b>	<b>19 26 26 4</b>	
	6	25	<b>MSTBT 2,5 HC/6-ST</b>	<b>19 26 27 7</b>	
	7	30	<b>MSTBT 2,5 HC/7-ST</b>	<b>19 26 28 0</b>	
	8	35	<b>MSTBT 2,5 HC/8-ST</b>	<b>19 26 29 3</b>	
	9	40	<b>MSTBT 2,5 HC/9-ST</b>	<b>19 26 30 3</b>	
	10	45	<b>MSTBT 2,5 HC/10-ST</b>	<b>19 26 31 6</b>	
	11	50	<b>MSTBT 2,5 HC/11-ST</b>	<b>19 26 32 9</b>	
	12	55	<b>MSTBT 2,5 HC/12-ST</b>	<b>19 26 33 2</b>	
(1) <b>Coding profile</b> , is inserted into the groove on the plug, red insulating material			<b>CP-MSTB</b>	<b>17 34 63 4</b>	
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8</b> (see COMBICON catalog)		

### Technical data

Dimensions		see description on page 13		
Pitch	[mm]	5		
Hole diameter	[mm]	-		
Pin dimensions	[mm]x[mm]	-		
<b>Technical data in accordance with IEC/ DIN VDE</b>				
Insulating material group	-	I		
Surge voltage category / contamination class	-/-	III / 3	III / 2	II / 2
Rated voltage	[V]	250	320	630
Rated surge voltage	[kV]	4	4	4
Nominal current / cross section	[A]/[mm <sup>2</sup> ]	16 / 2.5		
Maximum load current / cross section	[A]/[mm <sup>2</sup> ]	16 / 2.5		
<b>Capacity connection</b>				
Solid / stranded / conductor sizes	[mm <sup>2</sup> ]/[mm <sup>2</sup> ]/AWG	0.2 - 2.5 / 0.2 - 2.5 / 24 - 12		
Stranded with ferrule without / with plastic sleeve	[mm <sup>2</sup> ]	0.25 - 2.5 / 0.25 - 2.5		
<b>Multiple connection (2 conductors with same cross section)</b>				
Solid / stranded	[mm <sup>2</sup> ]	0.2 - 1 / 0.2 - 1.5		
Stranded with ferrule with plastic sleeve	[mm <sup>2</sup> ]	0.25 - 1		
Stranded with TWIN ferrule with plastic sleeve	[mm <sup>2</sup> ]	0.5 - 1.5		
<b>Stripping length</b>	[mm]	7		
<b>Internal cylindrical gauge (IEC 60 947-1)</b>		A 3		
<b>Thread</b>		M 3		
<b>Torque</b>	[Nm]	0.5 - 0.6		
<b>Insulating material</b>		PA		
Inflammability class in acc. with UL 94		V0		



# MVSTBR 2,5 HC/...-ST(-5,08)

## Vertical Plugs

### 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.



**Note:**

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC plugs, 5.0 mm pitch,</b> plug-in direction vertical to the conductor axis, connection point facing the smooth wall (R) of the header, color: green	2	5	MVSTBR 2,5 HC/2-ST	19 12 29 4	50
	3	10	MVSTBR 2,5 HC/3-ST	19 12 30 4	
	4	15	MVSTBR 2,5 HC/4-ST	19 12 31 7	
	5	20	MVSTBR 2,5 HC/5-ST	19 12 32 0	
	6	25	MVSTBR 2,5 HC/6-ST	19 12 33 3	
	7	30	MVSTBR 2,5 HC/7-ST	19 12 34 6	
	8	35	MVSTBR 2,5 HC/8-ST	19 12 35 9	
	9	40	MVSTBR 2,5 HC/9-ST	19 12 36 2	
	10	45	MVSTBR 2,5 HC/10-ST	19 12 37 5	
	11	50	MVSTBR 2,5 HC/11-ST	19 12 38 8	
	12	55	MVSTBR 2,5 HC/12-ST	19 12 39 1	
	<b>COMBICON HC plugs, 5.08 mm pitch,</b> plug-in direction vertical to the conductor axis, connection point facing the smooth wall (R) of the header, color: green	2	5.08	MVSTBR 2,5 HC/2-ST-5,08	
3		10.16	MVSTBR 2,5 HC/3-ST-5,08	19 12 41 4	
4		15.24	MVSTBR 2,5 HC/4-ST-5,08	19 12 42 7	
5		20.32	MVSTBR 2,5 HC/5-ST-5,08	19 12 43 0	
6		25.40	MVSTBR 2,5 HC/6-ST-5,08	19 12 44 3	
7		30.48	MVSTBR 2,5 HC/7-ST-5,08	19 12 45 6	
8		35.56	MVSTBR 2,5 HC/8-ST-5,08	19 12 46 9	
9		40.64	MVSTBR 2,5 HC/9-ST-5,08	19 12 47 2	
10		45.72	MVSTBR 2,5 HC/10-ST-5,08	19 12 48 5	
11		50.80	MVSTBR 2,5 HC/11-ST-5,08	19 12 49 8	
12		55.88	MVSTBR 2,5 HC/12-ST-5,08	19 12 50 8	
(1) <b>Coding profile</b> , is inserted into the groove on the plug, red insulating material				<b>CP-MSTB</b>	17 34 63 4
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8 or SK 5,08/3,8</b> (see COMBICON catalog)		


**Technical data**

Dimensions	see description on page 13		
Pitch	[mm]	5 / 5.08	
Hole diameter	[mm]	-	
Pin dimensions	[mm]x[mm]	-	
<b>Technical data in accordance with IEC/ DIN VDE</b>			
Insulating material group	-	I	
Surge voltage category / contamination class	-/-	III / 3	III / 2
Rated voltage	[V]	250	320
Rated surge voltage	[kV]	4	4
Nominal current / cross section	[A]/[mm²]	16 / 2.5	
Maximum load current / cross section	[A]/[mm²]	16 / 2.5	
<b>Capacity connection</b>			
Solid / stranded / conductor sizes	[mm²]/[mm²]/AWG	0.2 - 2.5 / 0.2 - 2.5 / 24 - 12	
Stranded with ferrule without / with plastic sleeve	[mm²]	0.25 - 2.5 / 0.25 - 2.5	
<b>Multiple connection (2 conductors with same cross section)</b>			
Solid / stranded	[mm²]	0.2 - 1 / 0.2 - 1.5	
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 1	
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5 - 1.5	
<b>Stripping length</b>	[mm]	7	
<b>Internal cylindrical gauge (IEC 60 947-1)</b>		A 3	
<b>Thread</b>		M 3	
<b>Torque</b>	[Nm]	0.5 - 0.6	
<b>Insulating material</b>		PA	
<b>Inflammability class in acc. with UL 94</b>		V0	

# MVSTBR 2,5 HC/...-STF(-5,08) Vertical Plugs with Screw Flange 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.

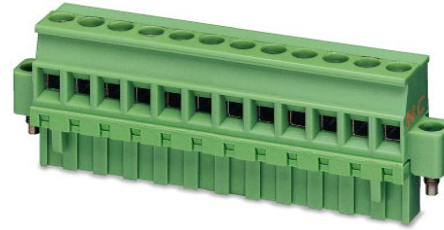

### Note:

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC plugs, 5.0 mm pitch,</b> with screw flange, color: green, connection point facing the smooth wall (R) of the header	2	5	MVSTBR 2,5 HC/2-STF	19 12 51 1	50
	3	10	MVSTBR 2,5 HC/3-STF	19 12 52 4	
	4	15	MVSTBR 2,5 HC/4-STF	19 12 53 7	
	5	20	MVSTBR 2,5 HC/5-STF	19 12 54 0	
	6	25	MVSTBR 2,5 HC/6-STF	19 12 55 3	
	7	30	MVSTBR 2,5 HC/7-STF	19 12 56 6	
	8	35	MVSTBR 2,5 HC/8-STF	19 12 57 9	
	9	40	MVSTBR 2,5 HC/9-STF	19 12 58 2	
	10	45	MVSTBR 2,5 HC/10-STF	19 12 59 5	
	11	50	MVSTBR 2,5 HC/11-STF	19 12 60 5	
	12	55	MVSTBR 2,5 HC/12-STF	19 12 61 8	
	<b>COMBICON HC plugs, 5.08 mm pitch,</b> with screw flange, color: green, connection point facing the smooth wall (R) of the header	2	5.08	MVSTBR 2,5 HC/2-STF-5,08	
3		10.16	MVSTBR 2,5 HC/3-STF-5,08	19 12 63 4	
4		15.24	MVSTBR 2,5 HC/4-STF-5,08	19 12 64 7	
5		20.32	MVSTBR 2,5 HC/5-STF-5,08	19 12 65 0	
6		25.40	MVSTBR 2,5 HC/6-STF-5,08	19 12 66 3	
7		30.48	MVSTBR 2,5 HC/7-STF-5,08	19 12 67 6	
8		35.56	MVSTBR 2,5 HC/8-STF-5,08	19 12 68 9	
9		40.64	MVSTBR 2,5 HC/9-STF-5,08	19 12 69 2	
10		45.72	MVSTBR 2,5 HC/10-STF-5,08	19 12 70 2	
11		50.80	MVSTBR 2,5 HC/11-STF-5,08	19 12 71 5	
12		55.88	MVSTBR 2,5 HC/12-STF-5,08	19 12 72 8	
(1) <b>Coding profile</b> , is inserted into the groove on the plug, red insulating material				<b>CP-MSTB</b>	17 34 63 4
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8 or SK 5,08/3,8</b> (see COMBICON catalog)		


### Technical data

Dimensions		see description page 13		
Pitch	[mm]	5 / 5.08		
Hole diameter	[mm]	-		
Pin dimensions	[mm]x[mm]	-		
<b>Technical data in accordance with IEC/ DIN VDE</b>				
Insulating material group	-	I		
Surge voltage category / contamination class	-/-	III / 3	III / 2	II / 2
Rated voltage	[V]	250	320	630
Rated surge voltage	[kV]	4	4	4
Nominal current / cross section	[A]/[mm <sup>2</sup> ]	16 / 2.5		
Maximum load current / cross section	[A]/[mm <sup>2</sup> ]	16 / 2.5		
<b>Capacity connection</b>				
Solid / stranded / conductor sizes	[mm <sup>2</sup> ]/[mm <sup>2</sup> ]/AWG	0.2 - 2.5 / 0.2 - 2.5 / 24 - 12		
Stranded with ferrule without / with plastic sleeve	[mm]	0.25 - 2.5 / 0.25 - 2.5		
<b>Multiple connection (2 conductors with same cross section)</b>				
Solid / stranded	[mm <sup>2</sup> ]	0.2 - 1 / 0.2 - 1.5		
Stranded with ferrule with plastic sleeve	[mm <sup>2</sup> ]	0.25 - 1		
Stranded with TWIN ferrule with plastic sleeve	[mm <sup>2</sup> ]	0.5 - 1.5		
<b>Stripping length</b>	[mm]	7		
<b>Internal cylindrical gauge (IEC 60 947-1)</b>		A 3		
<b>Thread</b>		M 3		
<b>Torque</b>	[Nm]	0.5 - 0.6		
<b>Insulating material</b>		PA		
<b>Inflammability class in acc. with UL 94</b>		V0		

# MVSTBW 2,5 HC/...-ST(-5,08) Vertical Plugs 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.

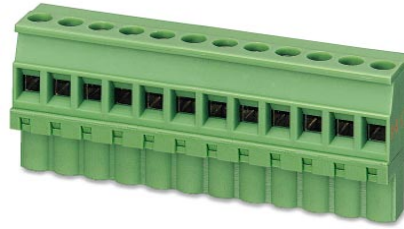

**Note:**

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC plugs, 5.0 mm pitch,</b> plug-in direction vertical to the conductor axis, connection point facing the rippled wall (W) of the header, color: green	2	5	MVSTBW 2,5 HC/2-ST	19 12 73 1	50
	3	10	MVSTBW 2,5 HC/3-ST	19 12 74 4	
	4	15	MVSTBW 2,5 HC/4-ST	19 12 75 7	
	5	20	MVSTBW 2,5 HC/5-ST	19 12 76 0	
	6	25	MVSTBW 2,5 HC/6-ST	19 12 77 3	
	7	30	MVSTBW 2,5 HC/7-ST	19 12 78 6	
	8	35	MVSTBW 2,5 HC/8-ST	19 12 79 9	
	9	40	MVSTBW 2,5 HC/9-ST	19 12 80 9	
	10	45	MVSTBW 2,5 HC/10-ST	19 12 81 2	
	11	50	MVSTBW 2,5 HC/11-ST	19 12 82 5	
	12	55	MVSTBW 2,5 HC/12-ST	19 12 83 8	
	<b>COMBICON HC plugs, 5.08 mm pitch,</b> plug-in direction vertical to the conductor axis, connection point facing the rippled wall (W) of the header, color: green	2	5.08	MVSTBW 2,5 HC/2-ST-5,08	
3		10.16	MVSTBW 2,5 HC/3-ST-5,08	19 12 85 4	
4		15.24	MVSTBW 2,5 HC/4-ST-5,08	19 12 86 7	
5		20.32	MVSTBW 2,5 HC/5-ST-5,08	19 12 87 0	
6		25.40	MVSTBW 2,5 HC/6-ST-5,08	19 12 88 3	
7		30.48	MVSTBW 2,5 HC/7-ST-5,08	19 12 89 6	
8		35.56	MVSTBW 2,5 HC/8-ST-5,08	19 12 90 6	
9		40.64	MVSTBW 2,5 HC/9-ST-5,08	19 12 91 9	
10		45.72	MVSTBW 2,5 HC/10-ST-5,08	19 12 92 2	
11		50.80	MVSTBW 2,5 HC/11-ST-5,08	19 12 93 5	
12		55.88	MVSTBW 2,5 HC/12-ST-5,08	19 12 94 8	
(1) <b>Coding profile</b> , is inserted into the groove on the plug, red insulating material				<b>CP-MSTB</b>	17 34 63 4
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8 or SK 5,08/3,8</b> (see COMBICON catalog)		

**Technical data**

Dimensions	see description on page 13		
Pitch	[mm]	5 / 5.08	
Hole diameter	[mm]	-	
Pin dimensions	[mm]x[mm]	-	
<b>Technical data in accordance with IEC/ DIN VDE</b>			
Insulating material group	-	I	
Surge voltage category / contamination class	-/-	III / 3	III / 2 II / 2
Rated voltage	[V]	250	320 630
Rated surge voltage	[kV]	4	4 4
Nominal current / cross section	[A]/[mm²]	16 / 2.5	
Maximum load current / cross section	[A]/[mm²]	16 / 2.5	
<b>Capacity connection</b>			
Solid / stranded / conductor sizes	[mm²]/[mm²]/AWG	0.2 - 2.5 / 0.2 - 2.5 / 24 - 12	
Stranded with ferrule without / with plastic sleeve	[mm²]	0.25 - 2.5 / 0.25 - 2.5	
<b>Multiple connection (2 conductors with same cross section)</b>			
Solid / stranded	[mm²]	0.2 - 1 / 0.2 - 1.5	
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 1	
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5 - 1.5	
<b>Stripping length</b>	[mm]	7	
<b>Internal cylindrical gauge (IEC 60 947-1)</b>		A 3	
<b>Thread</b>		M 3	
<b>Torque</b>	[Nm]	0.5 - 0.6	
<b>Insulating material</b>		PA	
Inflammability class in acc. with UL 94		V0	



# MVSTBW 2,5 HC/...-STF(-5,08) Vertical Plugs with Screw Flange 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.



### Note:

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC plugs, 5.0 mm pitch,</b> with screw flange, color: green, connection point facing the rippled wall (W) of the header	2	5	MVSTBW 2,5 HC/2-STF	19 12 95 1	50
	3	10	MVSTBW 2,5 HC/3-STF	19 12 96 4	
	4	15	MVSTBW 2,5 HC/4-STF	19 12 97 7	
	5	20	MVSTBW 2,5 HC/5-STF	19 12 98 0	
	6	25	MVSTBW 2,5 HC/6-STF	19 12 99 3	
	7	30	MVSTBW 2,5 HC/7-STF	19 13 00 2	
	8	35	MVSTBW 2,5 HC/8-STF	19 13 01 5	
	9	40	MVSTBW 2,5 HC/9-STF	19 13 02 8	
	10	45	MVSTBW 2,5 HC/10-STF	19 13 03 1	
	11	50	MVSTBW 2,5 HC/11-STF	19 13 04 4	
	12	55	MVSTBW 2,5 HC/12-STF	19 13 05 7	
	<b>COMBICON HC plugs, 5.08 mm pitch,</b> with screw flange, color: green, connection point facing the rippled wall (W) of the header	2	5.08	MVSTBW 2,5 HC/2-STF-5,08	
3		10.16	MVSTBW 2,5 HC/3-STF-5,08	19 13 07 3	
4		15.24	MVSTBW 2,5 HC/4-STF-5,08	19 13 08 6	
5		20.32	MVSTBW 2,5 HC/5-STF-5,08	19 13 09 9	
6		25.40	MVSTBW 2,5 HC/6-STF-5,08	19 13 10 9	
7		30.48	MVSTBW 2,5 HC/7-STF-5,08	19 13 11 2	
8		35.56	MVSTBW 2,5 HC/8-STF-5,08	19 13 12 5	
9		40.64	MVSTBW 2,5 HC/9-STF-5,08	19 13 13 8	
10		45.72	MVSTBW 2,5 HC/10-STF-5,08	19 13 14 1	
11		50.80	MVSTBW 2,5 HC/11-STF-5,08	19 13 15 4	
12		55.88	MVSTBW 2,5 HC/12-STF-5,08	19 13 16 7	
(1) <b>Coding profile</b> , is inserted into the groove on the plug, red insulating material				<b>CP-MSTB</b>	17 34 63 4
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8 or SK 5,08/3,8</b> (see COMBICON catalog)		

### Technical data


Dimensions	see description on page 13		
Pitch	[mm]	5 / 5.08	
Hole diameter	[mm]	-	
Pin dimensions	[mm]x[mm]	-	
<b>Technical data in accordance with IEC/ DIN VDE</b>			
Insulating material group	-	I	
Surge voltage category / contamination class	-/-	III / 3	III / 2
Rated voltage	[V]	250	320
Rated surge voltage	[kV]	4	4
Nominal current / cross section	[A]/[mm <sup>2</sup> ]	16 / 2.5	
Maximum load current / cross section	[A]/[mm <sup>2</sup> ]	16 / 2.5	
<b>Capacity connection</b>			
Solid / stranded / conductor sizes	[mm <sup>2</sup> ]/[mm <sup>2</sup> ]/AWG	0.2 - 2.5 / 0.2 - 2.5 / 24 - 12	
Stranded with ferrule without / with plastic sleeve	[mm <sup>2</sup> ]	0.25 - 2.5 / 0.25 - 2.5	
<b>Multiple connection (2 conductors with same cross section)</b>			
Solid / stranded	[mm <sup>2</sup> ]	0.2 - 1 / 0.2 - 1.5	
Stranded with ferrule with plastic sleeve	[mm <sup>2</sup> ]	0.25 - 1	
Stranded with TWIN ferrule with plastic sleeve	[mm <sup>2</sup> ]	0.5 - 1.5	
<b>Stripping length</b>	[mm]	7	
<b>Internal cylindrical gauge (IEC 60 947-1)</b>		A 3	
<b>Thread</b>		M 3	
<b>Torque</b>	[Nm]	0.5 - 0.6	
<b>Insulating material</b>		PA	
Inflammability class in acc. with UL 94		V0	



# MSTBA 2,5 HC/...-G(-5,08) 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.



Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.

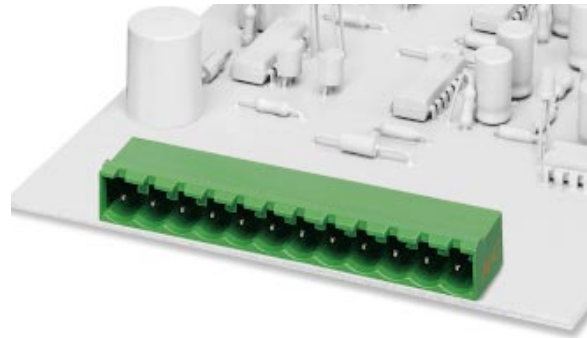

**Note:**

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.


Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC headers, 5.0 mm pitch,</b> plug-in direction parallel to the p.c.b., color: green					
	2	5	MSTBA 2,5 HC/2-G	19 23 75 9	50
	3	10	MSTBA 2,5 HC/3-G	19 23 76 2	
	4	15	MSTBA 2,5 HC/4-G	19 23 77 5	
	5	20	MSTBA 2,5 HC/5-G	19 23 78 8	
	6	25	MSTBA 2,5 HC/6-G	19 23 79 1	
	7	30	MSTBA 2,5 HC/7-G	19 23 80 1	
	8	35	MSTBA 2,5 HC/8-G	19 23 81 4	
	9	40	MSTBA 2,5 HC/9-G	19 23 82 7	
	10	45	MSTBA 2,5 HC/10-G	19 23 83 0	
	11	50	MSTBA 2,5 HC/11-G	19 23 84 3	
	12	55	MSTBA 2,5 HC/12-G	19 23 85 6	
<b>COMBICON HC headers, 5.08 mm pitch,</b> plug-in direction parallel to the p.c.b., color: green					
	2	5.08	MSTBA 2,5 HC/2-G-5,08	19 23 86 9	50
	3	10.16	MSTBA 2,5 HC/3-G-5,08	19 23 87 2	
	4	15.24	MSTBA 2,5 HC/4-G-5,08	19 23 88 5	
	5	20.32	MSTBA 2,5 HC/5-G-5,08	19 23 89 8	
	6	25.40	MSTBA 2,5 HC/6-G-5,08	19 23 90 8	
	7	30.48	MSTBA 2,5 HC/7-G-5,08	19 23 91 1	
	8	35.56	MSTBA 2,5 HC/8-G-5,08	19 23 92 4	
	9	40.64	MSTBA 2,5 HC/9-G-5,08	19 23 93 7	
	10	45.72	MSTBA 2,5 HC/10-G-5,08	19 23 94 0	
	11	50.80	MSTBA 2,5 HC/11-G-5,08	19 12 95 3	
	12	55.88	MSTBA 2,5 HC/12-G-5,08	19 12 96 6	
(1) <b>Coding section</b> , inserted into the recess in the header, red insulating material			<b>CR-MSTB</b>	<b>17 34 40 1</b>	
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8 or SK 5,08/3,8</b> (see COMBICON catalog)		
<b>Technical data</b>			see description		
Dimensions			5 / 5.08		
Pitch	[mm]		1.4		
Hole diameter	[mm]		1 x 1		
Pin dimensions	[mm]x[mm]				
<b>Technical data in accordance with IEC/ DIN VDE</b>					
Insulating material group	-		IIIa	II / 2	
Surge voltage category / contamination class	-/-		III / 3	III / 2	II / 2
Rated voltage	[V]		250	320	400
Rated surge voltage	[kV]		4	4	4
Nominal current / cross section	[A]/[mm <sup>2</sup> ]		16 / -		
Maximum load current / cross section	[A]/[mm <sup>2</sup> ]		16 / -		
<b>Insulating material</b>			PBT		
Inflammability class in acc. with UL 94			V0		



# MSTBVA 2,5 HC/...-G(-5,08) 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.

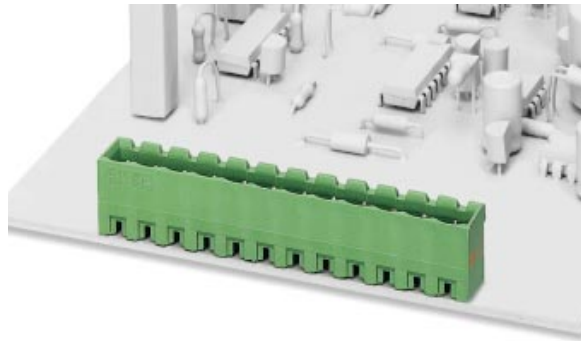



**Note:**

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC headers vertical, 5.0 mm pitch, color: green, plug-in direction vertical to the p.c.b.</b>					
	2	5	MSTBVA 2,5 HC/2-G	19 24 19 8	50
	3	10	MSTBVA 2,5 HC/3-G	19 24 20 8	
	4	15	MSTBVA 2,5 HC/4-G	19 24 21 1	
	5	20	MSTBVA 2,5 HC/5-G	19 24 22 4	
	6	25	MSTBVA 2,5 HC/6-G	19 24 23 7	
	7	30	MSTBVA 2,5 HC/7-G	19 24 24 0	
	8	35	MSTBVA 2,5 HC/8-G	19 24 25 3	
	9	40	MSTBVA 2,5 HC/9-G	19 24 26 6	
	10	45	MSTBVA 2,5 HC/10-G	19 24 27 9	
	11	50	MSTBVA 2,5 HC/11-G	19 24 28 2	
	12	55	MSTBVA 2,5 HC/12-G	19 24 29 5	
<b>COMBICON HC headers vertical, 5.08 mm pitch, color: green, plug-in direction vertical to the p.c.b.</b>					
	2	5.08	MSTBVA 2,5 HC/2-G-5,08	19 24 30 5	50
	3	10.16	MSTBVA 2,5 HC/3-G-5,08	19 24 31 8	
	4	15.24	MSTBVA 2,5 HC/4-G-5,08	19 24 32 1	
	5	20.32	MSTBVA 2,5 HC/5-G-5,08	19 24 33 4	
	6	25.40	MSTBVA 2,5 HC/6-G-5,08	19 24 34 7	
	7	30.48	MSTBVA 2,5 HC/7-G-5,08	19 24 35 0	
	8	35.56	MSTBVA 2,5 HC/8-G-5,08	19 24 36 3	
	9	40.64	MSTBVA 2,5 HC/9-G-5,08	19 24 37 6	
	10	45.72	MSTBVA 2,5 HC/10-G-5,08	19 24 38 9	
	11	50.80	MSTBVA 2,5 HC/11-G-5,08	19 24 39 2	
	12	55.88	MSTBVA 2,5 HC/12-G-5,08	19 24 40 2	
(1) <b>Coding section</b> , inserted into the recess in the header, red insulating material			<b>CR-MSTB</b>	<b>17 34 40 1</b>	
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8 or SK 5,08/3,8</b> (see COMBICON catalog)		

**Technical data**


Dimensions		see description		
Pitch	[mm]	5 / 5.08		
Hole diameter	[mm]	1.4		
Pin dimensions	[mm]x[mm]	1 x 1		
<b>Technical data in accordance with IEC/ DIN VDE</b>				
Insulating material group	-	I		
Surge voltage category / contamination class	-/-	III / 3	III / 2	II / 2
Rated voltage	[V]	250	320	400
Rated surge voltage	[kV]	4	4	4
Nominal current / cross section	[A]/[mm <sup>2</sup> ]	16 / -		
Maximum load current / cross section	[A]/[mm <sup>2</sup> ]	16 / -		
<b>Insulating material</b>		PA		
Inflammability class in acc. with UL 94		V0		

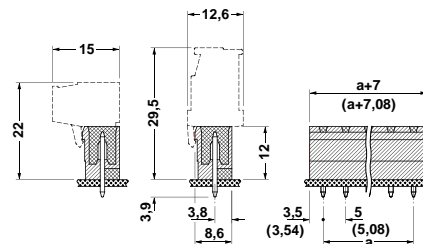

# MSTB 2,5 HC/...-GF(-5,08) with Screw Flange 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.

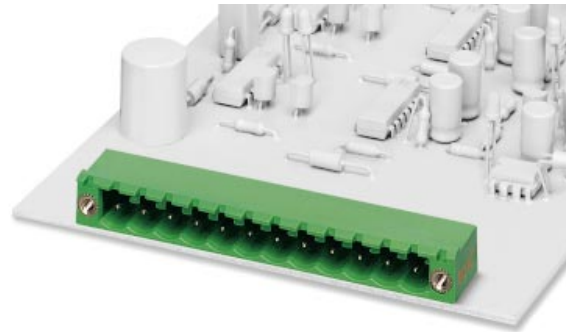



**Note:**

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC headers,</b>					
5.0 mm pitch, color: green, with threaded flange, plug-in direction parallel to the p.c.b.					
	2	5	MSTB 2,5 HC/2-GF	19 23 97 9	50
	3	10	MSTB 2,5 HC/3-GF	19 23 98 2	
	4	15	MSTB 2,5 HC/4-GF	19 23 99 5	
	5	20	MSTB 2,5 HC/5-GF	19 24 00 4	
	6	25	MSTB 2,5 HC/6-GF	19 24 01 7	
	7	30	MSTB 2,5 HC/7-GF	19 24 02 0	
	8	35	MSTB 2,5 HC/8-GF	19 24 03 3	
	9	40	MSTB 2,5 HC/9-GF	19 24 04 6	
	10	45	MSTB 2,5 HC/10-GF	19 24 05 9	
	11	50	MSTB 2,5 HC/11-GF	19 24 06 2	
	12	55	MSTB 2,5 HC/12-GF	19 24 07 5	
<b>COMBICON HC headers,</b>					
5.08 mm pitch, color: green, with threaded flange, plug-in direction parallel to the p.c.b.					
	2	5.08	MSTB 2,5 HC/2-GF-5,08	19 24 08 8	50
	3	10.16	MSTB 2,5 HC/3-GF-5,08	19 24 09 1	
	4	15.24	MSTB 2,5 HC/4-GF-5,08	19 24 10 1	
	5	20.32	MSTB 2,5 HC/5-GF-5,08	19 24 11 4	
	6	25.40	MSTB 2,5 HC/6-GF-5,08	19 24 12 7	
	7	30.48	MSTB 2,5 HC/7-GF-5,08	19 24 13 0	
	8	35.56	MSTB 2,5 HC/8-GF-5,08	19 24 14 3	
	9	40.64	MSTB 2,5 HC/9-GF-5,08	19 24 15 6	
	10	45.72	MSTB 2,5 HC/10-GF-5,08	19 24 16 9	
	11	50.80	MSTB 2,5 HC/11-GF-5,08	19 24 17 2	
	12	55.88	MSTB 2,5 HC/12-GF-5,08	19 24 18 5	
(1) <b>Coding section</b> , inserted into the recess in the header, red insulating material			<b>CR-MSTB</b>	17 34 40 1	
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8 or SK 5,08/3,8</b> (see COMBICON catalog)		

**Technical data**


Dimensions		see description		
Pitch	[mm]	5 / 5.08		
Hole diameter	[mm]	1.4		
Pin dimensions	[mm]x[mm]	1 x 1		
<b>Technical data in accordance with IEC/ DIN VDE</b>				
Insulating material group	-	IIIa		
Surge voltage category / contamination class	-/-	III / 3	III / 2	II / 2
Rated voltage	[V]	250	320	400
Rated surge voltage	[kV]	4	4	4
Nominal current / cross section	[A]/[mm²]	16 / -		
Maximum load current / cross section	[A]/[mm²]	16 / -		
<b>Insulating material</b>		PBT		
Inflammability class in acc. with UL 94		V0		

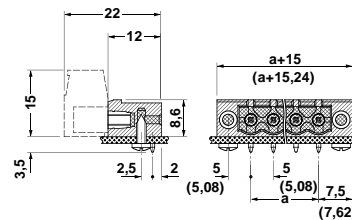

# MSTBV 2,5 HC/...-GF(-5,08) with Screw Flange 5.0 or 5.08 mm Pitch


The designation "HC" is printed in red to provide clear identification of "high current" plugs and headers.

Only the MSTB 2,5 HC headers provided are allowed to be used for carrying the higher current load of 16 A.

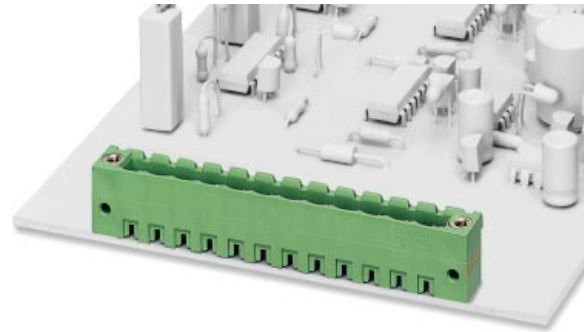



**Note:**

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.


Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
<b>COMBICON HC headers vertical, 5.0 mm pitch, color: green, with threaded flange, plug-in direction vertical to the p.c.b.</b>					
	2	5	MSTBV 2,5 HC/2-GF	19 24 41 5	50
	3	10	MSTBV 2,5 HC/3-GF	19 24 42 8	
	4	15	MSTBV 2,5 HC/4-GF	19 24 43 1	
	5	20	MSTBV 2,5 HC/5-GF	19 24 44 4	
	6	25	MSTBV 2,5 HC/6-GF	19 24 45 7	
	7	30	MSTBV 2,5 HC/7-GF	19 24 46 0	
	8	35	MSTBV 2,5 HC/8-GF	19 24 47 3	
	9	40	MSTBV 2,5 HC/9-GF	19 24 48 6	
	10	45	MSTBV 2,5 HC/10-GF	19 24 49 9	
	11	50	MSTBV 2,5 HC/11-GF	19 24 50 9	
	12	55	MSTBV 2,5 HC/12-GF	19 24 51 2	
<b>COMBICON HC headers vertical, 5.08 mm pitch, color: green, with threaded flange, plug-in direction vertical to the p.c.b.</b>					
	2	5.08	MSTBV 2,5 HC/2-GF-5,08	19 24 52 5	50
	3	10.16	MSTBV 2,5 HC/3-GF-5,08	19 24 53 8	
	4	15.24	MSTBV 2,5 HC/4-GF-5,08	19 24 54 1	
	5	20.32	MSTBV 2,5 HC/5-GF-5,08	19 24 55 4	
	6	25.40	MSTBV 2,5 HC/6-GF-5,08	19 24 56 7	
	7	30.48	MSTBV 2,5 HC/7-GF-5,08	19 24 57 0	
	8	35.56	MSTBV 2,5 HC/8-GF-5,08	19 24 58 3	
	9	40.64	MSTBV 2,5 HC/9-GF-5,08	19 24 59 6	
	10	45.72	MSTBV 2,5 HC/10-GF-5,08	19 24 60 6	
	11	50.80	MSTBV 2,5 HC/11-GF-5,08	19 24 61 9	
	12	55.88	MSTBV 2,5 HC/12-GF-5,08	19 24 62 2	
(1) <b>Coding section</b> , inserted into the recess in the header, red insulating material			<b>CR-MSTB</b>	17 34 40 1	
(2) <b>Marker card</b> , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			<b>SK 5/3,8 or SK 5,08/3,8</b> (see COMBICON catalog)		

**Technical data**


Dimensions		see description		
Pitch	[mm]	5 / 5.08		
Hole diameter	[mm]	1.4		
Pin dimensions	[mm]x[mm]	1 x 1		
<b>Technical data in accordance with IEC/ DIN VDE</b>			I	
Insulating material group	-			
Surge voltage category / contamination class	-/-	III / 3	III / 2	II / 2
Rated voltage	[V]	250	320	400
Rated surge voltage	[kV]	4	4	4
Nominal current / cross section	[A]/[mm <sup>2</sup> ]		16 / -	
Maximum load current / cross section	[A]/[mm <sup>2</sup> ]		16 / -	
<b>Insulating material</b>			PA	
Inflammability class in acc. with UL 94			V0	




# Descriptions




MSTB 2,5 HC/...-ST(-5,08)




MSTB 2,5 HC/...-STF(-5,08)




MVSTBR 2,5 HC/...-ST(-5,08)



MVSTBR 2,5 HC/...-STF(-5,08)



MVSTBW 2,5 HC/...-STF(-5,08)

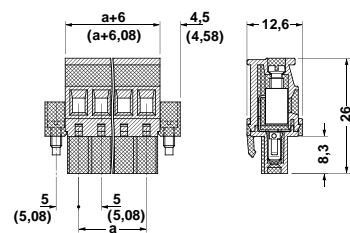

MVSTBW 2,5 HC/...-STF(-5,08)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)