

## Description

The 74HCT138 is a high speed CMOS device that is designed to be pin compatible with 74LS low power Schottky types.

The device accepts a three bit binary weighted address on input pins A0, A1 and A2 and when enabled will produce one active low output with the remaining seven being high.

There are two active LOW enable inputs  $\bar{E}1$  and  $\bar{E}2$ , and one active HIGH enable input E3. The disabled device state results in all outputs being high. The enable state occurs with  $\bar{E}1$  and  $\bar{E}2$  asserted low and E3 asserted high.


The multiple enable lines allow for the parallel expansion of decoders to create 4-to-16 line versions with no additional parts and 5-to-32 versions with the addition of a single inverter.

## Features

- Wide Supply Voltage Range from 4.5V to 5.5V
- Sinks or sources 8mA at  $V_{CC} = 4.5V$
- CMOS low power consumption
- Schmitt Trigger Action at All Inputs
- Inputs accept up to 6.0V
- ESD Protection Tested per JESD 22
  - Exceeds 200-V Machine Model (A115-A)
  - Exceeds 2000-V Human Body Model (A114-A)
  - Exceeds 1000-V Charged Device Model (C101C)
- Latch-Up Exceeds 250mA per JESD 78, Class II
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**

Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.  
 2. See <http://www.diodes.com> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.  
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

## Pin Assignments

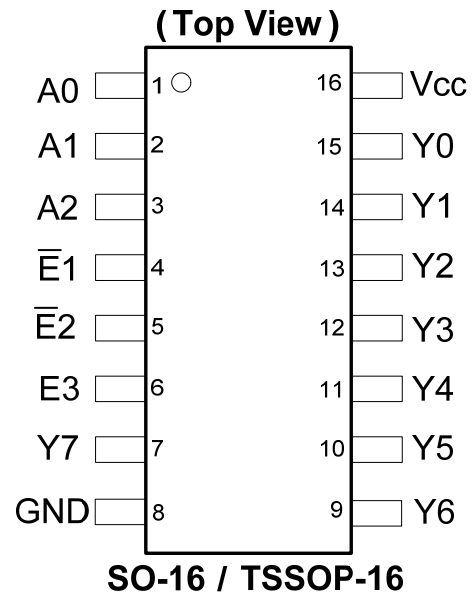

## Applications

- Memory chip select decoding
- Demultiplexing
- Single line peripheral control
- Allow simple serial bit streams from a microcontroller to control as many peripheral lines as needed.

[Click here for ordering information, located at the end of datasheet](#)


## Pin Descriptions

| Pin Number | Pin Name        | Description                  |
|------------|-----------------|------------------------------|
| 1          | A0              | Address Input 0              |
| 2          | A1              | Address Input 1              |
| 3          | A2              | Address Input 2              |
| 4          | $\bar{E}1$      | Enable Input 1 (active LOW)  |
| 5          | $\bar{E}2$      | Enable Input 2 (active LOW)  |
| 6          | E3              | Enable Input 3 (active HIGH) |
| 7          | Y7              | Output 7 (active LOW)        |
| 8          | GND             | Ground                       |
| 9          | Y6              | Output 6 (active LOW)        |
| 10         | Y5              | Output 5 (active LOW)        |
| 11         | Y4              | Output 4 (active LOW)        |
| 12         | Y3              | Output 3 (active LOW)        |
| 13         | Y2              | Output 2 (active LOW)        |
| 14         | Y1              | Output 1 (active LOW)        |
| 15         | Y0              | Output 0 (active LOW)        |
| 16         | V <sub>cc</sub> | Supply Voltage               |

## Function Table Diagram

| Control    |            |    | Input |    |    | Output     |            |            |            |            |            |            |            |
|------------|------------|----|-------|----|----|------------|------------|------------|------------|------------|------------|------------|------------|
| $\bar{E}1$ | $\bar{E}2$ | E3 | A2    | A1 | A0 | $\bar{Y}7$ | $\bar{Y}6$ | $\bar{Y}5$ | $\bar{Y}4$ | $\bar{Y}3$ | $\bar{Y}2$ | $\bar{Y}1$ | $\bar{Y}0$ |
| H          | X          | X  | X     | X  | X  | H          | H          | H          | H          | H          | H          | H          | H          |
| X          | H          | X  | -     | -  | -  | -          | -          | -          | -          | -          | -          | -          | -          |
| X          | X          | L  | -     | -  | -  | -          | -          | -          | -          | -          | -          | -          | -          |
| L          | L          | H  | -     | -  | -  | -          | -          | -          | -          | -          | -          | -          | -          |
| -          | -          | -  | L     | L  | L  | H          | H          | H          | H          | H          | H          | H          | L          |
| -          | -          | -  | L     | L  | H  | H          | H          | H          | H          | H          | H          | L          | H          |
| -          | -          | -  | L     | H  | L  | H          | H          | H          | H          | H          | L          | H          | H          |
| -          | -          | -  | L     | H  | H  | H          | H          | H          | H          | L          | H          | H          | H          |
| -          | -          | -  | H     | L  | L  | H          | H          | H          | L          | H          | H          | H          | H          |
| -          | -          | -  | H     | L  | H  | H          | H          | L          | H          | H          | H          | H          | H          |
| -          | -          | -  | H     | H  | L  | H          | L          | H          | H          | H          | H          | H          | H          |
| -          | -          | -  | H     | H  | H  | L          | H          | H          | H          | H          | H          | H          | H          |

Logic Diagram

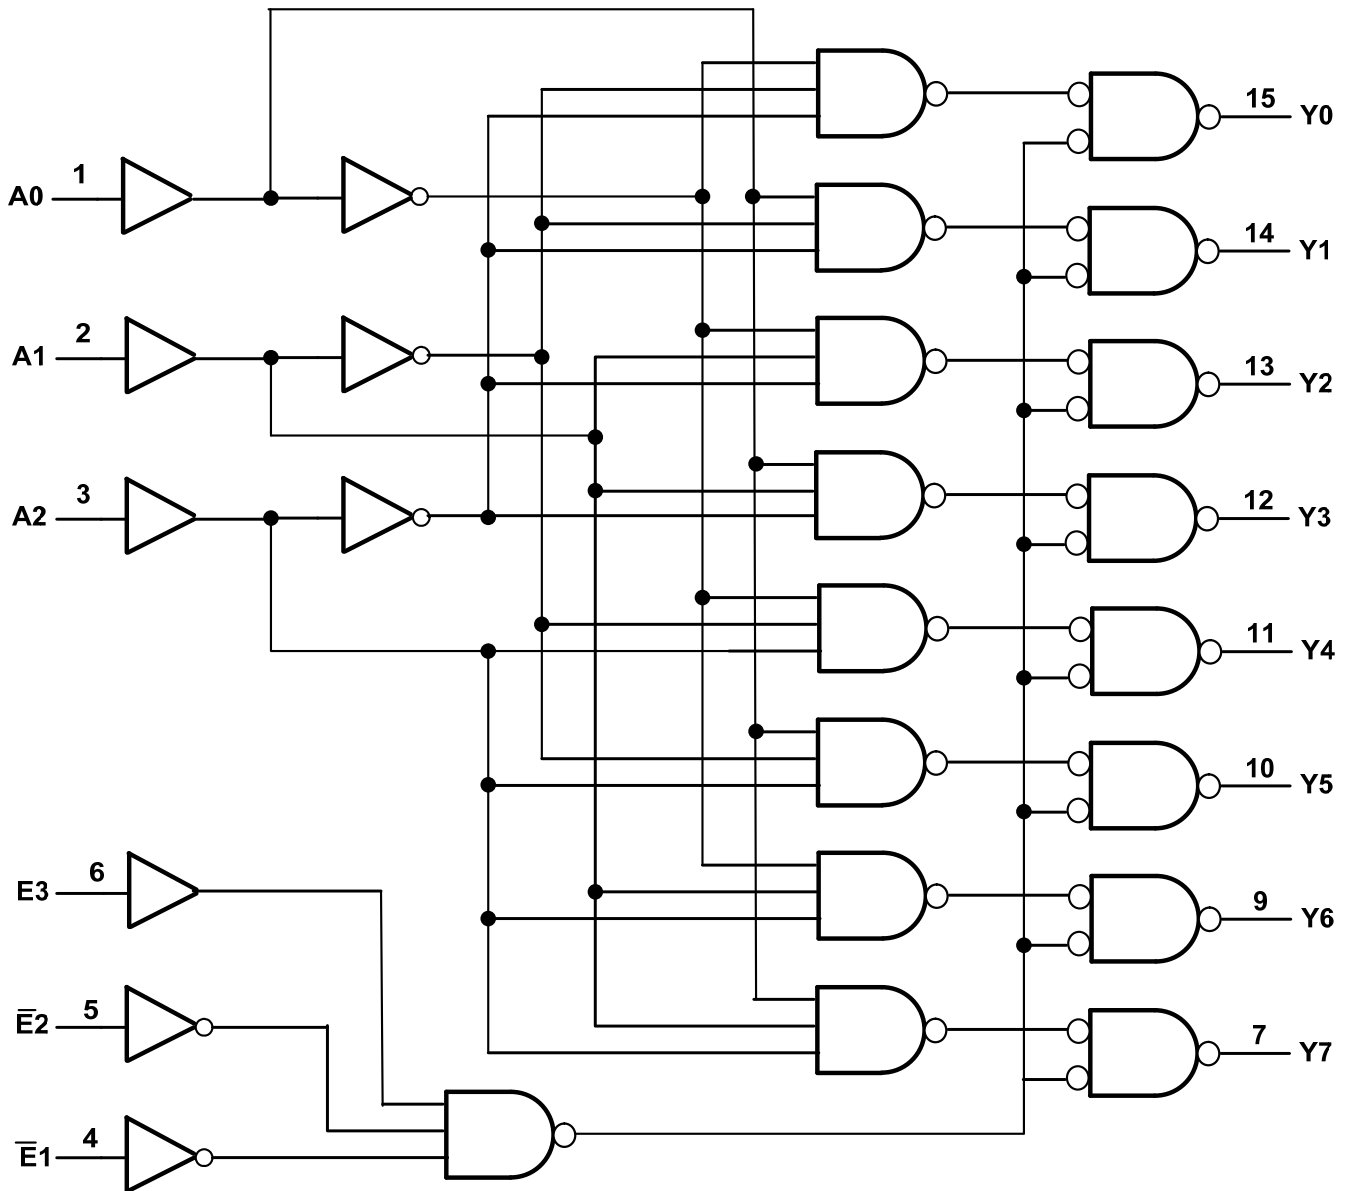

---

**Absolute Maximum Ratings** (Note 4) (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)
 

---

| Symbol    | Description                                       | Rating           | Unit             |
|-----------|---------------------------------------------------|------------------|------------------|
| ESD HBM   | Human Body Model ESD Protection                   | 2                | KV               |
| ESD CDM   | Charged Device Model ESD Protection               | 1                | KV               |
| ESD MM    | Machine Model ESD Protection                      | 200              | V                |
| $V_{CC}$  | Supply Voltage Range                              | -0.5 to 7.0      | V                |
| $V_I$     | Input Voltage Range                               | -0.5 to 7.0      | V                |
| $V_O$     | Voltage Applied to Output in High or Low State    | -0.3 to $V_{CC}$ | V                |
| $I_{IK}$  | Input Clamp Current $V_I < -0.5\text{V}$          | -20              | mA               |
| $I_{IK}$  | Input Clamp Current $V_I > V_{CC} + 0.5\text{V}$  | 20               | mA               |
| $I_{OK}$  | Output Clamp Current $V_O < -0.5\text{V}$         | -20              | mA               |
| $I_{OK}$  | Output Clamp Current $V_O > V_{CC} + 0.5\text{V}$ | 20               | mA               |
| $I_O$     | Continuous Output Current                         | +/- 25           | mA               |
| $I_{CC}$  | Continuous Current Through $V_{CC}$               | 50               | mA               |
| $I_{GND}$ | Continuous Current Through GND                    | -50              | mA               |
| $T_J$     | Operating Junction Temperature                    | -40 to 150       | $^\circ\text{C}$ |
| $T_{STG}$ | Storage Temperature                               | -65 to 150       | $^\circ\text{C}$ |
| $P_{TOT}$ | Total Power Dissipation                           | 500              | mW               |

Note: 4. Stresses beyond the absolute maximum may result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.

---

**Recommended Operating Conditions** (Note 5) (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)
 

---

| Symbol              | Parameter                          | Conditions             | Min | Max      | Unit             |
|---------------------|------------------------------------|------------------------|-----|----------|------------------|
| $V_{CC}$            | Supply Voltage                     | -                      | 4.5 | 5.5      | V                |
| $V_I$               | Input Voltage                      | -                      | 0   | $V_{CC}$ | V                |
| $V_O$               | Output Voltage                     | Active Mode            | 0   | $V_{CC}$ | V                |
| $\Delta t/\Delta V$ | Input transition rise or fall rate | $V_{CC} = 4.5\text{V}$ | -   | 100      | ns/V             |
| $T_A$               | Operating free-air temperature     | -                      | -40 | 125      | $^\circ\text{C}$ |

Note: 5. Unused inputs should be held at  $V_{CC}$  or Ground.

**Electrical Characteristics** (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

| Symbol          | Parameter                 | Test Conditions                                                                               | Vcc          | $T_A = 25^\circ\text{C}$ |                 |           | $-40^\circ\text{C to } 85^\circ\text{C}$ |         | $-40^\circ\text{C to } 125^\circ\text{C}$ |         | Unit          |               |
|-----------------|---------------------------|-----------------------------------------------------------------------------------------------|--------------|--------------------------|-----------------|-----------|------------------------------------------|---------|-------------------------------------------|---------|---------------|---------------|
|                 |                           |                                                                                               |              | Min                      | Typ             | Max       | Min                                      | Max     | Min                                       | Max     |               |               |
| $V_{IH}$        | High-level Input Voltage  | –                                                                                             | 4.5V to 5.5V | 2.0                      | 1.6             | –         | 2.0                                      | –       | 2.0                                       | –       | V             |               |
| $V_{IL}$        | Low-level input voltage   | –                                                                                             | 4.5V to 5.5V | –                        | 1.2             | 0.8       | –                                        | 0.8     | –                                         | 0.8     | V             |               |
| $V_{OH}$        | High Level Output Voltage | $I_{OH} = -20 \mu\text{A}$                                                                    | 4.5V         | 4.4                      | 4.5             | –         | 4.4                                      | –       | 4.4                                       | –       | V             |               |
|                 |                           | $I_{OH} = -4 \text{ mA}$                                                                      | 4.5V         | 3.98                     | 4.32            | –         | 3.85                                     | –       | 3.7                                       | –       |               |               |
| $V_{OL}$        | Low-level Output Voltage  | $I_{OL} = 20 \mu\text{A}$                                                                     | 4.5V         | –                        | 0               | 0.1       | –                                        | 0.1     | –                                         | 0.1     | V             |               |
|                 |                           | $I_{OL} = 4 \text{ mA}$                                                                       | 4.5V         | –                        | 0.15            | 0.26      | –                                        | 0.33    | –                                         | 0.4     |               |               |
| $I_i$           | Input Current             | $V_i = \text{GND to } 5.5 \text{ V}$                                                          | 5.5V         | –                        | –               | $\pm 0.1$ | –                                        | $\pm 1$ | –                                         | $\pm 1$ | $\mu\text{A}$ |               |
| $I_{CC}$        | Supply Current            | $V_i = \text{GND or } V_{CC}$<br>$I_o = 0$                                                    | 5.5V         | –                        | –               | 8.0       | –                                        | 80      | –                                         | 160     | $\mu\text{A}$ |               |
| $\Delta I_{CC}$ | Additional Supply Current | Test Per Pin<br>$V_i = V_{CC} - 2.1 \text{ V}$<br>Other<br>$V_i = V_{CC}$ or GND<br>$I_o = 0$ | PINS<br>An   | 4.5V to 5.5V             | –               | 150       | 540                                      | –       | 675                                       | –       | 735           | $\mu\text{A}$ |
|                 |                           |                                                                                               |              |                          | PIN $\bar{E}_n$ | –         | 125                                      | 450     | –                                         | 563     | –             |               |
|                 |                           | PIN E3                                                                                        | –            |                          | 100             | 360       | –                                        | 450     | –                                         | 490     | $\mu\text{A}$ |               |
| $C_i$           | Input Capacitance         | $V_i = V_{CC}$ or GND                                                                         | 5.5V         | –                        | 4               | 10        | –                                        | 10      | –                                         | 10      | pF            |               |

**Switching Characteristics**


| Symbol / Parameter                            | Pins                       | Test Conditions | Vcc   | $T_A = 25^\circ\text{C}$ |      |     | $-40^\circ\text{C to } 85^\circ\text{C}$ |     | $-40^\circ\text{C to } 125^\circ\text{C}$ |     | Unit |
|-----------------------------------------------|----------------------------|-----------------|-------|--------------------------|------|-----|------------------------------------------|-----|-------------------------------------------|-----|------|
|                                               |                            |                 |       | Min                      | Typ. | Max | Min                                      | Max | Min                                       | Max |      |
| $t_{PLH}$ ,<br>$t_{PLH}$<br>Propagation Delay | An to $\bar{Y}_n$          | Figure 2        | 4.5V  | –                        | 20   | 35  | –                                        | 35  | –                                         | 45  | ns   |
|                                               |                            |                 | 5.0V  | –                        | 17   | –   | –                                        | –   | –                                         |     |      |
|                                               | E3 to $\bar{Y}_n$          | Figure 2        | 4.5V  | –                        | 18   | 40  | –                                        | 40  | –                                         | 45  |      |
|                                               |                            |                 | 5.0V  | –                        | 19   | –   | –                                        | –   | –                                         |     |      |
|                                               | $\bar{E}_n$ to $\bar{Y}_n$ | Figure 2        | 4.5V  | –                        | 19   | 40  | –                                        | 40  | –                                         | 45  |      |
| 5.0V                                          | –                          | 19              | –     | –                        | –    | –   |                                          |     |                                           |     |      |
| $t_{TLH}$ ,<br>$t_{THL}$<br>Transition Time   | $\bar{Y}_n$                | Figure 2        | 4.5 V | –                        | 7    | 15  | –                                        | 15  | –                                         | 110 | ns   |

**Operating Characteristics** (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)


| Parameter |                               | Test Conditions                                  | $V_{CC} = 5\text{V}$ | Unit |
|-----------|-------------------------------|--------------------------------------------------|----------------------|------|
|           |                               |                                                  | TYP                  |      |
| $C_{pd}$  | Power Dissipation Capacitance | $f = 1\text{ MHz}$ all outputs switching-no load | 21                   | pF   |

**Parameter Measurement Information**


From Output Under Test



| $V_{CC}$ | Inputs |           | $V_M$      | $C_L$                         |
|----------|--------|-----------|------------|-------------------------------|
|          | $V_I$  | $t_r/t_f$ |            |                               |
| 4.5V     | 3 V    | 6ns       | $V_{CC}/2$ | 50pF                          |
| 5.0V     | 3 V    | 6ns       | $V_{CC}/2$ | 15pF used for 5V typical test |

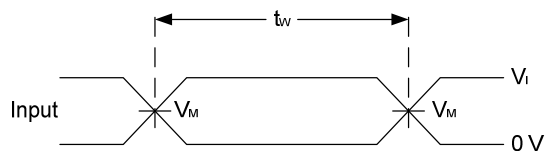

**Voltage Waveform Pulse Duration**

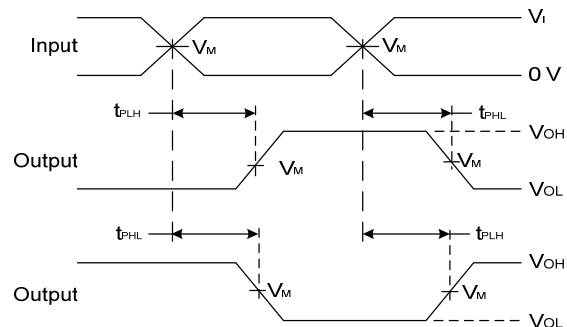


**Voltage Waveform Propagation Delay Times Inverting and Non Inverting Outputs**

- Notes: A . Includes test lead and test apparatus capacitance.
- B. All pulses are supplied at pulse repetition rate  $\leq 10\text{ MHz}$
- C. Inputs are measured separately one transition per measurement
- D.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$

**Figure 1. Load Circuit and Voltage Waveforms**

## Ordering Information

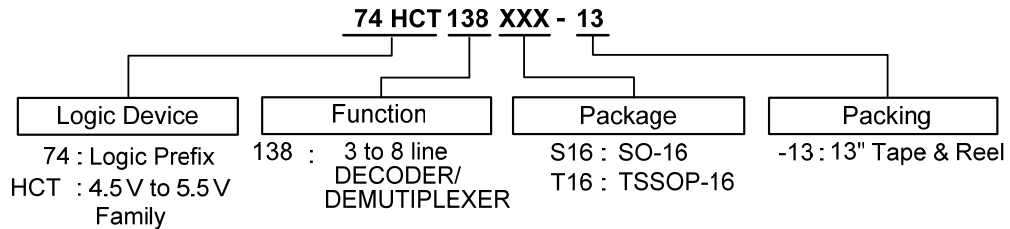


| Device         | Package Code | Packaging (Note 6) | 7" Tape and Reel (Note 7) |                    |
|----------------|--------------|--------------------|---------------------------|--------------------|
|                |              |                    | Quantity                  | Part Number Suffix |
| 74HCT138S16-13 | S16          | SO-16              | 2500/Tape & Reel          | -13                |
| 74HCT138T16-13 | T16          | TSSOP-16           | 2500/Tape & Reel          | -13                |

- Notes:
- 6. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
  - 7. The taping orientation is located on our website at <http://www.diodes.com/datasheets/ap02007.pdf>

## Marking Information

### (1) SO-16, TSSOP-16

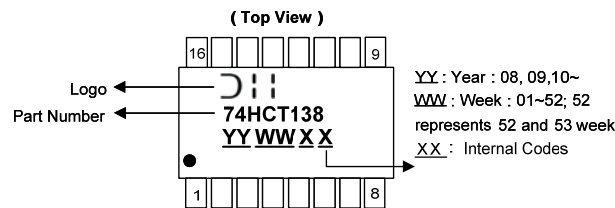


| Part Number | Package  |
|-------------|----------|
| 74HCT138S16 | SO-16    |
| 74HCT138T16 | TSSOP-16 |

**Package Outline Dimensions** (All dimensions in mm.)


Please see AP02002 at <http://www.diodes.com/datasheets/ap02002.pdf> for latest version.

**Package Type: SO-16**

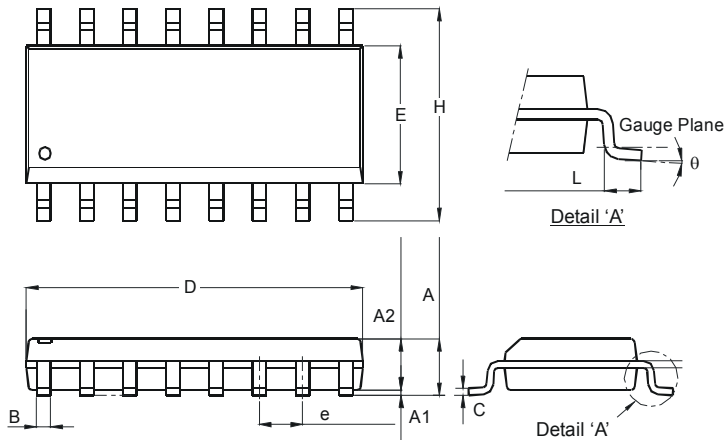

| SO-16                       |          |       |
|-----------------------------|----------|-------|
| Dim                         | Min      | Max   |
| A                           | 1.40     | 1.75  |
| A1                          | 0.10     | 0.25  |
| A2                          | 1.30     | 1.50  |
| B                           | 0.33     | 0.51  |
| C                           | 0.19     | 0.25  |
| D                           | 9.80     | 10.00 |
| E                           | 3.80     | 4.00  |
| e                           | 1.27 Typ |       |
| H                           | 5.80     | 6.20  |
| L                           | 0.38     | 1.27  |
| θ                           | 0°       | 8°    |
| <b>All Dimensions in mm</b> |          |       |

**Package Type: TSSOP-16**

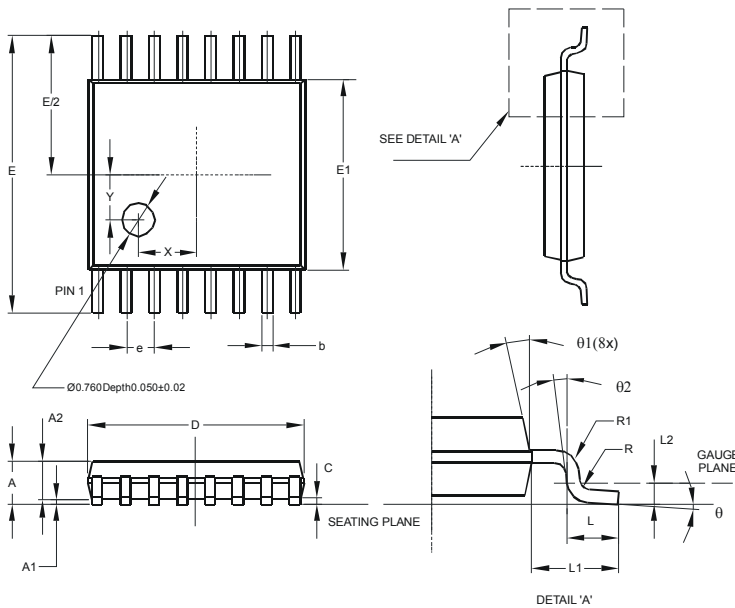


| TSSOP-16                    |          |      |       |
|-----------------------------|----------|------|-------|
| Dim                         | Min      | Max  | Typ   |
| A                           | -        | 1.08 | -     |
| A1                          | 0.05     | 0.15 | -     |
| A2                          | 0.80     | 0.93 | -     |
| b                           | 0.19     | 0.30 | -     |
| c                           | 0.09     | 0.20 | -     |
| D                           | 4.90     | 5.10 | -     |
| E                           | 6.40 BSC |      |       |
| E1                          | 4.30     | 4.50 | -     |
| e                           | 0.65 BSC |      |       |
| L                           | 0.45     | 0.75 | -     |
| L1                          | 1.00 REF |      |       |
| L2                          | 0.25 BSC |      |       |
| R                           | 0.09     | -    | -     |
| R1                          | 0.09     | -    | -     |
| X                           | -        | -    | 1.350 |
| Y                           | -        | -    | 1.050 |
| θ                           | 0°       | 8°   | -     |
| θ1                          | 5°       | 15°  | -     |
| θ2                          | 0°       | -    | -     |
| <b>All Dimensions in mm</b> |          |      |       |



## Suggested Pad Layout


Please see AP02001 at <http://www.diodes.com/datasheets/ap02001.pdf> for the latest version.

### Package Type: SO-16

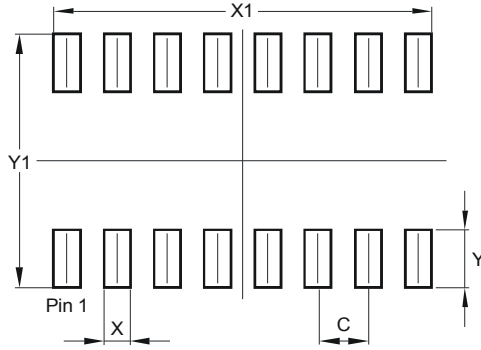

| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 1.270         |
| X          | 0.670         |
| X1         | 9.560         |
| Y          | 1.450         |
| Y1         | 6.400         |

### Package Type: TSSOP-16

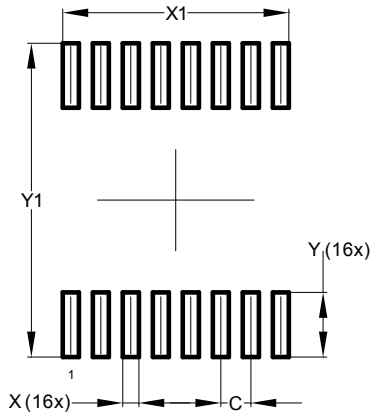

| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 0.650         |
| X          | 0.350         |
| X1         | 4.900         |
| Y          | 1.400         |
| Y1         | 6.800         |

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2013, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)