preliminary

Sonic Fast Recovery Diode

V_{RRM}	=	600 V
I_{FAV}	=	30 A
t_{rr}	=	35 ns

High Performance Fast Recovery Diode
Low Loss and Soft Recovery
Single Diode

Part number

DHG30IM600PC

Marking on Product: DHG30IM600PC



Backside: cathode



Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low Irm-values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low Irm reduces:
  - Power dissipation within the diode
  - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package: TO-263 (D2Pak)

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

© 2019 IXYS all rights reserved

Fast Diode

Symbol	Definition	Conditions		Ratings min.	typ.	max.	Unit
V_{RSM}	*max. non-repetitive reverse blocking voltage*		T_{VJ} = 25°C			600	V
V_{RRM}	*max. repetitive reverse blocking voltage*		T_{VJ} = 25°C			600	V
I_R	*reverse current, drain current*	V_R = 600 V	T_{VJ} = 25°C			50	µA
		V_R = 600 V	T_{VJ} = 125°C			4	mA
V_F	*forward voltage drop*	I_F = 30 A	T_{VJ} = 25°C			2.26	V
		I_F = 60 A				3.11	V
		I_F = 30 A	T_{VJ} = 125°C			2.22	V
		I_F = 60 A				3.20	V
I_{FAV}	*average forward current*	T_C = 95°C	T_{VJ} = 150°C			30	A
		rectangular d = 0.5					
V_{F0}	*threshold voltage* } *for power loss calculation only*		T_{VJ} = 150°C			1.17	V
r_F	*slope resistance* }					32	mΩ
R_{thJC}	*thermal resistance junction to case*					0.6	K/W
R_{thCH}	*thermal resistance case to heatsink*				0.25		K/W
P_{tot}	*total power dissipation*		T_C = 25°C			210	W
I_{FSM}	*max. forward surge current*	t = 10 ms; (50 Hz), sine; V_R = 0 V	T_{VJ} = 45°C			200	A
C_J	*junction capacitance*	V_R = 400 V f = 1 MHz	T_{VJ} = 25°C		16		pF
I_{RM}	*max. reverse recovery current*		T_{VJ} = 25 °C		12		A
		I_F = 35 A; V_R = 400 V	T_{VJ} = °C		tbd		A
t_{rr}	*reverse recovery time*	$-di_F/dt$ = 600 A/µs	T_{VJ} = 25 °C		35		ns
			T_{VJ} = °C		tbd		ns

© 2019 IXYS all rights reserved

Package TO-263 (D2Pak)			**Ratings**			
Symbol	**Definition**	**Conditions**	**min.**	**typ.**	**max.**	**Unit**
I_{RMS}	*RMS current*	per terminal 1)			35	A
T_{VJ}	*virtual junction temperature*		-55		150	°C
T_{op}	*operation temperature*		-55		125	°C
T_{stg}	*storage temperature*		-55		150	°C
Weight				2		g
F_C	*mounting force with clip*		20		60	N

1) I
M

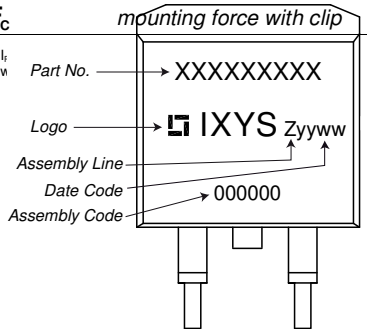

of the chip (2). In case of (1) and a pc
connecting the pins as one contact.

Part description

D = Diode
H = Sonic Fast Recovery Diode
G = extreme fast
30 = Current Rating [A]
IM = Single Diode
600 = Reverse Voltage [V]
PC = TO-263AB (D2Pak) (2)

Ordering	**Ordering Number**	**Marking on Product**	**Delivery Mode**	**Quantity**	**Code No.**
Standard	DHG30IM600PC-TRL	DHG30IM600PC	Tape & Reel	800	503501
Alternative	DHG30IM600PC-TUB	DHG30IM600PC	Tube	50	525078

Similar Part	**Package**	**Voltage class**
DHG30I600PA	TO-220AC (2)	600
DHG30I600HA	TO-247AD (2)	600

Equivalent Circuits for Simulation

** on die level* T_{VJ} = 150 °C



		Fast Diode	
$V_{0\,max}$	*threshold voltage*	1.17	V
$R_{0\,max}$	*slope resistance **	29	mΩ

© 2019 IXYS all rights reserved

Outlines TO-263 (D2Pak)

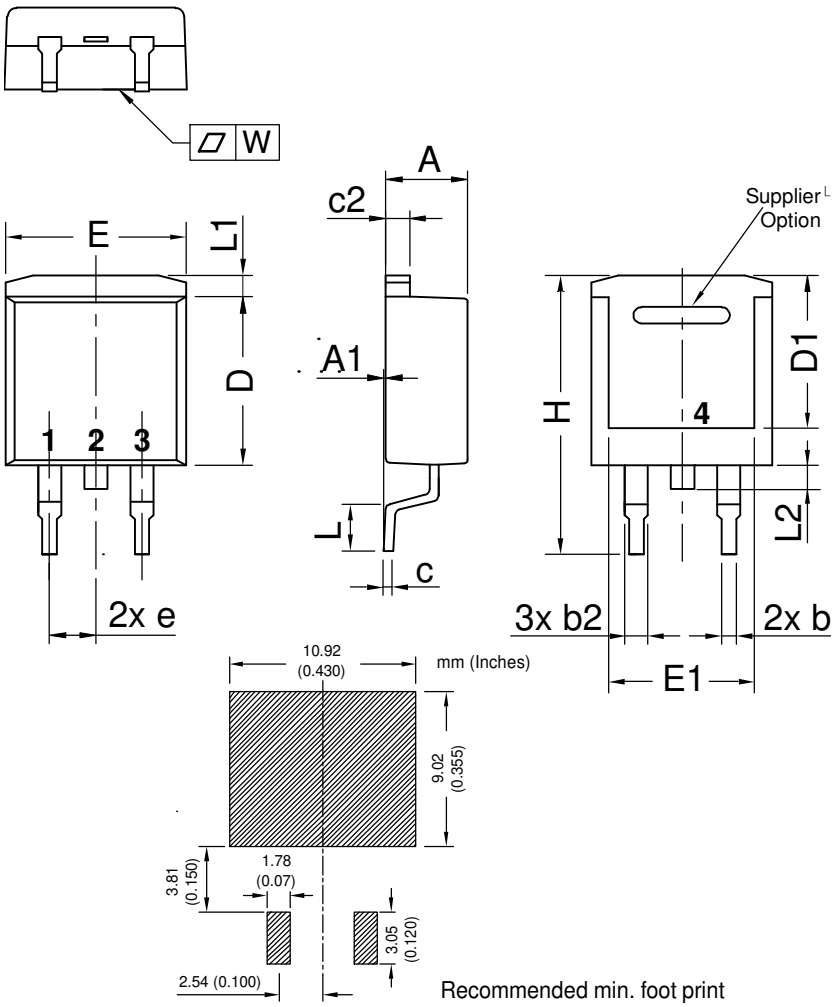

Recommended min. foot print

Dim.	Millimeter		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
A2	2.41		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2,54 BSC		0,100 BSC	
e1	4.28		0.169	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
W	typ. 0.02	0.040	typ. 0.0008	0.002

All dimensions conform with and/or within JEDEC standard.



© 2019 IXYS all rights reserved

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru