



MAC228A




Description

Designed primarily for industrial and consumer applications for full-wave control of AC loads such as appliance controls, heater controls, motor controls, and other power switching applications.


Features

- Sensitive Gate Triggering in 3 Modes for AC Triggering on Sinking Current Sources
- Four Mode Triggering for Drive Circuits that Source Current
- All Diffused and Glass-Passivated Junctions for Parameter Uniformity and Stability
- Small, Rugged, Thermowatt Construction for Low Thermal Resistance and High Heat Dissipation
- Center Gate Geometry for Uniform Current Spreading
- These Devices are Pb-Free and are RoHS Compliant

Pin Out

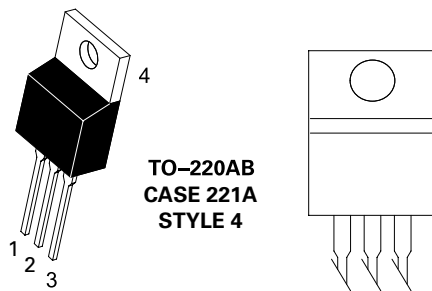

Functional Diagram

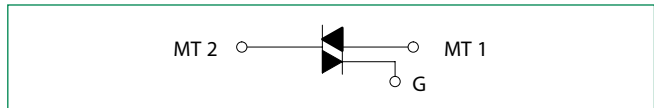

Additional Information



Datasheet



Resources



Samples

Maximum Ratings ($T_J = 25^\circ\text{C}$ unless otherwise noted)

| Rating | Symbol | Value | Unit |
|--|--------------------------------------|--------------------------|--------------------|
| Peak Repetitive Off-State Voltage (Note 1) (– 40 to 110°C, Sine Wave, 50 to 60 Hz, Gate Open) | V_{DRM} V_{RRM} | 200 400 600 800 | V |
| On-State RMS Current ($T_C = 80^\circ\text{C}$) Full Cycle Sine Wave, 50 to 60 Hz | $I_{\text{T (RMS)}}$ | 8.0 | A |
| Peak Non-Repetitive Surge Current (One Full Cycle Sine Wave, 60 Hz, $T_J = 110^\circ\text{C}$) | I_{TSM} | 80 | A |
| Circuit Fusing Consideration ($t = 8.3$ ms) | I^2t | 26 | A ² sec |
| Peak Gate Current, ($t \leq 2$ s, $T_C = 80^\circ\text{C}$) | I_{GM} | ± 2.0 | A |
| Peak Gate Voltage, ($t \leq 2$ s, $T_C = 80^\circ\text{C}$) | V_{GM} | ± 10 | V |
| Peak Gate Power ($t \leq 2$ μs , $T_C = 80^\circ\text{C}$) | P_{GM} | 20 | W |
| Average Gate Power ($t \leq 8.3$ ms, $T_C = 80^\circ\text{C}$) | $P_{\text{G (AV)}}$ | 0.5 | W |
| Operating Junction Temperature Range | T_J | -40 to +125 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -40 to +150 | $^\circ\text{C}$ |
| Mounting Torque | – | 8.0 | in lb |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

1. V_{DRM} and V_{RRM} for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

Thermal Characteristics

| Rating | Symbol | Value | Unit |
|--|--|-------------|--------------------|
| Thermal Resistance, Junction-to-Case (AC) Junction-to-Ambient | $R_{\theta\text{JC}}$ $R_{\theta\text{JA}}$ | 2.0 62.5 | $^\circ\text{C/W}$ |
| Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds | T_L | 260 | $^\circ\text{C}$ |

Electrical Characteristics - OFF ($T_J = 25^\circ\text{C}$ unless otherwise noted ; Electricals apply in both directions)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|--------------------------------------|-----|-----|-----|------|
| Peak Repetitive Blocking Current ($V_D = V_{\text{DRM}} = V_{\text{RRM}}$, Gate Open) | I_{DRM} I_{RRM} | - | - | 1.0 | mA |
| | | - | - | 2.0 | |

Electrical Characteristics - ON ($T_J = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

| Characteristic | Symbol | Min | Typ | Max | Unit | |
|---|-----------------|--------------|-----|-----|---------------|----|
| Peak On-State Voltage ($I_{\text{TM}} = \pm 11$ A Peak, Pulse Width ≤ 2 ms, Duty Cycle $\leq 2\%$) | V_{TM} | – | – | 1.8 | V | |
| Gate Trigger Current (Continuous dc) ($V_D = 12$ V, $R_L = 100$ Ohms) | I_{GT} | MT2(+), G(+) | – | – | 5.0 | mA |
| | | MT2(+), G(–) | – | – | 5.0 | |
| | | MT2(–), G(–) | – | – | 5.0 | |
| | | MT2(–), G(+) | – | – | 10 | |
| Gate Trigger Voltage (Continuous dc) ($V_D = 12$ V, $R_L = 100$ Ω) | V_{GT} | MT2(+), G(+) | – | – | 2.0 | V |
| | | MT2(+), G(–) | – | – | 2.0 | |
| | | MT2(–), G(–) | – | – | 2.0 | |
| | | MT2(–), G(+) | – | – | 2.5 | |
| Gate Non-Trigger Voltage (Continuous DC), ($V_D = 12$ V, $T_C = 110^\circ\text{C}$, $R_L = 100$ Ω) All Four Quadrants | V_{GD} | 0.2 | – | – | V | |
| Holding Current ($V_D = 12$ V _{dc} , Gate Open, Initiating Current = ± 200 mA) | I_{H} | – | – | 15 | mA | |
| Gate-Controlled Turn-On Time, ($V_D = \text{Rated } V_{\text{DRM}}$, $I_{\text{TM}} = 16$ A Peak, $I_G = 30$ mA) | t_{gt} | – | 1.5 | – | μs | |


Dynamic Characteristics

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|-------------|-----|-----|-----|------------------|
| Critical Rate of Rise of Commutation Voltage ($V_D = \text{Rated } V_{DRM}$, $I_{TM} = 11.3 \text{ A}$, Commutating $di/dt = 4.1 \text{ A/ms}$, Gate Unenergized, $T_C = 80^\circ\text{C}$) | $(di/dt)_c$ | - | 5.0 | - | A/ms |
| Critical Rate of Rise of Off-State Voltage ($V_D = \text{Rated } V_{DRM}$, Exponential Waveform, Gate Open, $T_C = 110^\circ\text{C}$) | dv/dt | - | 25 | - | V/ μs |


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Voltage Current Characteristic of SCR

| Symbol | Parameter |
|-----------|---|
| V_{DRM} | Peak Repetitive Forward Off State Voltage |
| I_{DRM} | Peak Forward Blocking Current |
| V_{RRM} | Peak Repetitive Reverse Off State Voltage |
| I_{RRM} | Peak Reverse Blocking Current |
| V_{TM} | Maximum On State Voltage |
| I_H | Holding Current |

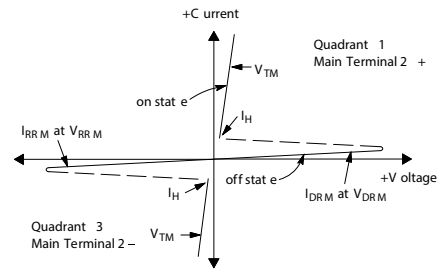

Quadrant Definitions for a Triac

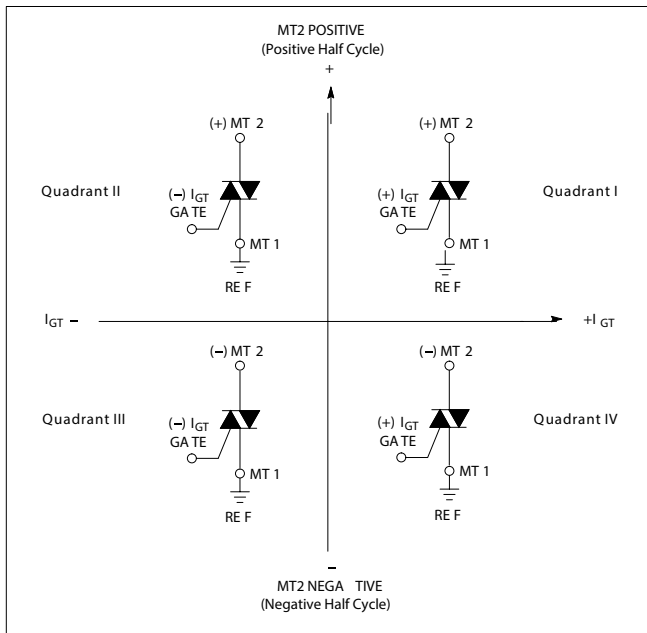

All polarities are referenced to MT1.
With in-phase signals (using standard AC lines) quadrants I and III are used

Figure 1. Current Derating



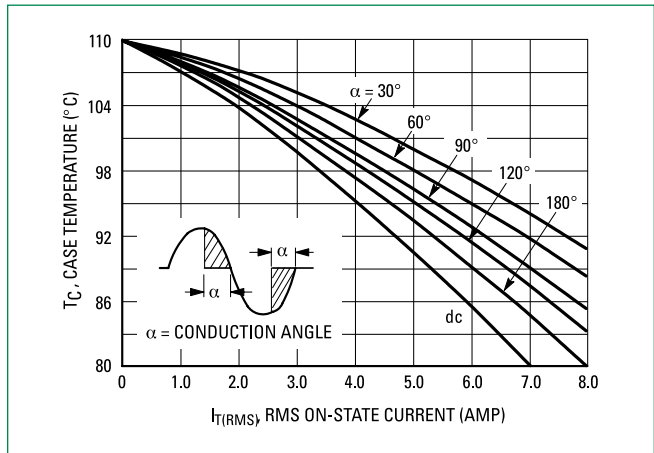



Figure 2. On-State Power Dissipation

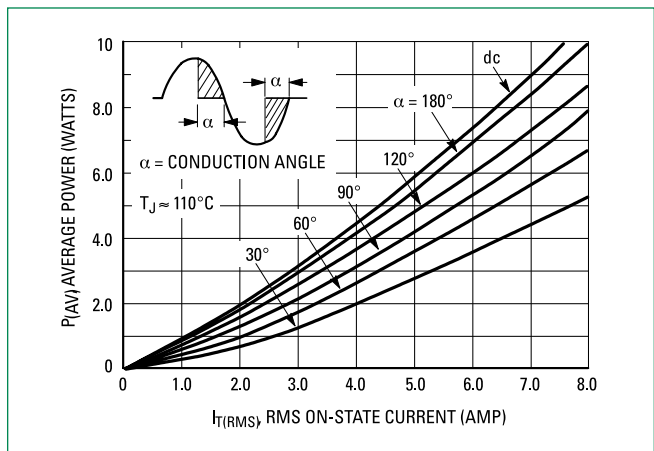

Dimensions

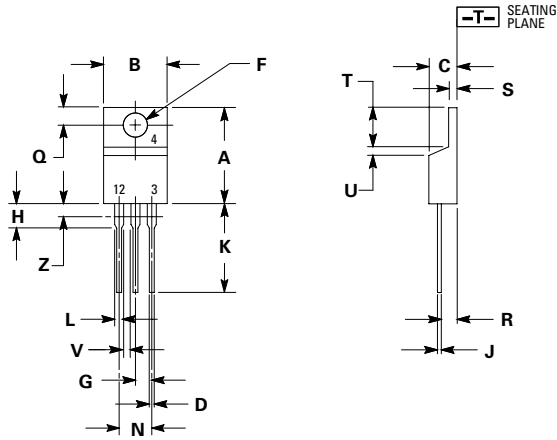

Part Marking System

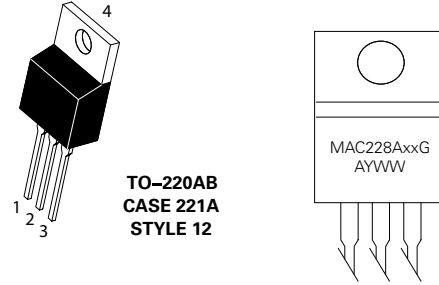

xx = 4, 6, 8, or 10
 A= Assembly Location (Optional)*
 Y= Year
 WW = Work Week
 G = Pb-Free Package

| Dim | Inches | | Millimeters | |
|-----|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.590 | 0.620 | 14.99 | 15.75 |
| B | 0.380 | 0.420 | 9.65 | 10.67 |
| C | 0.178 | 0.188 | 4.52 | 4.78 |
| D | 0.025 | 0.035 | 0.64 | 0.89 |
| F | 0.142 | 0.147 | 3.61 | 3.73 |
| G | 0.095 | 0.105 | 2.41 | 2.67 |
| H | 0.110 | 0.130 | 2.79 | 3.30 |
| J | 0.018 | 0.024 | 0.46 | 0.61 |
| K | 0.540 | 0.575 | 13.72 | 14.61 |
| L | 0.060 | 0.075 | 1.52 | 1.91 |
| N | 0.195 | 0.205 | 4.95 | 5.21 |
| Q | 0.105 | 0.115 | 2.67 | 2.92 |
| R | 0.085 | 0.095 | 2.16 | 2.41 |
| S | 0.045 | 0.060 | 1.14 | 1.52 |
| T | 0.235 | 0.255 | 5.97 | 6.47 |
| U | 0.000 | 0.050 | 0.00 | 1.27 |
| V | 0.045 | — | 1.15 | — |
| Z | — | 0.080 | — | 2.04 |

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

| Pin Assignment | |
|----------------|-----------------|
| 1 | Main Terminal 1 |
| 2 | Main Terminal 2 |
| 3 | Gate |
| 4 | No Connection |

Ordering Information

| Device | Package | Shipping |
|------------|-----------------------|----------------|
| MAC228A4G | TO-220AB (Pb-Free) | 500 Units/ Box |
| MAC228A6G | | 500 Units/ Box |
| MAC228A6TG | | 500 Units/ Box |
| MAC228A8G | | 500 Units/ Box |
| MAC228A8TG | | 500 Units/ Box |
| MAC228A10G | | 500 Units/ Box |

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru