

## Main

|                           |                  |
|---------------------------|------------------|
| Range                     | TeSys            |
| Product name              | TeSys GV2        |
| Device short name         | GV2ME            |
| Product or component type | Circuit breaker  |
| Device application        | Motor            |
| Trip unit technology      | Thermal-magnetic |

## Complementary

|                                                     |                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Poles description                                   | 3P                                                                                                                                                                                                                                                                                                                  |
| Network type                                        | AC                                                                                                                                                                                                                                                                                                                  |
| Utilisation category                                | AC-3 conforming to IEC 60947-4-1<br>Category A conforming to IEC 60947-2                                                                                                                                                                                                                                            |
| Network frequency                                   | 50/60 Hz conforming to IEC 60947-4-1                                                                                                                                                                                                                                                                                |
| Fixing mode                                         | Clipped on 35 mm symmetrical DIN rail<br>Screwed on panel (with adaptor plate)                                                                                                                                                                                                                                      |
| Operating position                                  | Any position                                                                                                                                                                                                                                                                                                        |
| Motor power kW                                      | 3 kW at 690 V AC 50/60 Hz<br>1.1 kW at 400/415 V AC 50/60 Hz<br>1.5 kW at 400/415 V AC 50/60 Hz<br>1.5 kW at 500 V AC 50/60 Hz<br>2.2 kW at 500 V AC 50/60 Hz<br>2.2 kW at 690 V AC 50/60 Hz                                                                                                                        |
| Breaking capacity                                   | 3 kA Icu at 690 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 500 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 230/240 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 400/415 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Ics] rated service short-circuit breaking capacity | 100 % at 230/240 V AC 50/60 Hz conforming to IEC 60947-2<br>100 % at 440 V AC 50/60 Hz conforming to IEC 60947-2<br>100 % at 500 V AC 50/60 Hz conforming to IEC 60947-2<br>75 % at 690 V AC 50/60 Hz conforming to IEC 60947-2<br>100 % at 400/415 V AC 50/60 Hz conforming to IEC 60947-2                         |
| Control type                                        | Push-button                                                                                                                                                                                                                                                                                                         |
| [In] rated current                                  | 4 A                                                                                                                                                                                                                                                                                                                 |
| Trip unit rating                                    | 2.5...4 A                                                                                                                                                                                                                                                                                                           |
| Magnetic tripping current                           | 51 A                                                                                                                                                                                                                                                                                                                |
| System Voltage                                      | 690 V AC 50/60 Hz conforming to IEC 60947-2                                                                                                                                                                                                                                                                         |
| [Ui] rated insulation voltage                       | 690 V AC 50/60 Hz conforming to IEC 60947-2                                                                                                                                                                                                                                                                         |
| [Ith] conventional free air thermal current         | 4 A conforming to IEC 60947-4-1                                                                                                                                                                                                                                                                                     |
| [Uimp] rated impulse withstand voltage              | 6 kV conforming to IEC 60947-2                                                                                                                                                                                                                                                                                      |
| Power dissipation per pole                          | 2.5 W                                                                                                                                                                                                                                                                                                               |
| Mechanical durability                               | 100000 cycles                                                                                                                                                                                                                                                                                                       |
| Electrical durability                               | 100000 cycles AC-3 at 440 V                                                                                                                                                                                                                                                                                         |
| Operating rate                                      | 25 cyc/h                                                                                                                                                                                                                                                                                                            |
| Rated duty                                          | Continuous conforming to IEC 60947-4-1                                                                                                                                                                                                                                                                              |
| Connections - terminals                             | Screw clamp terminals 2 cable(s) 1...6 mm <sup>2</sup> solid<br>Screw clamp terminals 2 cable(s) 1.5...6 mm <sup>2</sup> flexible without cable end<br>Screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible with cable end                                                                               |
| Tightening torque                                   | 1.7 N.m on screw clamp terminals                                                                                                                                                                                                                                                                                    |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                           |                                 |
|---------------------------|---------------------------------|
| Suitability for isolation | Yes conforming to IEC 60947-1   |
| Phase failure sensitivity | Yes conforming to IEC 60947-4-1 |
| Height                    | 3.5 in (89 mm)                  |
| Width                     | 1.77 in (45 mm)                 |
| Depth                     | 3.08 in (78.2 mm)               |
| Product weight            | 0.57 lb(US) (0.26 kg)           |

## Environment

|                                       |                                                                                                                                                     |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| standards                             | EN 60204<br>IEC 60947-1<br>IEC 60947-2<br>IEC 60947-4-1<br>NF C 63-120<br>NF C 63-650<br>NF C 79-130<br>UL 508<br>VDE 0113<br>VDE 0660<br>CSA C22.2 |
| product certifications                | ATEX<br>BV<br>CCC<br>CEBEC<br>CSA<br>DNV<br>EZU<br>GL<br>LROS (Lloyds register of shipping)<br>RINA<br>SETI<br>TSE<br>UL<br>EAC                     |
| protective treatment                  | TH                                                                                                                                                  |
| IP degree of protection               | IP20 conforming to IEC 60529                                                                                                                        |
| IK degree of protection               | IK04                                                                                                                                                |
| ambient air temperature for operation | -4...140 °F (-20...60 °C)                                                                                                                           |
| ambient air temperature for storage   | -40...176 °F (-40...80 °C)                                                                                                                          |
| fire resistance                       | 1760 °F (960 °C) conforming to IEC 60695-2-1                                                                                                        |
| operating altitude                    | 6561.68 ft (2000 m)                                                                                                                                 |

## Offer Sustainability


|                                                                                                |                                                                                                |
|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| Green Premium product                                                                          | Green Premium product                                                                          |
| Compliant - since 0631 - Schneider Electric declaration of conformity                          | Compliant - since 0631 - Schneider Electric declaration of conformity                          |
| Reference contains SVHC above the threshold - go to CaP for more details                       | Reference contains SVHC above the threshold                                                    |
| Available                                                                                      | Available                                                                                      |
| Need no specific recycling operations                                                          | Need no specific recycling operations                                                          |
| WARNING: This product can expose you to chemicals including:                                   | WARNING: This product can expose you to chemicals including:                                   |
| Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. | Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>  | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>  |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

## Thermal-Magnetic Tripping Curves for GV2ME and GV2P

Average Operating Times at 20 °C Related to Multiples of the Setting Current

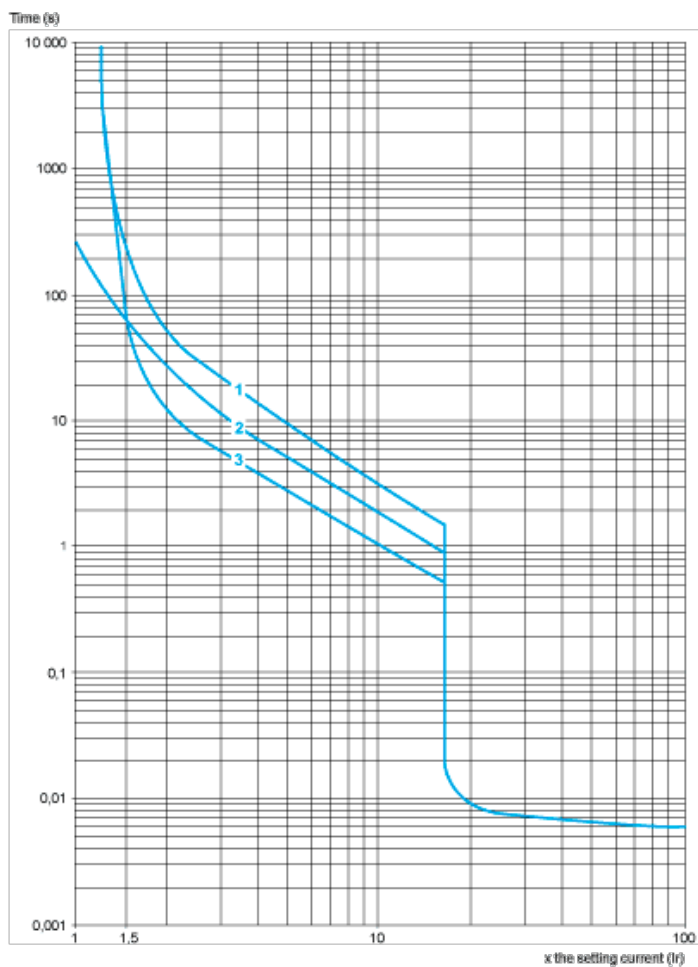


- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

#### Current Limitation on Short-Circuit for GV2ME and GV2P (3-Phase 400/415 V)

##### Dynamic Stress

$I_{peak} = f(\text{prospective } I_{sc}) \text{ at } 1.05 U_e = 435 \text{ V}$

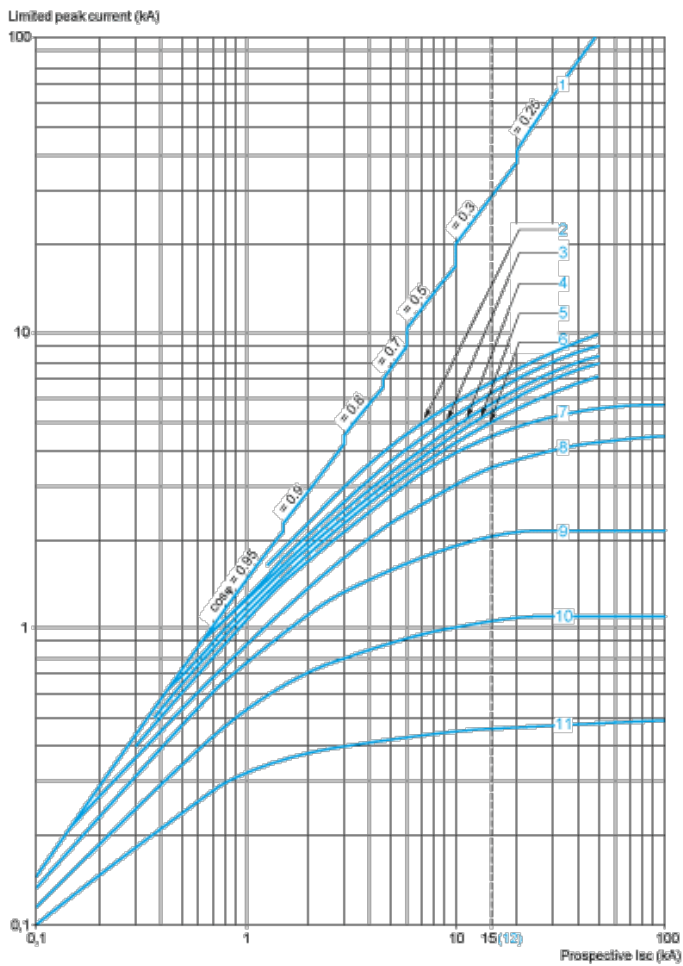


- 1 Maximum peak current
- 2 24-32 A
- 3 20-25 A
- 4 17-23 A
- 5 13-18 A
- 6 9-14 A
- 7 6-10 A
- 8 4-6.3 A
- 9 2.5-4 A
- 10 1.6-2.5 A
- 11 1-1.6 A
- 12 Limit of rated ultimate breaking capacity on short-circuit of GV2ME (14, 18, 23, and 25 A ratings).

#### Thermal Limit on Short-Circuit for GV2ME

#### Thermal Limit in kA<sup>2</sup>s in the Magnetic Operating Zone


Sum of  $I^2dt = f$  (prospective Isc) at 1.05 Ue = 435 V

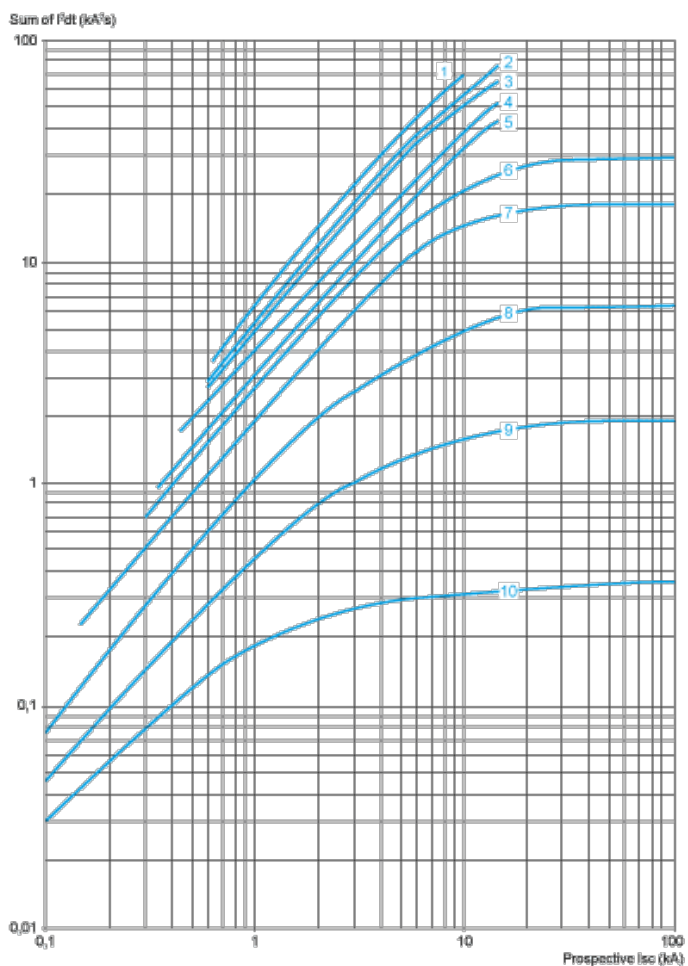

- 1 24-32 A
- 2 20-25 A
- 3 17-23 A
- 4 13-18 A
- 5 9-14 A
- 6 6-10 A
- 7 4-6.3 A
- 8 2.5-4 A
- 9 1.6-2.5 A
- 10 1-1.6 A

#### Dimension

##### GV2ME



(1) Maximum


X1 Electrical clearance = 40 mm for  $U_e \leq 690$  V

|          | b   |
|----------|-----|
| GV2ME..  | 89  |
| GV2ME..3 | 101 |


#### Mounting

**GV2ME**


On 35 mm rail




c = 78.5 on AM1 DP200 (35 x 7.5)  
c = 86 on AM1 DE200, ED200 (35 x 15)  
On panel with adapter plate GV2AF02



On pre-slotted plate AM1 PA  
AF1 EA4




On rails DZ5 MB201




**GV2AF01**

Combination GV2ME + TeSys k contactor



**GV2AF3**


Combination GV2ME + TeSys d contactor



| GV2ME + | LC1D09...D18 | LC1D25 and D32 |
|---------|--------------|----------------|
| b       | 176.4        | 186.8          |
| c1      | 94.1         | 100.4          |
| c       | 99.6         | 105.9          |


**GV2AF4 + LAD311**

Combination GV2ME + TeSys d contactor

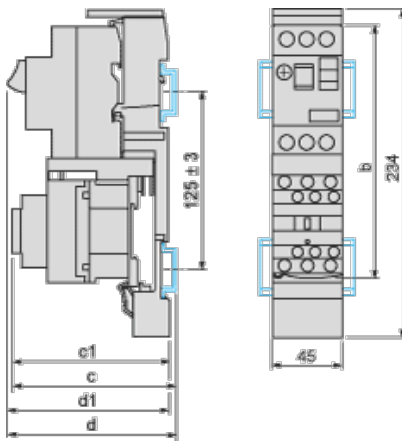


| GV2ME + | LC1D09...D18 | LC1D25 and D32 |
|---------|--------------|----------------|
| b       | 176.4        | 186.8          |
| c1      | 103.1        | 136.4          |
| c       | 135.6        | 141.9          |
| d1      | 107          | 107            |
| d       | 112.5        | 112.5          |

#### GV2ME + GV1L3 (Current Limiter)

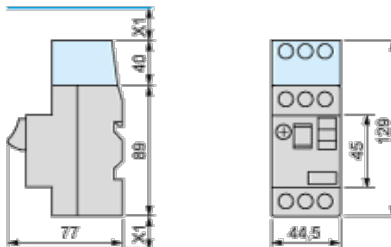


X1 = 10 mm for  $U_e = 230\text{ V}$  or 30 mm for  $230\text{ V} < U_e \leq 690\text{ V}$

#### GV2ME•• and GV2RT



#### Connection of Undervoltage Trip for Dangerous Machines (Conforming to INRS) on GV2ME Only

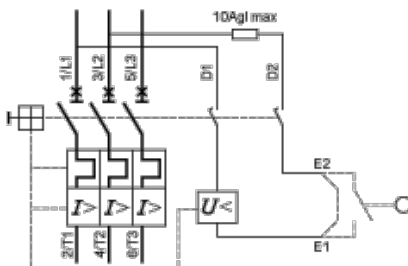

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)