


# Water Insoluble Nitride Thin Film Precision Chip Resistors

## WIN Series

- TaN thin film technology
- Inherent moisture protection superior to that of passivated nichrome chip resistors
- High stability in humid and polluted environments
- Typical 85°C, 85%RH biased humidity 2000 hour stability <0.1%
- Typical moisture resistance stability  $\pm 100$ ppm
- Precision  $\pm 0.05\%$  tolerance and  $\pm 10$ ppm/°C
- Anti-sulfur terminations
- 100% screened by automated optical inspection

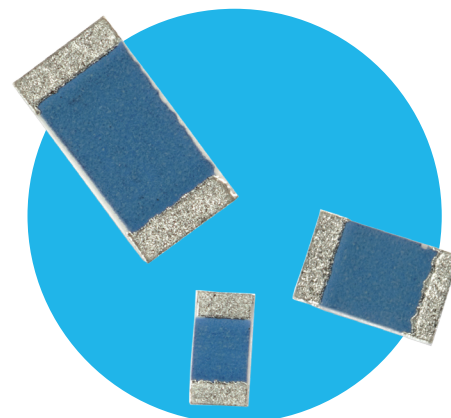


All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

## Electrical Data

|                                            |            | T0402          | T0603              | T0805      | T1206     |
|--------------------------------------------|------------|----------------|--------------------|------------|-----------|
| Power rating @ 70°C                        | watts      | 0.05           | 0.1                | 0.25       | 0.33      |
| Resistance range                           | ohms       | 7R5 to 30K     | 5R to 100K         | 5R to 267K | 5R to 1M0 |
| Limiting element voltage (maximum voltage) | Vdc or rms | 75             | 75                 | 100        | 200       |
| Resistance tolerance                       | %          | ±0.1 ±0.5 ±1   | ±0.05 ±0.1 ±0.5 ±1 |            |           |
| TCR                                        | ppm/°C     | ±50 ±25        | ±10 ±15 ±25 ±50    |            |           |
| Standard values                            |            | E24, E96, E192 |                    |            |           |
| Ambient temperature range                  | °C         | -65 to +150    |                    |            |           |

## Physical Data

| Dimensions in mm & (inch) and weight in mg |                                        |                                        |                                        |                                        |                 |                                        |         |
|--------------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|-----------------|----------------------------------------|---------|
|                                            | L                                      | W                                      | T                                      | C                                      | B min           | A                                      | Wt. nom |
| T0402                                      | 1.02 $\pm$ 0.05<br>(0.04 $\pm$ 0.002)  | 0.53 $\pm$ 0.05<br>(0.021 $\pm$ 0.002) | 0.3 $\pm$ 0.08<br>(0.012 $\pm$ 0.003)  | 0.2 $\pm$ 0.05<br>(0.008 $\pm$ 0.002)  | 0.44<br>(0.017) | 0.25 $\pm$ 0.05<br>(0.01 $\pm$ 0.002)  | 0.9     |
| T0603                                      | 1.58 $\pm$ 0.15<br>(0.062 $\pm$ 0.006) | 0.80 $\pm$ 0.10<br>(0.031 $\pm$ 0.004) | 0.45 $\pm$ 0.10<br>(0.018 $\pm$ 0.004) | 0.27 $\pm$ 0.20<br>(0.011 $\pm$ 0.008) | 0.82<br>(0.032) | 0.34 $\pm$ 0.20<br>(0.013 $\pm$ 0.008) | 2.0     |
| T0805                                      | 2.02 $\pm$ 0.15<br>(0.080 $\pm$ 0.006) | 1.28 $\pm$ 0.15<br>(0.050 $\pm$ 0.006) | 0.45 $\pm$ 0.10<br>(0.018 $\pm$ 0.004) | 0.31 $\pm$ 0.20<br>(0.012 $\pm$ 0.008) | 1.1<br>(0.043)  | 0.40 $\pm$ 0.20<br>(0.016 $\pm$ 0.008) | 4.3     |
| T1206                                      | 3.15 $\pm$ 0.15<br>(0.124 $\pm$ 0.006) | 1.57 $\pm$ 0.15<br>(0.062 $\pm$ 0.006) | 0.50 $\pm$ 0.15<br>(0.020 $\pm$ 0.006) | 0.45 $\pm$ 0.25<br>(0.018 $\pm$ 0.010) | 2.03<br>(0.08)  | 0.52 $\pm$ 0.25<br>(0.020 $\pm$ 0.010) | 9.6     |



## Construction

Conductors, thin film resistive element and epoxy outer protection are applied to an alumina substrate. The chips are supplied with wrap-around terminations suitable for soldering. The terminations have an electroplated nickel barrier and either 100% matt tin or 60/40 SnPb finish.

## Marking & Solvent Resistance

WIN resistors have no marking on the component body. The body protection is resistant to all normal cleaning solvents suitable for printed circuits

## Screening

WIN resistors can be screened to any tests identified in MIL-PRF-55342 and AEC-Q200 to provide components suitable as a COTS equivalent to MIL products or screened product subject to harsh operating environments.

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


## Manufacturing Capabilities Data

| TCR<br>ppm/°C | Tolerance % |           |           |            |           |            |         |
|---------------|-------------|-----------|-----------|------------|-----------|------------|---------|
|               | T0402       | T0603     |           | T0805      |           | T1206      |         |
|               | 0.1-1       | 0.05      | 0.1-1     | 0.05       | 0.1-1     | 0.05       | 0.1-1   |
| 10            |             | 5kΩ-10kΩ  |           | 5kΩ-40kΩ   |           | 5kΩ-80kΩ   |         |
| 15            |             | 100Ω-50kΩ |           | 100Ω-100kΩ |           | 100Ω-400kΩ |         |
| 25            | 10Ω-30kΩ    | 50Ω-50kΩ  | 10Ω-100kΩ | 50Ω-100kΩ  | 10Ω-267kΩ | 50Ω-400kΩ  | 10Ω-1MΩ |
| 50            | 7.5Ω-30kΩ   |           | 5Ω-100kΩ  |            | 5Ω-267kΩ  |            | 5Ω-1MΩ  |

## Performance Data


| Test                         | Method                                                                        | ΔR                            |                                 |
|------------------------------|-------------------------------------------------------------------------------|-------------------------------|---------------------------------|
|                              |                                                                               | MIL-PRF-55342<br>Limits (max) | WIN actual<br>performance (typ) |
| Thermal Shock                | MIL-PRF-55342 4.8.3 (MIL-STD-202 107G cond. F: 5 cycles in air, +150 / -65°C) | ± 0.1%                        | ± 0.01%                         |
| Thermal Shock - Extended     | MIL-STD-202 107G cond. F-3: 100 cycles in air, +150 / -65°C                   | ± 0.1%                        | ± 0.02%                         |
| Low Temp. Operation          | MIL-PRF-55342 4.8.5 (-65°C)                                                   | ± 0.1%                        | ± 0.02%                         |
| Short Time Overload          | MIL-PRF-55342 4.8.6 (lesser of 6.25 x Pr or 2 x LEV for 5 seconds)            | ± 0.1%                        | ± 0.02%                         |
| High Temp. Exposure          | MIL-PRF-55342 4.8.7 (+150°C for 100 hours)                                    | ± 0.1%                        | ± 0.02%                         |
| High Temp. Exposure Extended | +150°C for 1000 hours                                                         | N/A                           | ±0.1%                           |
| Resistance to Solder Heat    | MIL-PRF-55342 4.8.8                                                           | ± 0.2%                        | ± 0.02%                         |
| Moisture Resistance          | MIL-PRF-55342 4.8.9 (MIL-STD-202 106G: 10 cycles, 65±2°C, 95±5% RH)           | ± 0.2%                        | ± 0.01%                         |
| Load Life                    | MIL-PRF-55342 4.8.11 (MIL-STD-202 108A: Pr at 70°C for 2000 hours)            | ± 0.5%                        | ± 0.08%                         |
| Biased Damp Heat             | 85°C, 85%RH, 10% Pr bias, for 2000 hours                                      | N/A                           | ± 0.08%                         |
| Flower of Sulfur             | ASTM B-809 (modified) 105°C Dry, 1000 Hours                                   | Pass                          |                                 |

Temperature Derating

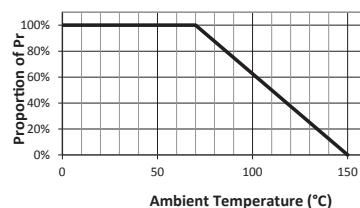


Load Life Stability

Typical Load Life per MIL-STD-202 108A

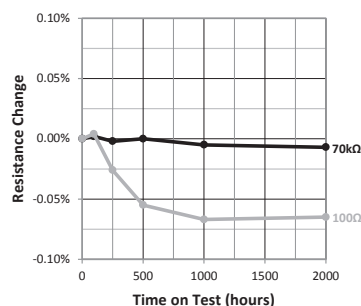

Biased Damp Heat Stability



Typical @ 85°C, 85%RH, 10% Pr bias



### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

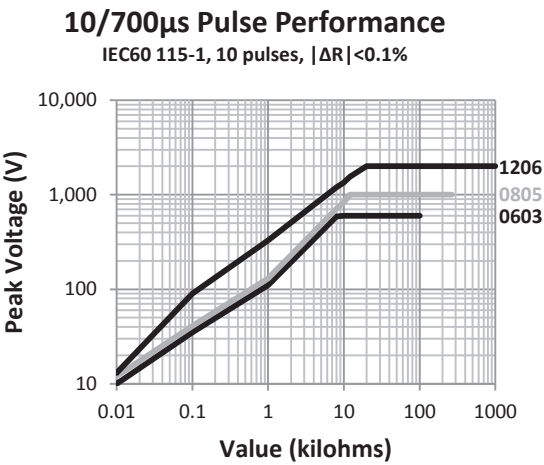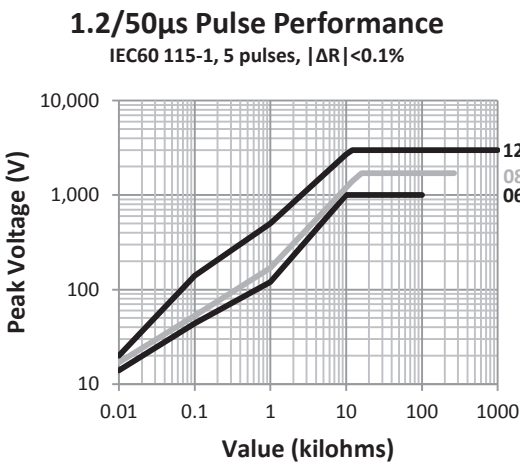

Pulse performance for 0402 to be advised.

Ordering Procedure

This product has two valid part numbers:  
European (Welwyn) Part Number: WINT1206LF031001B3 (1206, ±25ppm/°C, 1 kilohm ±0.1%, Pb-free)

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| W | I | N | T | 1 | 2 | 0 | 6 | L | F | 0 | 3 | 1 | 0 | 0 | 1 | B | 3 |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |   |   |   |   |   |   |   |   |   |   |   |

| 1      | 2     | 3            | 4              | 5                                                         | 6          | 7                    |
|--------|-------|--------------|----------------|-----------------------------------------------------------|------------|----------------------|
| Series | Type  | Termination  | TCR            | Value                                                     | Tolerance  | Packing              |
| WIN    | T0402 | PB = SnPb    | 12 = ±10ppm/°C | 3 digits + multiplier<br>R = ohms for<br>values <100 ohms | A = ±0.05% | Tape & reel          |
|        | T0603 | LF = Pb free | 11 = ±15ppm/°C |                                                           | B = ±0.1%  | 3 3000/reel Standard |
|        | T0805 |              | 03 = ±25ppm/°C |                                                           | D = ±0.5%  | Blank 1000/reel      |
|        | T1206 |              | 02 = ±50ppm/°C |                                                           | F = 1%     |                      |

USA (IRC) Part Number: WIN -T1206LF-03-1001-B3 (1206, ±25ppm/°C, 1 kilohm ±0.1%, Pb-free)

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| W | I | N | - | T | 1 | 2 | 0 | 6 | L | F | - | 0 | 3 | - | 1 | 0 | 0 | 1 | - | B | 3 |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

| 1      | 2     | 3            | 4              | 5                                                         | 6          | 7                    |
|--------|-------|--------------|----------------|-----------------------------------------------------------|------------|----------------------|
| Series | Type  | Termination  | TCR            | Value                                                     | Tolerance  | Packing              |
| WIN    | T0402 | PB = SnPb    | 12 = ±10ppm/°C | 3 digits + multiplier<br>R = ohms for<br>values <100 ohms | A = ±0.05% | Tape & reel          |
|        | T0603 | LF = Pb free | 11 = ±15ppm/°C |                                                           | B = ±0.1%  | 3 3000/reel Standard |
|        | T0805 |              | 03 = ±25ppm/°C |                                                           | D = ±0.5%  | Blank 1000/reel      |
|        | T1206 |              | 02 = ±50ppm/°C |                                                           | F = 1%     |                      |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)