



Main

Range of product	OsiSense XU
Series name	Application tertiary sector
Electronic sensor type	Photo-electric sensor
Product specific application	Buzzer signalling
Sensor name	XUJ
Sensor design	Compact
Material	Plastic
Detection system	Reflex
Emission	Infrared
[Sn] nominal sensing distance	19.69 ft (6 m) with reflector Ø 80 mm
Wiring technique	4-wire
Sale per indivisible quantity	1

Complementary

Enclosure material	PEI
Type of output signal	Discrete
Output type	Relay
Discrete output function	1 NO
Output function governance	Dark
Electrical connection	Screw-clamp terminals, maximum : 1 x 1.5 mm ²
Cable entry	1 entry for Pg 9 cable gland
Signalling function	Buzzer
Status LED	1 LED (yellow) output state
Supply circuit type	AC/DC
[Us] rated supply voltage	24...240 V AC 24...48 V DC
Supply voltage limits	20...264 V AC 20...60 V DC
Output voltage	<= 250 V AC <= 30 V DC
Switching capacity in mA	0.5 A (cos ϕ = 0.4 for 0.5 million cycles at 1 operating cycle per second at 250 V) 2 A (cos ϕ = 1 for 1 million cycles at 1 operating cycle per second)
Switching frequency	<= 20 Hz
Power consumption in W	<= 2 W
Time delay range	0.3...3 s
Delay first up	<= 60 ms
Delay response	<= 25 ms
Delay recovery	<= 25 ms
Electrical durability	500000 cycles, switching capacity: 500 mA, cos ϕ = 0.4, 60 cyc/mn at 250 V 1000000 cycles, switching capacity: 2000 mA, cos ϕ = 1, 60 cyc/mn at 250 V
Depth	2.72 in (69 mm)
Height	3.35 in (85 mm)
Width	1.1 in (28 mm)
Product weight	0.73 lb(US) (0.33 kg)

Environment

product certifications	CE
ambient air temperature for operation	-13...131 °F (-25...55 °C)
ambient air temperature for storage	-40...158 °F (-40...70 °C)

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

vibration resistance	7 gn, amplitude = +/- 1.5 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
shock resistance	30 gn (duration = 11 ms) conforming to IEC 60068-2-27
IP degree of protection	IP40 double insulation conforming to IEC 60529

Offer Sustainability


Not Green Premium product	Not Green Premium product
Compliant - since 1001 - Schneider Electric declaration of conformity	Compliant - since 1001 - Schneider Electric declaration of conformity
WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and	Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and
Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.	Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.
For more information go to www.p65warnings.ca.gov	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------


Dimensions

Sensor Dimensions

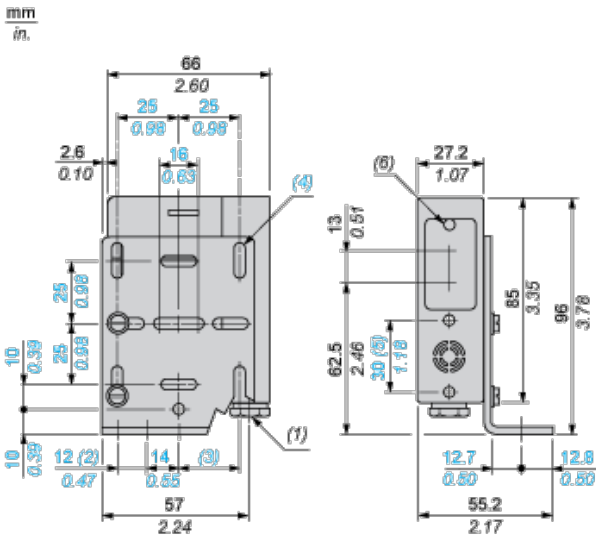

- (1) 9P cable gland
- (2) 2 elongated holes Ø 6.5 x 10
- (3) 1 elongated hole Ø 6.5 x 24
- (4) 8 elongated holes Ø 4.2 x 10
- (5) Front fixing (Ø 4 screws and inserts included)
- (6) Yellow LED

Bracket Fixing




- (1) 2 elongated holes Ø 6.5 x 16.5

(2) 1 elongated hole Ø 6.5 x 30.5

Wiring Schemes

NO Function

Object present



Terminal Connections


1 NO relay output

- 1 Ø — A1 (~/-)
- 2 Ø — A2 (~/+)
- 3 Ø —
- 4 Ø — ~ 250 V, 100 VA max.
- 5 Ø — ~ 250 V, 100 VA max.

Curves


Detection Curve

Reflex System

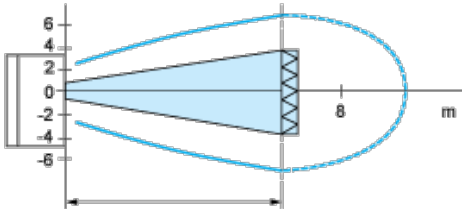

Excess Gain Curves (Ambient Temperature: + 25° C)

Infrared reflex system with reflector XUZC80

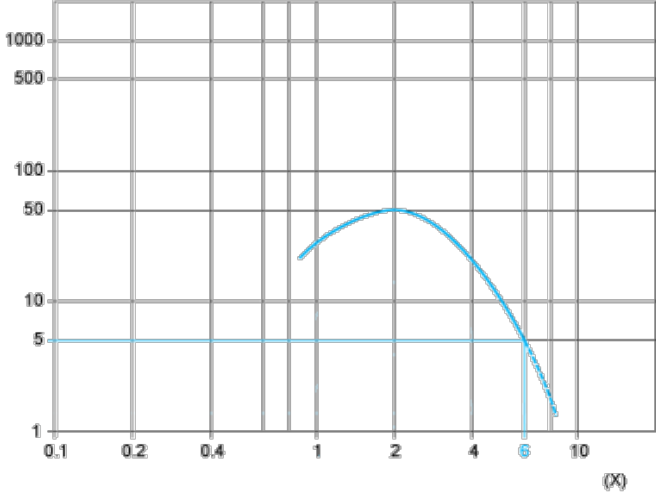

(x) Distance (mm)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru