

High Reliability Serial EEPROMs

I²C BUS BR24□□□□family





BR24T□□□□Series

No.11001EAT21

Description

BR24T DD-W series is a serial EEPROM of I2C BUS interface method

Features

- Completely conforming to the world standard I²C BUS.
 All controls available by 2 ports of serial clock (SCL) and serial data(SDA)
- 2) Other devices than EEPROM can be connected to the same port, saving microcontroller port
- 3) 1.7V~5.5V single power source action most suitable for battery use
- 4) 1.7V~5.5Vwide limit of action voltage, possible FAST MODE 400KHz action
- 5) Page write mode useful for initial value write at factory shipment
- 6) Auto erase and auto end function at data write
- 7) Low current consumption
- 8) Write mistake prevention function
 Write (write protect) function added
 Write mistake prevention function at low voltage
- 9) DIP-T8/SOP8/SOP-J8/SSOP-B8/TSSOP-B8/TSSOP-B8J/MSOP8/VSON008X2030 various packages
- 10) Data rewrite up to 1,000,000 times
- 11) Data kept for 40 years
- 12) Noise filter built in SCL / SDA terminal
- 13) Shipment data all address FFh

●BR24T series

Capacity	Bit format	Туре	Power source Voltage	DIP-T8	SOP8	SOP-J8	SSOP-B8	TSSOP-B8	TSSOP-B8J	MSOP8	VSON008 X2030
1Kbit	128×8	BR24T01-W	1.7~5.5V	•	•	•	•	•	•	•	•
2Kbit	256×8	BR24T02-W	1.7~5.5V	•	•	•	•	•	•	•	•
4Kbit	512×8	BR24T04-W	1.7~5.5V	•	•	•	•	•	•	•	•
8Kbit	1K×8	BR24T08-W	1.7~5.5V	•	•	•	•	•	•	•	•
16Kbit	2K×8	BR24T16-W	1.7~5.5V	•	•	•	•	•	•	•	•
32Kbit	4K×8	BR24T32-W	1.7~5.5V	•	•	•	•	•	•	•	•
64Kbit	8K×8	BR24T64-W	1.7~5.5V	•	•	•	•	•	•	•	•
128Kbit	16K×8	BR24T128-W	1.7~5.5V	•	•	•	•	•	•	•	•
256Kbit	32K×8	BR24T256-W	1.7~5.5V	•	•	•	•	•			
512Kbit	64K×8	BR24T512-W	1.7~5.5V	*	*	☆	*	☆			
1024Kbit	128K×8	BR24T1M-W	1.7~5.5V	*	*	*					

*:Developing

● Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Impressed voltage	V _{CC}	-0.3~+6.5	V
		450 (SOP8)*1	
		450 (SOP-J8)*2	
		300 (SSOP-B8) ^{*3}	mW
Permissible	Pd	330 (TSSOP-B8)*4	
dissipation	Pu	310 (TSSOP-B8J)*5	
		310 (MSOP8) *6	
		300 (VSON008X2030)*7	
		800 (DIP-T8)*8	
Storage temperature range	Tstg	−65~+150	°C
Action temperature range	Topr	−40~+85	°C
Terminal voltage	-	-0.3~Vcc+1.0 ^{*9}	٧
Junction temperature *10	Tjmax	150	ပ္

^{*1,*2} When using at Ta=25°C or higher 4.5mW to be reduced per 1°C.

Terminal Voltage is not under -1.0V. (BR24T16/32/64/128/256/512/1M-W)

●Memory cell characteristics (Ta=25°C, Vcc=1.7~55V)

Parameter		Unit			
Farameter	Min.	Тур.	Max	Offic	
Number of data rewrite times *1	1,000,000	1	1	Times	
Data hold years *1	40	_	_	Years	

^{*1}Not 100% TESTED

Recommended operating conditions

Parameter	Symbol	Ratings	Unit	
Power source voltage	Vcc	1.7~5.5	V	
Input voltage	V _{IN}	0~Vcc		

●Electrical characteristics (Unless otherwise specified, Ta=-40~+85°C, VCC=1.7~5.5V)

Parameter	Symbol	Limits			Unit	Conditions
Parameter	Symbol	Min.	Тур.	Max.	Onit	Conditions
"H" input voltage 1	V _{IH1}	0.7Vcc	_	Vcc+1.0	V	
"L" input voltage 1	V _{IL1}	-0.3 ^{*2}	_	0.3Vcc	V	
"L" output voltage 1	V _{OL1}	_	_	0.4	V	I _{OL} =3.0mA, 2.5V≦Vcc≦5.5V (SDA)
"L" output voltage 2	V _{OL2}	_	_	0.2	V	I _{OL} =0.7mA, 1.7V≦Vcc<2.5V (SDA)
Input leak current	ILI	-1	_	1	μΑ	V _{IN} =0~Vcc
Output leak current	I _{LO}	-1	_	1	μΑ	V _{OUT} =0~Vcc (SDA)
		_	_	2.0		Vcc=5.5V,f _{SCL} =400kHz, t _{WR} =5ms, Byte write, Page write BR24T01/02/04/08/16/32/64-W
	I _{CC1}	_	_	2.5	mA	Vcc=5.5V,f _{SCL} =400kHz, t _{WR} =5ms, Byte write, Page write BR24T128/256-W
Current consumption at action		_	_	4.5		Vcc=5.5V,f _{SCL} =400kHz, t _{WR} =5ms, Byte write, Page write BR24T512/1M-W
		_	_	0.5	mA	Vcc=5.5V,f _{SCL} =400kHz Random read, current read, sequential read BR24T01/02/04/08/16/32/64/128/256-W
	I _{CC2}	_	_	2.0		Vcc=5.5V,f _{SCL} =400kHz Random read, current read, sequential read BR24T512/1M-W
Standby current	las					Vcc=5.5V, SDA • SCL=Vcc A0,A1,A2=GND,WP=GND BR24T01/02/04/08/16/32/64/128/256-W
Standby current	I _{SB}	_	_	3.0	μΑ	Vcc=5.5V, SDA • SCL=Vcc A0, A1, A2=GND, WP=GND BR24T512/1M-W

O Radiation resistance design is not made.

^{*3,*7} When using at Ta=25°C or higher 3.0mW to be reduced per 1°C.

^{*4} When using at Ta=25°C or higher 3.3mW to be reduced per 1°C.

^{*5, *6} When using at Ta=25°C or higher 3.1mW to be reduced per 1°C.

^{*8} When using at Ta=25°C or higher 8.1mW to be reduced per 1°C.

^{*9} The Max value of Terminal Voltage is not over 6.5V.

When the pulse width is 50ns or less, the Min value of

the Min value of Terminal Voltage is not under -0.8V. (BR24T01/02/04/08-W)

^{*10} Junction temperature at the storage condition.

^{*1} BR24T512/1M-W is a target value because it is developing.

^{*2} When the pulse width is 50ns or less, it is -1.0V. (BR24T16/32/64/128/256/512/1M-W) When the pulse width is 50ns or less, it is -0.8V. (BR24T01/02/04/08-W)

● Action timing characteristics (Unless otherwise specified, Ta=-40~+85°C, VCC=1.7~5.5V)

Parameter	Symbol		Unit		
Parameter	Symbol	Min.	Тур.	Max.	Unit
SCL frequency	fSCL	-	_	400	kHz
Data clock "HIGH" time	tHIGH	0.6	_	_	μs
Data clock "LOW" time	tLOW	1.2	_	_	μs
SDA, SCL rise time *1	tR	-	_	1.0	μs
SDA, SCL fall time *1	tF	-	_	1.0	μs
Start condition hold time	tHD:STA	0.6	_	_	μs
Start condition setup time	tSU:STA	0.6	_	_	μs
Input data hold time	tHD:DAT	0	_	_	ns
Input data setup time	tSU:DAT	100	_	_	ns
Output data delay time	tPD	0.1	_	0.9	μs
Output data hold time	tDH	0.1	_	_	μs
Stop condition setup time	tSU:STO	0.6	_	_	μs
Bus release time before transfer start	tBUF	1.2	_	_	μs
Internal write cycle time	tWR	-	_	5	ms
Noise removal valid period (SDA, SCL terminal)	tl	_	_	0.1	μs
WP hold time	tHD:WP	1.0	_	_	μs
WP setup time	tSU:WP	0.1	_	_	μs
WP valid time	tHIGH:WP	1.0	_	_	μs

^{*1} Not 100% TESTED.

Condition Input data level:VIL=0.2xVcc VIH=0.8xVcc Input data timing refarence level: 0.3xVcc/0.7xVcc Output data timing refarence level: 0.3xVcc/0.7xVcc Rise/Fall time : ≦20ns

Sync data input / output timing




Fig.1-(a) Sync data input / output timing




Fig.1-(b) Start-stop bit timing




Fig.1-(c) Write cycle timing




Fig.1-(d) WP timing at write execution





Fig.1-(e) WP timing at write cancel

Block diagram

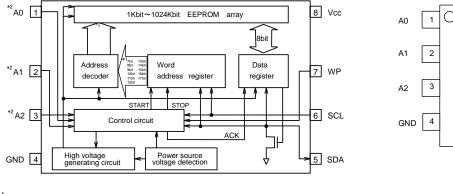

Vcc BR24T01-W 8 BR24T02-W BR24T04-W BR24T08-W BR24T16-W BR24T32-W BR24T64-W 6 SCL BR24T128-W BR24T256-W BR24T512-W SDA 5 BR24T1M-W

1 7bit: BR24T01-W 12bit: BR24T32-W 8bit: BR24T02-W 13bit: BR24T64-W 9bit: BR24T04-W 14bit: BR24T128-W 10bit: BR24T08-W 15bit: BR24T256-W 11bit: BR24T16-W 16bit: BR24T512-W

17bit: BR24T1M-W

*2 A0= Don't use : BR24T04-W, BR24T1M-W A0, A1=Don't use: BR24T08-W A0, A1, A2=Don't use: BR24T16-W


Fig.2 Block diagram

Pin assignment and description

Terminal Name	Input/ Output	BR24T01-W	BR24T02-W	BR24T04-W BR24T08-W BR24T16-W			BR24T32/64/ 128/256/512-W	BR24T1M-W	
A0	Input	Slave addr	ess setting	Don't use*			Slave address setting	Don't use*	
A1	Input	Slav	e address se	tting Don't use*			Slave address setting		
A2	Input		Slave addr	ess setting Don't use*			Slave address setting		
GND	_		Reference voltage of all input / output, 0V						
SDA	Input/ output		Serial data input serial data output						
SCL	Input	Serial clock input							
WP	Input	Write protect terminal							
Vcc	_	Connect the power source.							

^{*}Pins not used as device address may be set to any of 'H', 'L', and 'Hi-Z'.

● Characteristic data (The following values are Typ. ones.)

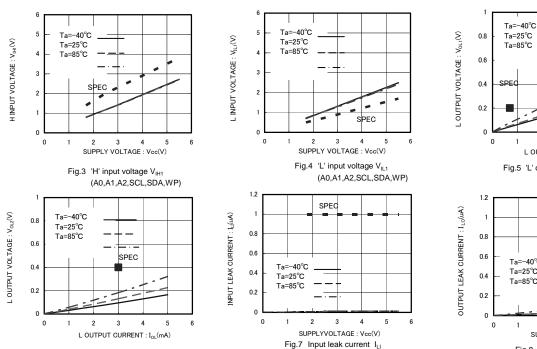





Fig.6 'L' output voltage V_{OL2} - I_{OL} (Vcc=2.5V)


(A0,A1,A2,SCL,WP)

Fig.8 Output leak current ILO(SDA)

● Characteristic data (The following values are Typ. ones.)

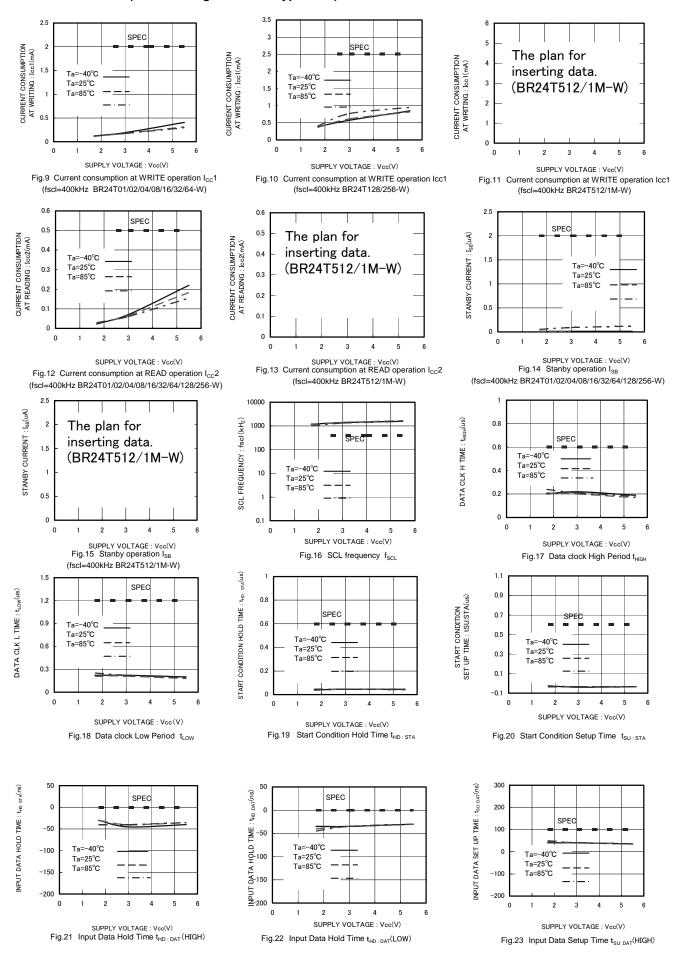

● Characteristic data (The following values are Typ. ones.)

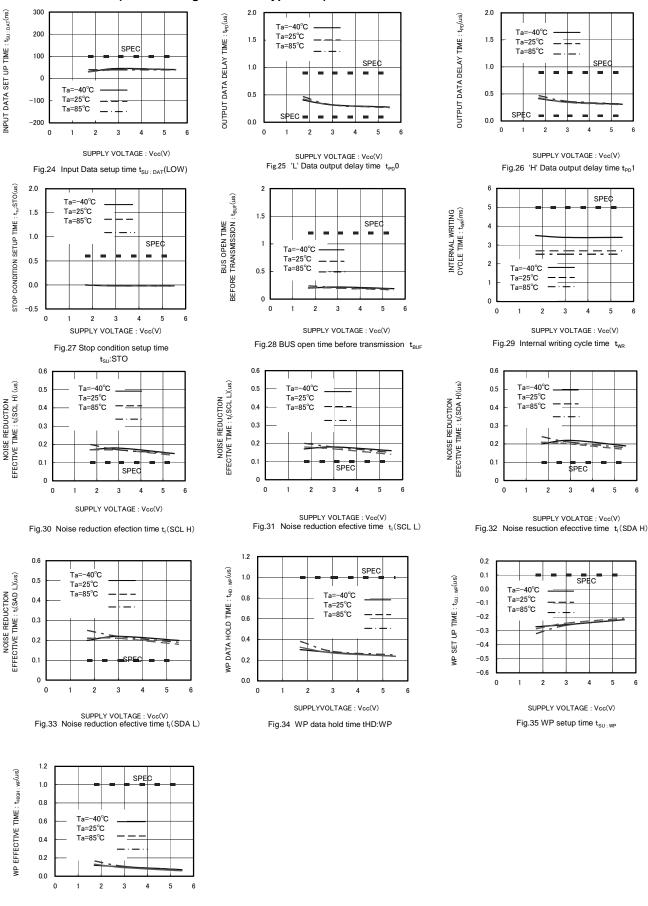

 $\label{eq:SUPPLYVOLTAGE:Vcc(V)} \mbox{Fig.36 WP efective time } t_{\mbox{\scriptsize HIGH:WP}}$

●I²C BUS communication

Ol²C BUS data communication

I²C BUS data communication starts by start condition input, and ends by stop condition input. Data is always 8bit long, and acknowledge is always required after each byte. I²C BUS carries out data transmission with plural devices connected by 2 communication lines of serial data (SDA) and serial clock (SCL).

Among devices, there are "master" that generates clock and control communication start and end, and "slave" that is controlled by address peculiar to devices. EEPROM becomes "slave". And the device that outputs data to bus during data communication is called "transmitter", and the device that receives data is called "receiver".




Fig.37 Data transfer timing

OStart condition (Start bit recognition)

- Before executing each command, start condition (start bit) where SDA goes from 'HIGH' down to 'LOW' when SCL is 'HIGH' is necessary.
- This IC always detects whether SDA and SCL are in start condition (start bit) or not, therefore, unless this confdition is satisfied, any command is executed.

OStop condition (stop bit recongnition)

· Each command can be ended by SDA rising from 'LOW' to 'HIGH' when stop condition (stop bit), namely, SCL is 'HIGH'

OAcknowledge (ACK) signal

- This acknowledge (ACK) signal is a software rule to show whether data transfer has been made normally or not. In master and slave, the device (µ-COM at slave address input of write command, read command, and this IC at data output of read command) at the transmitter (sending) side releases the bus after output of 8bit data.
- The device (this IC at slave address input of write command, read command, and µ-COM at data output of read command) at the receiver (receiving) side sets SDA 'LOW' during 9 clock cycles, and outputs acknowledge signal (ACK signal) showing that it has received the 8bit data.
- · This IC, after recognizing start condition and slave address (8bit), outputs acknowledge signal (ACK signal) 'LOW'.
- Each write action outputs acknowledge signal (ACK signal) 'LOW', at receiving 8bit data (word address and write data).
- Each read action outputs 8bit data (read data), and detects acknowledge signal (ACK signal) 'LOW'. When acknowledge signal (ACK signal) is detected, and stop condition is not sent from the master (µ-COM) side, this IC continues data output. When acknowledge signal (ACK signal) is not detected, this IC stops data transfer, and recognizes stop cindition (stop bit), and ends read action. And this IC gets in status.

ODevice addressing

- Output slave address after start condition from master.
- The significant 4 bits of slave address are used for recognizing a device type.
 The device code of this IC is fixed to '1010'.
- Next slave addresses (A2 A1 A0 --- device address) are for selecting devices, and plural ones can be used on a same bus according to the number of device addresses.
- The most insignificant bit (R/W --- READ / WRITE) of slave address is used for designating write or read action, and is as shown below.

Setting R/ \overline{W} to 0 ----- write (setting 0 to word address setting of random read) Setting R/ \overline{W} to 1 ----- read


Туре	Slave address				Maximum number of Connected buses				
BR24T01-W,BR24T02-W	1	0	1	0	A2	A1	A0	R/W	8
BR24T04-W	1	0	1	0	A2	A1	P0	R/\overline{W}	4
BR24T08-W	1	0	1	0	A2	P1	P0	R/W	2
BR24T16-W	1	0	1	0	P2	P1	P0	R/W	1
BR24T32-W,BR24T64-W,BR24T128-W, BR24T256-W,BR24T512-W	1	0	1	0	A2	A1	A0	R/W	8
BR24T1M-W	1	0	1	0	A2	A1	P0	R/W	4

P0~P2 are page select bits.

Write Command


OWrite cycle

• Arbitrary data is written to EEPROM. When to write only 1 byte, byte write is normally used, and when to write continuous data of 2 bytes or more, simultaneous write is possible by page write cycle. The maximum number of write bytes is specified per device of each capacity. Up to 256 arbitrary bytes can be written.(In the case of BR24T1M-W)




As for WA7, BR24T01-W becomes Don't care.

Fig.38 Byte write cycle (BR24T01/02/04/08/16-W)




11 As for WA12, BR24T32-W becomes Don't care.
As for WA13, BR24T32/64-W becomes Don't care.
As for WA14, BR24T32/64/128-W becomes Don't care.
As for WA15, BR24T32/64/128/256-W becomes Don't care.

Fig.39 Byte write cycle (BR24T32/64/128/256/512/1M-W)



*1 As for WA7, BR24T01-W becomes Don't care.
*2 As for BR24T01/02-W becomes (n+7)

Fig.40 Page write cycle (BR24T01/02/04/08/16-W)




1 As for WA12, BR24T32-W becomes Don't care. As for WA13, BR24T32/64-W becomes Don't care. As for WA14, BR24T32/64/128-W becomes Don't care. As for WA15, BR24T32/64/128/256-W becomes Don't care.

2 As for BR24T128/256-W becomes (n+63) As for BR24T512-W becomes (n+127) As for BR24T1M-W becomes (n+255)

Fig.41 Page write cycle (BR24T32/64/128/256/512/1M-W)

Note)



- 1 In BR24T16-W. A2 becomes P2.
- 2 In BR24T08/16-W, A1 becomes P1.
- 3 In BR24T04/08/16/1M-W A0 becomes P0.

Fig.42 Difference of slave address of each type

- During internal write execution, all input commands are ignored, therefore ACK is not sent back.
- · Data is written to the address designated by word address (n-th address)
- By issuing stop bit after 8bit data input, write to memory cell inside starts.
- When internal write is started, command is not accepted for tWR (5ms at maximum).

• By page write cycle, the following can be written in bulk : Up to 8Byte (BR24T01-W, BR24T02-W)

Up to 16Byte (BR24T04-W, BR24T08-W, BR24T16-W)

Up to 32Byte (BR24T32-W, BR24T64-W) Up to 64Byte (BR24T128-W, BR24T256-W)

Up to 128Byte (BR24T512-W) Up to 256Byte (BR24T1M-W)

And when data of the maximum bytes or higher is sent, data from the first byte is overwritten. (Refer to "Internal address increment" of "Notes on page write cycle" in P10.)

- As for page write cycle of BR24T01-W and BR24T02-W, after the significant 4 bits (in the case of BR24T01-W) of word address, or the significant 5 bits (in the case of BR24T02-W) of word address are designated arbitrarily, by continuing data input of 2 bytes or more, the address of insignificant 3 bits is incremented internally, and data up to 8 bytes can be written.
- As for page write command of BR24T04-W, BR24T08-W and BR24T16-W, after page select bit 'P0'(in the case of BR24T04-W), after page select bit 'P0,P1'(in the case of BR24T08-W), after page select bit 'P0,P1,P2'(in the case of BR24T16-W) of slave address are designated arbitrarily, by continuing data input of 2 bytes or more, the address of insignificant 4 bits is incremented internally, and data up to 16 bytes can be written.
- As for page write cycle of BR24T32-W and BR24T64-W, after the significant 7 bits (in the case of BR24T32-W) of word address, or the significant 8 bits (in the case of BR24T64-W) of word address are designated arbitrarily, by continuing data input of 2 bytes or more, the address of insignificant 5 bits is incremented internally, and data up to 32 bytes can be written.
- As for page write cycle of BR24T128-W and BR24T256-W, after the significant 8 bits (in the case of BR24T128-W) of word address, or the significant 9 bits (in the case of BR24T256-W) of word address are designated arbitrarily, by continuing data input of 2 bytes or more, the address of insignificant 6 bits is incremented internally, and data up to 64 bytes can be written.
- As for page write cycle of BR24T512-W after the significant 9 bits of word address is designated arbitrarily, by continuing data input of 2 bytes or more, the address of insignificant 7 bits is incremented internally, and data up to 128 bytes can be written.
- As for page write cycle of BR24T1M-W after page select bit 'P0' and the significant 8 bit of word address are designated arbitrarily, by continuing data input of 2 bytes or more, the address of insignificant 8 bits is incremented internally, and data up to 256 bytes can be written.

ONotes on page write cycle

List of numbers of page write


Number of Pages	8Byte	16Byte	32Byte	64Byte	128Byte	256Byte
Product number	BR24T01-W BR24T02-W	BR24T04-W BR24T08-W BR24T16-W	BR24T32-W BR24T64-W	BR24T128-W BR24T256-W	BR24T512-W	BR24T1M-W

The above numbers are maximum bytes for respective types. Any bytes below these can be written.

In the case BR24T256-W, 1 page=64bytes, but the page write cycle time is 5ms at maximum for 64byte bulk write. It does not stand 5ms at maximum × 64byte=320ms(Max.)

OInternal address increment

Page write mode (in the case of BR24T16-W)



For example, when it is started from address 0Eh, therefore, increment is made as below, 0Eh→0Fh→00h→01h··· which please note.

※0Eh···0E in hexadecimal, therefore, 00001110 becomes a binary number.

OWrite protect (WP) terminal

· Write protect (WP) function

When WP terminal is set Vcc (H level), data rewrite of all addresses is prohibited. When it is set GND (L level), data rewrite of all address is enabled. Be sure to connect this terminal to Vcc or GND, or control it to H level or L level. Do not use it open.


In the case of use it as an ROM, it is recommended to connect it to pull up or Vcc.

At extremely low voltage at power ON / OFF, by setting the WP terminal 'H', mistake write can be prevented.

Read Command


ORead cycle

Data of EEPROM is read. In read cycle, there are random read cycle and current read cycle. Random read cycle is a command to read data by designating address, and is used generally. Current read cycle is a command to read data of internal address register without designating address, and is used when to verify just after write cycle. In both the read cycles, sequential read cycle is available, and the next address data can be read in succession.

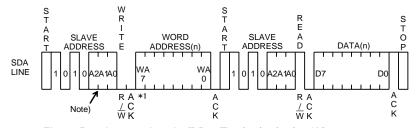


*1 As for WA7, BR24T01-W become Don't care.

Fig.43 Random read cycle (BR24T01/02/04/08/16-W)



*1 As for WA12, BR24T32-W become Don't care. As for WA13, BR24T32/64-W become Don't care. As for WA14, BR24T32/64/128-W become Don't care. As for WA15, BR24T32/64/128/256-W become Don't care.


Fig.44 Random read cycle (BR24T32/64/128/256/512/1M-W)



*1 As for WA7, BR24T01-W becomes Don't care.*2 As for BR24T01/02-W becomes (n+7)

2 7.0 10. 2.12 1.0 1/02 1. 2000.1100 (.....

Fig.45 Current read cycle



*1 As for WA12, BR24T32-W becomes Don't care.
As for WA13, BR24T32/64-W becomes Don't care.
As for WA14, BR24T32/64/128-W becomes Don't care.
As for WA15, BR24T32/64/128/256-W becomes Don't care.

*2 As for BR24T128/256-W becomes (n+63) As for BR24T512-W becomes (n+127) As for BR24T1M-W becomes (n+255)

Fig.46 Sequential read cycle (in the case of current read cycle)

- In random read cycle, data of designated word address can be read.
- When the command just before current read cycle is random read cycle, current read cycle (each including sequential read cycle), data of incremented last read address (n)-th address, i.e., data of the (n+1)-th address is output.
- When ACK signal 'LOW' after D0 is detected, and stop condition is not sent from master (µ-COM) side, the next address data can be read in succession.
- Read cycle is ended by stop condition where 'H' is input to ACK signal after D0 and SDA signal is started at SCL signal 'H'.
- When 'H' is not input to ACK signal after D0, sequential read gets in, and the next data is output. Therefore, read command cycle cannot be ended. When to end read command cycle, be sure input stop condition to input 'H' to ACK signal after D0, and to start SDA at SCL signal 'H'.
- Sequential read is ended by stop condition where 'H' is input to ACK signal after arbitrary D0 and SDA is started at SCL signal 'H'.




Fig.47 Difference of slave address of each type

Software reset

Software reset is executed when to avoid malfunction after power on, and to reset during command input. Software reset has several kinds, and 3 kinds of them are shown in the figure below. (Refer to Fig.48-(a), Fig.48-(b), Fig.48-(c).) In dummy clock input area, release the SDA bus ('H' by pull up). In dummy clock area, ACK output and read data '0' (both 'L' level) may be output from EEPROM, therefore, if 'H' is input forcibly, output may conflict and over current may flow, leading to instantaneous power failure of system power source or influence upon devices.




Fig.48-(a) The case of dummy clock +START+START+ command input





Fig.48-(b) The case of START +9 dummy clocks +START+ command input



XStart command from START input.

Acknowledge polling

During internal write execution, all input commands are ignored, therefore ACK is not sent back. During internal automatic write execution after write cycle input, next command (slave address) is sent, and if the first ACK signal sends back 'L', then it means end of write action, while if it sends back 'H', it means now in writing. By use of acknowledge polling, next command can be executed without waiting for tWR = 5ms.

When to write continuously, $R/\overline{W} = 0$, when to carry out current read cycle after write, slave address $R/\overline{W} = 1$ is sent, and if ACK signal sends back 'L', then execute word address input and data output and so forth.

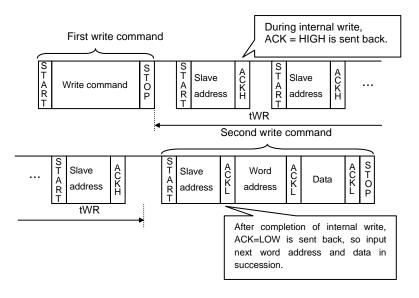


Fig.49 Case to continuously write by acknowledge polling

WP valid timing (write cancel)

WP is usually fixed to 'H' or 'L', but when WP is used to cancel write cycle and so forth, pay attention to the following WP valid timing. During write cycle execution, in cancel valid area, by setting WP='H', write cycle can be cancelled. In both byte write cycle and page write cycle, the area from the first start condition of command to the rise of clock to taken in D0 of data(in page write cycle, the first byte data) is cancel invalid area.

WP input in this area becomes Don't care. The area from the rise of SCL to take in D0 to input the stop condition is cancel valid area. And, after execution of forced end by WP, standby status gets in.

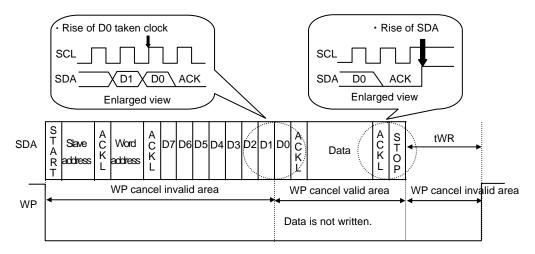


Fig.50 WP valid timing

●Command cancel by start condition and stop condition

During command input, by continuously inputting start condition and stop condition, command can be cancelled. (Fig.51) However, in ACK output area and during data read, SDA bus may output 'L', and in this case, start condition and stop condition cannot be input, so reset is not available. Therefore, execute software reset. And when command is cancelled by start, stop condition, during random read cycle, sequential read cycle, or current read cycle, internal setting address is not determined, therefore, it is not possible to carry out current read cycle in succession. When to carry out read cycle in succession, carry out random read cycle.

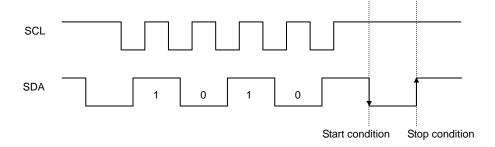


Fig.51 Case of cancel by start, stop condition during slave address input

●I/O peripheral circuit

OPull up resistance of SDA terminal

SDA is NMOS open drain, so requires pull up resistance. As for this resistance value (R_{PU}), select an appropriate value to this resistance value from microcontroller V_{IL} , I_L , and V_{OL} - I_{OL} characteristics of this IC. If R_{PU} is large, action frequency is limited. The smaller the R_{PU} , the larger the consumption current at action.

OMaximum value of R_{PU}

The maximum value of R_{PU} is determined by the following factors.

- ①SDA rise time to be determined by the capacitance (CBUS) of bus line of R_{PU} and SDA should be tR or below. And AC timing should be satisfied even when SDA rise time is late.
- ②The bus electric potential A to be determined by input leak total (I_L) of device connected to bus at output of 'H' to SDA bus and R_{PU} should sufficiently secure the input 'H' level (V_{IH}) of microcontroller and EEPROM including recommended noise margin 0.2Vcc.

$$\begin{split} & \text{Vcc-ILR}_{\text{PU}} - 0.2 \text{ Vcc } \geqq \text{ ViH} \\ & \therefore \quad \text{RPU} \le \frac{0.8 \text{Vcc-ViH}}{\text{IL}} \\ & \text{Ex.) VCC = 3V } \quad \text{IL=10}{\mu}\text{A} \quad \text{VIH=0.7 VCC} \\ & \text{from} \textcircled{2} \\ & \text{RPU} \le \frac{0.8 \times 3 - 0.7 \times 3}{10 \times 10^{-6}} \\ & \le \quad 300 \; [\text{k}\,\Omega] \end{split}$$




Fig.52 I/O circuit diagram

O Minimum value of R_{PU}

The minimum value of R_{PU} is determined by the following factors.

When IC outputs LOW, it should be satisfied that V_{OLMAX}=0.4V and I_{OLMAX}=3mA.

$$\frac{VCC - VOL}{RPU} \le IOL$$

$$\therefore RPU \ge \frac{VCC - VOL}{IOL}$$

②Volmax= should secure the input 'L' level (VIL) of microcontroller and EEPROM including recommended noise margin 0.1Vcc.

Volmax ≤ VIL-0.1 Vcc

Ex.) Vcc =3V, VoL=0.4V, IoL=3mA, microcontroller, EEPROM V_{IL}=0.3Vcc

Therefore, the condition ② is satisfied.


OPull up resistance of SCL terminal


When SCL control is made at CMOS output port, there is no need, but in the case there is timing where SCL becomes 'Hi-Z', add a pull up resistance. As for the pull up resistance, one of several $k\Omega$ ~ several ten $k\Omega$ is recommended in consideration of drive performance of output port of microcontroller.

Cautions on microcontroller connection

ORs

In I²C BUS, it is recommended that SDA port is of open drain input/output. However, when to use CMOS input / output of tri state to SDA port, insert a series resistance Rs between the pull up resistance Rpu and the SDA terminal of EEPROM. This is controls over current that occurs when PMOS of the microcontroller and NMOS of EEPROM are turned ON simultaneously. Rs also plays the role of protection of SDA terminal against surge. Therefore, even when SDA port is open drain input/output, Rs can be used.





output of EEPROM.

Fig.53 I/O circuit diagram

Fig.54 Input / output collision timing

OMaximum value of Rs

The maximum value of Rs is determined by the following relations.

- ①SDA rise time to be determined by the capacity (CBUS) of bus line of Rpu and SDA should be tR or below. And AC timing should be satisfied even when SDA rise time is late.
- ②The bus electric potential 🕲 to be determined by Rpu and Rs the moment when EEPROM outputs 'L' to SDA bus sufficiently secure the input 'L' level (V_{IL}) of microcontroller including recommended noise margin 0.1Vcc.




Fig.55 I/O Circuit Diagram

$$\frac{\left(Vcc - VoL\right)}{Rpu + Rs} + VoL + 0.1Vcc \le VIL$$

$$\therefore \quad Rs \le \frac{\left(Vcc - VoL\right)}{1.1Vcc - ViL} \times RPU$$

Ex)VCC=3V VIL=0.3VCC VOL=0.4V RPU=20k Ω

$$Rs \leq \frac{0.3 \times 3 - 0.4 - 0.1 \times 3}{1.1 \times 3 - 0.3 \times 3} \times 20 \times 10^{3}$$

$$\leq 1.67[k\Omega]$$

OMinimum value of Rs

The minimum value of Rs is determined by over current at bus collision. When over current flows, noises in power source line, and instantaneous power failure of power source may occur. When allowable over current is defined as I, the following relation must be satisfied. Determine the allowable current in consideration of impedance of power source line in set and so forth. Set the over current to EEPROM 10mA or below.




Fig.56 I/O circuit diagram

$$\therefore$$
 Rs $\geq \frac{VCC}{I}$

EX) V_{CC}=3V I=1mA

$$Rs \ge \frac{3}{10 \times 10^{-3}}$$

$$\geq$$
 300 [Ω]

●I²C BUS input / output circuit

OInput (A0, A1, A2, SCL, WP)




Fig.57 Input pin circuit diagram

OInput / output (SDA)




Fig.58 Input / output pin circuit diagram

Notes on power ON

At power on, in IC internal circuit and set, Vcc rises through unstable low voltage area, and IC inside is not completely reset, and malfunction may occur. To prevent this, functions of POR circuit and LVCC circuit are equipped. To assure the action, observe the following conditions at power on.

- 1. Set SDA = 'H' and SCL ='L' or 'H'
- 2. Start power source so as to satisfy the recommended conditions of t_R, t_{OFF}, and Vbot for operating POR circuit.




Fig.59 Rise waveform diagram

Recommended conditions of tR, tOFF, Vbot

tR	tOFF	Vbot		
10ms or below	10ms or larger	0.3V or below		
100msor below	10msor larger	0.2V or below		

3. Set SDA and SCL so as not to become 'Hi-Z'.

When the above conditions 1 and 2 cannot be observed, take the following countermeasures.

- a) In the case when the above condition 1 cannot be observed. When SDA becomes $^{\prime}L^{\prime}$ at power on .
 - →Control SCL and SDA as shown below, to make SCL and SDA, 'H' and 'H'.




Fig.60 When SCL= 'H' and SDA= 'L'




Fig.61 When SCL='L' and SDA='L'

- b) In the case when the above condition 2 cannot be observed.
 - →After power source becomes stable, execute software reset(P12).
- c) In the case when the above conditions 1 and 2 cannot be observed.
 - →Carry out a), and then carry out b).

●Low voltage malfunction prevention function

LVCC circuit prevents data rewrite action at low power, and prevents wrong write. At LVCC voltage (Typ. =1.2V) or below, it prevent data rewrite.

Vcc noise countermeasures

OBypass capacitor

When noise or surge gets in the power source line, malfunction may occur, therefore, for removing these, it is recommended to attach a bypass capacitor (0.1µF) between IC Vcc and GND. At that moment, attach it as close to IC as possible. And, it is also recommended to attach a bypass capacitor between board Vcc and GND.

Notes for use

- (1) Described numeric values and data are design representative values, and the values are not guaranteed.
- (2) We believe that application circuit examples are recommendable, however, in actual use, confirm characteristics further sufficiently. In the case of use by changing the fixed number of external parts, make your decision with sufficient margin in consideration of static characteristics and transition characteristics and fluctuations of external parts and our LSI.
- (3) Absolute maximum ratings


If the absolute maximum ratings such as impressed voltage and action temperature range and so forth are exceeded, LSI may be destructed. Do not impress voltage and temperature exceeding the absolute maximum ratings. In the case of fear exceeding the absolute maximum ratings, take physical safety countermeasures such as fuses, and see to it that conditions exceeding the absolute maximum ratings should not be impressed to LSI.

- (4) GND electric potential
 - Set the voltage of GND terminal lowest at any action condition. Make sure that each terminal voltage is lower than that of GND terminal.
- (5) Terminal design


In consideration of permissible loss in actual use condition, carry out heat design with sufficient margin.


- (6) Terminal to terminal shortcircuit and wrong packaging
 - When to package LSI onto a board, pay sufficient attention to LSI direction and displacement. Wrong packaging may destruct LSI. And in the case of shortcircuit between LSI terminals and terminals and power source, terminal and GND owing to foreign matter, LSI may be destructed.
- (7) Use in a strong electromagnetic field may cause malfunction, therefore, evaluate design sufficiently.

Order part number

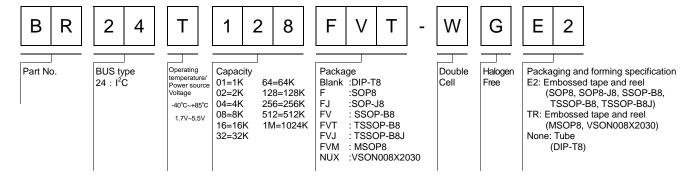



DIP-T8



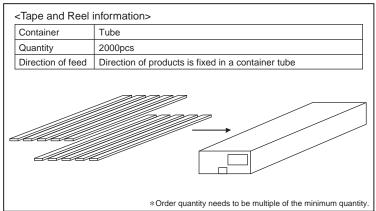



SOP8



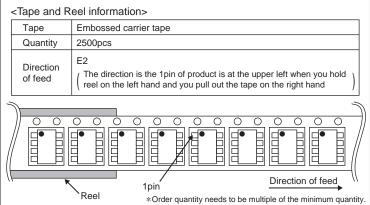



SOP-J8



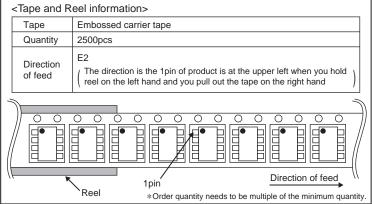



TSSOP-B8



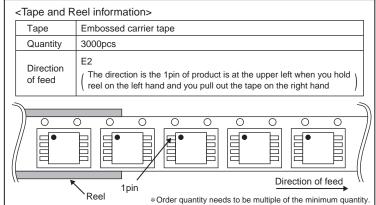



TSSOP-B8J



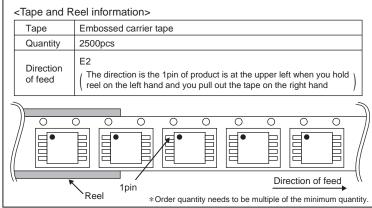



MSOP8



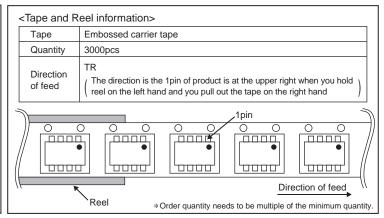

VSON008X2030



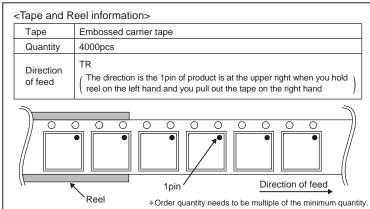

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru