
**Electrical Details**

Electrical Configuration	C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000MΩ
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	Not Applicable

**Mechanical Details**

Head Diameter	6.0mm (0.236")
Nut A/F	N/A. For use in tapped hole
Washer Diameter	N/A
Mounting Torque	0.3Nm (2.65lbf in) max.
Mounting Hole	M5 x 0.8 - 6h
Max. Panel Thickness	N/A
Weight (Typical)	2.0g (0.07oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)					
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFLMC5000100ZC	10pF -20% / +80%	COG/NP0	500#	750						4
SFLMC5000150ZC	15pF -20% / +80%									7
SFLMC5000220ZC	22pF -20% / +80%									10
SFLMC5000330ZC	33pF -20% / +80%									12
*SFLMC5000470ZC	47pF -20% / +80%									1
*SFLMC5000680MC	68pF									15
*SFLMC5000101MC	100pF									2
SFLMC5000151MC	150pF									18
*SFLMC5000221MC	220pF									22
*SFLMC5000331MC	330pF									25
*SFLMC5000471MX	470pF	†X7R	500#	750						10
SFLMC5000681MX	680pF									29
*SFLMC5000102MX	1.0nF									33
SFLMC5000152MX	1.5nF									35
*SFLMC5000222MX	2.2nF									36
SFLMC5000332MX	3.3nF									41
*SFLMC5000472MX	4.7nF									45
SFLMC5000682MX	6.8nF									50
*SFLMC5000103MX	10nF									52
*SFLMC5000153MX	15nF									55
*SFLMC5000223MX	22nF									57
SFLMC5000333MX	33nF									60
*SFLMC2000473MX	47nF									62
SFLMC2000683MX	68nF									65
*SFLMC1000104MX	100nF									68
*SFLMC0500154MX	150nF									>70

# Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended. \* Recommended values. † Also available in COG/NP0.

**Ordering Information - SFLMC range**

SF	L	M	C	500	0101		M	C	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)		Tolerance	Dielectric	Nuts & Washers
Syfer Filter	6.0mm O.D.	M5	C = C Filter	<b>050</b> = 50V <b>100</b> = 100V <b>200</b> = 200V <b>500</b> = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: <b>0101</b> = 100pF <b>0332</b> = 3300pF	<b>M</b> = ±20% <b>Z</b> = -20+80%	<b>C</b> = COG/NP0 <b>X</b> = X7R	<b>0</b> = Without	

Note: Installation tool available on request

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.


Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.



<b>M5 x 0.8 - 6g Thread</b>
<b>6.0mm Round Head</b>

**Electrical Details**

Electrical Configuration	L-C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000MΩ
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	500nH

**Mechanical Details**

Head Diameter	6.0mm (0.236")
Nut A/F	N/A. For use in tapped hole
Washer Diameter	N/A
Mounting Torque	0.3Nm (2.65lbf in) max.
Mounting Hole	M5 x 0.8 - 6h
Max. Panel Thickness	N/A
Weight (Typical)	2.0g (0.07oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20% UOS)	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)					
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFLML5000100ZC	10pF -20% / +80%	C0G/NP0	500#	750						6
SFLML5000150ZC	15pF -20% / +80%									9
SFLML5000220ZC	22pF -20% / +80%									12
SFLML5000330ZC	33pF -20% / +80%									1
*SFLML5000470ZC	47pF -20% / +80%									15
*SFLML5000680MC	68pF									2
*SFLML5000101MC	100pF									19
SFLML5000151MC	150pF									4
*SFLML5000221MC	220pF									20
*SFLML5000331MC	330pF									7
*SFLML5000471MX	470pF	+X7R	500#	750						24
SFLML5000681MX	680pF									10
*SFLML5000102MX	1.0nF									27
SFLML5000152MX	1.5nF									12
*SFLML5000222MX	2.2nF									30
SFLML5000332MX	3.3nF									1
*SFLML5000472MX	4.7nF									16
SFLML5000682MX	6.8nF									34
*SFLML5000103MX	10nF	X7R	200	500						2
*SFLML5000153MX	15nF									19
*SFLML5000223MX	22nF									38
SFLML5000333MX	33nF									3
*SFLML2000473MX	47nF									22
SFLML2000683MX	68nF									41
*SFLML1000104MX	100nF									6
*SFLML0500154MX	150nF									25

# Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended. \* Recommended values. † Also available in C0G/NP0.

**Ordering Information - SFLML range**

SF	L	M	L	500	0101		M	C	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)		Tolerance	Dielectric	Nuts & Washers
Syfer Filter	6.0mm O.D.	M5	L = L-C Filter	<b>050</b> = 50V <b>100</b> = 100V <b>200</b> = 200V <b>500</b> = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: <b>0101</b> = 100pF <b>0332</b> = 3300pF	<b>M</b> = ±20% <b>Z</b> = -20+80%	<b>C</b> = C0G/NP0 <b>X</b> = X7R	<b>0</b> = Without	


Note: Installation tool available on request

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.



## C0G/NP0 & X7R

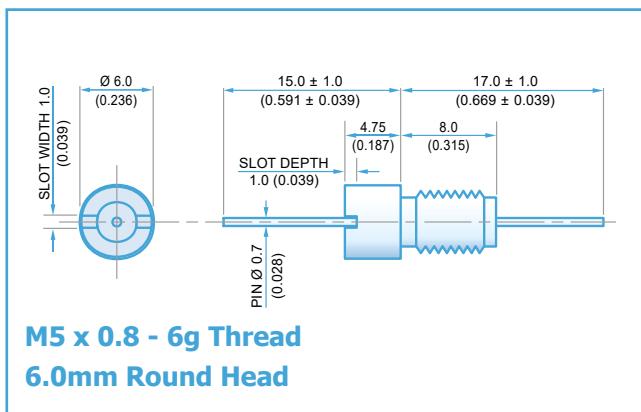

Electrical Details	
Electrical Configuration	Pi Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000MΩ
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	250nH
 <b>Pi</b>	
Mechanical Details	
Head Diameter	6.0mm (0.236")
Nut A/F	N/A. For use in tapped hole
Washer Diameter	N/A
Mounting Torque	0.3Nm (2.65lbf in) max.
Mounting Hole	M5 x 0.8 - 6h
Max. Panel Thickness	N/A
Weight (Typical)	2.0g (0.07oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)					
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFLMP5000200ZC	20pF -20% / +80%	COG/NP0	500#	750					1	11
SFLMP5000300ZC	30pF -20% / +80%								2	15
SFLMP5000440ZC	44pF -20% / +80%								3	19
SFLMP5000660ZC	66pF -20% / +80%								4	23
*SFLMP5000940ZC	94pF -20% / +80%								6	29
*SFLMP500136PMC	136pF								8	35
*SFLMP5000201MC	200pF								11	41
SFLMP5000301MC	300pF							1	15	50
*SFLMP5000441MC	440pF							2	20	57
*SFLMP5000661MC	660pF							3	25	65
*SFLMP5000941MX	940pF	†X7R	X7R					5	31	68
SFLMP5001N36MX	1.36nF							7	37	>70
*SFLMP5000202MX	2nF							10	44	>70
SFLMP5000302MX	3nF							13	51	>70
*SFLMP5000442MX	4.4nF						1	17	59	>70
SFLMP5000662MX	6.6nF						2	21	64	>70
*SFLMP5000942MX	9.4nF						4	27	68	>70
SFLMP50013N6MX	13.6nF						6	34	>70	>70
*SFLMP5000203MX	20nF						9	40	>70	>70
*SFLMP5000303MX	30nF						12	48	>70	>70
*SFLMP5000443MX	44nF	200	500				1	14	54	>70
SFLMP5000663MX	66nF						2	17	63	>70
*SFLMP2000943MX	94nF					4	18	68	>70	>70
SFLMP200136NMX	136nF					8	25	>70	>70	>70
*SFLMP1000204MX	200nF	100	250			10	27	>70	>70	>70
*SFLMP0500304MX	300nF	50	125			13	30	>70	>70	>70

# Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended. \* Recommended values. † Also available in COG/NPO.


## **Ordering Information - SFLMP range**

SF	L	M	P	050	0304	M	X	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Nuts & Washers
Syfer Filter	6.0mm O.D.	M5	P = Pi Filter	<b>050</b> = 50V <b>100</b> = 100V <b>200</b> = 200V <b>500</b> = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: <b>0101</b> = 100pF <b>0332</b> = 3300pF	<b>M</b> = ±20% <b>Z</b> = -20+80%	<b>C</b> = COG/NPO <b>X</b> = X7R	<b>0</b> = Without

Note: Installation tool available on request

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

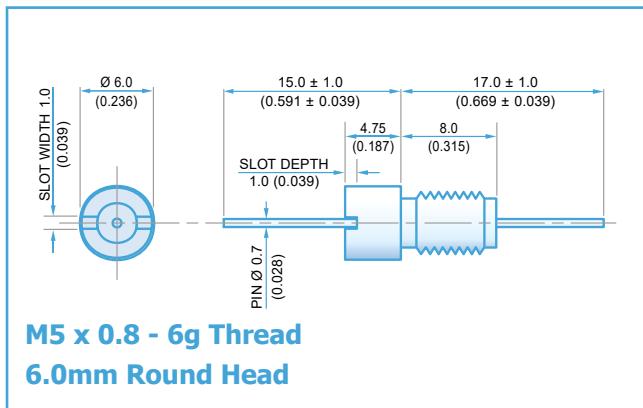**Electrical Details**

Electrical Configuration	T Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000MΩ
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	450nH

**Mechanical Details**

Head Diameter	6.0mm (0.236")
Nut A/F	N/a. For use in tapped hole
Washer Diameter	N/a
Mounting Torque	0.3Nm (2.65lbf in) max.
Mounting Hole	M5 x 0.8 - 6h
Max. Panel Thickness	N/a
Weight (Typical)	2.0g (0.07oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20% UOS)	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)							
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz		
*SFLMT5000100ZC	10pF -20% / +80%	C0G/NP0	500#	750						9		
SFLMT5000150ZC	15pF -20% / +80%									11		
SFLMT5000220ZC	22pF -20% / +80%									1	14	
SFLMT5000330ZC	33pF -20% / +80%									2	18	
*SFLMT5000470ZC	47pF -20% / +80%									4	20	
*SFLMT5000680MC	68pF									6	23	
*SFLMT5000101MC	100pF									9	27	
SFLMT5000151MC	150pF									12	30	
*SFLMT5000221MC	220pF									15	33	
*SFLMT5000331MC	330pF									1	19	36
*SFLMT5000471MX	470pF	+X7R	750	500#						2	21	40
SFLMT5000681MX	680pF									4	24	43
*SFLMT5000102MX	1.0nF									7	28	47
SFLMT5000152MX	1.5nF									10	30	50
*SFLMT5000222MX	2.2nF									13	34	53
SFLMT5000332MX	3.3nF									17	38	57
*SFLMT5000472MX	4.7nF									19	40	59
SFLMT5000682MX	6.8nF									1	23	43
*SFLMT5000103MX	10nF									4	26	45
*SFLMT5000153MX	15nF									7	29	47
*SFLMT5000223MX	22nF									10	33	49
SFLMT5000333MX	33nF									14	36	50
*SFLMT2000473MX	47nF										>70	
*SFLMT2000683MX	68nF									1	17	39
*SFLMT1000104MX	100nF									2	20	42
*SFLMT0500154MX	150nF									4	22	46
										7	25	49
										50	49	68
												>70

# Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended. \* Recommended values. † Also available in C0G/NP0.

**Ordering Information - SFLMT range**

SF	L	M	T	500	0101	M	C	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Nuts & Washers
Syfer Filter	6.0mm O.D.	M5	T = T Filter	<b>050</b> = 50V <b>100</b> = 100V <b>200</b> = 200V <b>500</b> = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: <b>0101</b> = 100pF <b>0332</b> = 330pF	<b>M</b> = ±20% <b>Z</b> = -20+80%	<b>C</b> = C0G/NP0 <b>X</b> = X7R	<b>0</b> = Without

Note: Installation tool available on request

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)