



Representative photograph, actual product appearance may vary.

Due to regional agency approval requirements, some products may not be available in your area. Please contact your regional Honeywell office regarding your product of choice.

CSNE151

CSN Series closed loop current sensor, measures AC, DC or impulse current, 25 amp-turns nominal, ± 36 amp-turns range, smaller housing, 1000 turn

Features

- Current sensing up to 1200 amps
- Measures ac, dc and impulse currents
- Competitive cost/performance ratio
- Rapid response
- High overload capability
- High level of electrical isolation between primary and secondary circuits
- Industrial operating temperature range
- Small size and weight

Typical Applications

- Variable speed drives
- Overcurrent protection
- Ground fault detectors
- Current feedback control systems
- Robotics
- UPS and telecommunication power supplies
- Welding power supplies
- Automotive - Battery management systems
- Wattmeters

Description

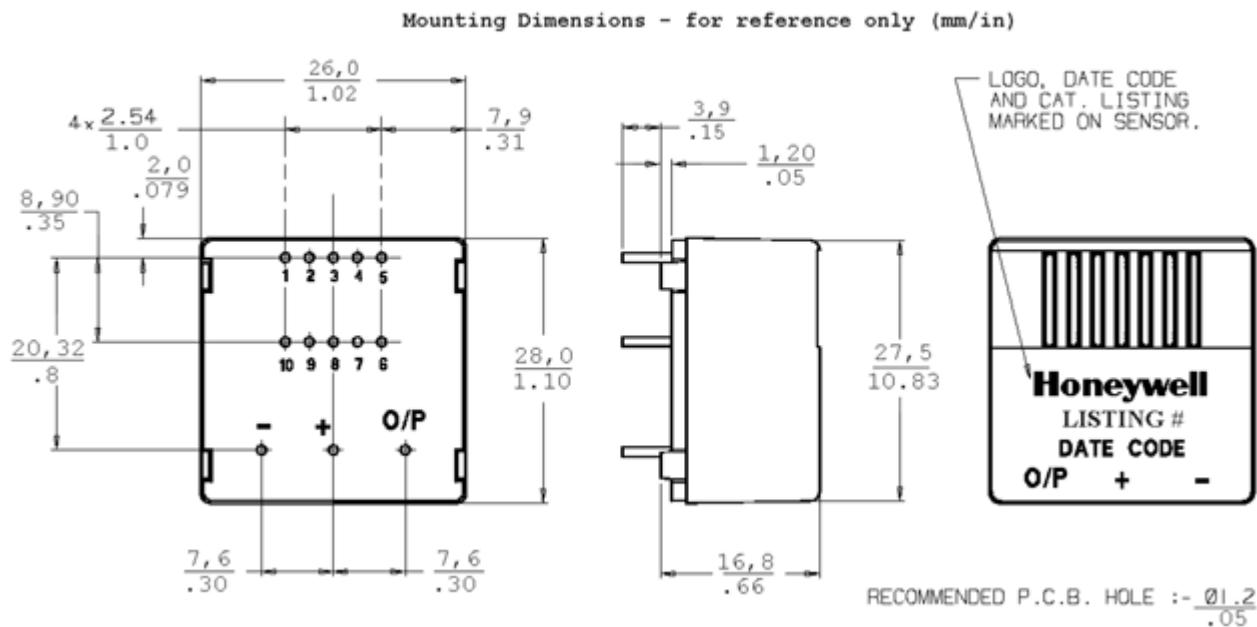
The CSN Series of closed loop current sensors are based on the principles of the Magnetoresistive or Hall effects, and the null balance or zero magnetic flux method (feedback system). The magnetic flux in the sensor core is constantly controlled at zero. The amount of current required to balance zero flux is the measure of the primary current flowing through the conductor, multiplied by the ratio of the primary to secondary windings. This closed loop current is the output from the device and presents an image of the primary current reduced by the number of secondary turns at any time. This current can be expressed as a voltage by passing it through a resistor.



CSNE151

CSN Series closed loop current sensor, measures AC, DC or impulse current, 25 amp-turns nominal, ± 36 amp-turns range, smaller housing, 1000 turn

Product Specifications	
Sensor Type	Closed Loop Linear
Sensed Current Type	ac or dc
Sensed Current Range	± 36 A
Package Style	Series Connect PCB Mount
Output Type	Current
Maximum Continuous Current	± 36 A
Supply Current	± 10 mA + output
Supply Voltage	± 15.0 Vdc
Offset Current	< ± 0.15 mA
Offset Current Drift	< ± 0.6 mA
Coil Resistance @ 70 °C	110 Ohm
Response Time	< 1 µs
Coil Turns	1000
Output Nominal	25 mA
Operating Temperature Range	0 °C to 70 °C [32 °F to 158 °F]
Storage Temperature Range	-40 °C to 90 °C [-40 °F to 194 °F]
Minimum Measuring Resistance	100 Ohm
Maximum Measuring Resistance	320 Ohm
Housing Material	Glass-filled PBT (UL94-V0)
Mounting	PCB on 13 pins
Pinout Style	5 pin
Accuracy	± 0.5 %
Availability	Global
Comment	Standard 25 A sensor with 5 integral primary turns.
UNSPSC Code	411121
UNSPSC Commodity	411121 Transducers
Series Name	CSN Series

Honeywell**CSNE151****CSN Series closed loop current sensor, measures AC, DC or impulse current, 25 amp-turns nominal, ± 36 amp-turns range, smaller housing, 1000 turn**



CSNE151

CSN Series closed loop current sensor, measures AC, DC or impulse current, 25 amp-turns nominal, ± 36 amp-turns range, smaller housing, 1000 turn

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalog) is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

© Copyright Honeywell Inc. 1998-2006 All rights reserved.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru