

#### Features


· Reverse-mount available type

# ●Size


3412 (1305) 3.4 × 1.25mm (t=1.1mm)




### Outline



## Dimensions

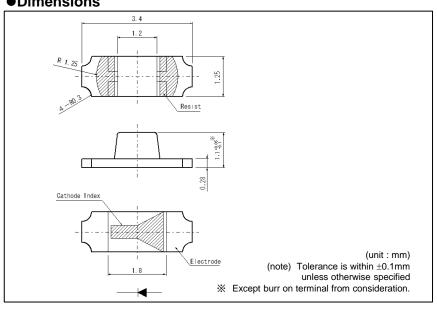

## Recommended Solder Pattern



# Specifications

				Abs	olute Max	kimum Ra	tings (Ta=25º0	C)			Electric	cal and	l Optica	al Chara	acteristi	ics (Ta	=25°C)		
Part No.	Chip	Emitting	Power	Forward	Peak Forward	Reverse	Operating Temp	Storage Temp.	Forward	Voltag V <sub>F</sub>	Reverse 0	Current I <sub>R</sub>	Domir	nant Wa	aveleng	jth λD	Lumino	ous Inte	nsity $I_V$
i dit ivo.	Structure		Dissipation			Voltage	Operating remp.	Otorage Temp.	Тур.	I <sub>F</sub>	Max.	$V_R$	Min.*3	Тур.	Max.*3	I <sub>F</sub>	Min.	Тур.	I <sub>F</sub>
			$P_D(mW)$	$I_F(mA)$	I <sub>FP</sub> (mA)	$V_R(V)$	Topr(°C)	Tstg(°C)	(V)	(mA)	(μA)	(V)	(nm)	(nm)	(nm)	(mA)	(mcd)	(mcd)	(mA)
SML-811VT(A)		Red											625	630	636				
SML-811UT(A)		Keu			100* <sup>2</sup>	5	-40 to +85	-40 to +100	1.95	10		5	615	620	625	10	11.2	22.4	10
SML-811DT(A)	AlGalnP	Orange	62	25	100	5	-40 to +65	-40 to +100	1.95	10	100	5	602	605	608	10			10
SML-811WT(A)		Yellow									100		587	590	593		14	28	
SML-812MT		Yellowish Green	65		60* <sup>1</sup>	4	-30 to +85	-40 to +85	2.1	20		4	569	572	575	20	14	40	20
SML812BCT	InGaN	Blue	80	20	100* <sup>2</sup>	5	-30 to +85	-40 to +85	3.3	20		5	464	470	476	20	22	56	20
☐ SML813WBC8W	IIIGain	White	33	10	50* <sup>2</sup>	<sub>*2</sub> 5	-40 to +85	85 -40 to +100	2.9	5	10	3	(0.	30, 0.3	30)	5	22	45	5

\*1:Duty1/5, 200Hz \*2:Duty1/10, 1kHz \*3:Reference

## • Electrical Characteristics Curves

Fig.1 Forward Current - Forward Voltages




Fig.2 Luminous Intensity -Atmosphere Temperature 1.6 RELATIVE LUMINOUS INTENSITY [a.u.]  $I_{E}=10mA$  $I_{E}^{\prime}=20\text{mA}$ 1.4 1.2 1 8.0 SML-811VT(A)
SML-811UT(A) 0.6 SML-811DT(A) SML-811WT(A) SML-812MT 0.4 -40-30-20-10 0 10 20 30 40 50 60 70 80 90100

ATMOSPHERE TEMPERATURE : Ta [°C]

Fig.3 Luminous Intensity - Forward Current





Fig.4 Derating



AMBIENT TEMPERATURE : Ta [°C]

## • Electrical Characteristics Curves

Fig.1 Forward Current - Forward Voltages




Fig.2 Luminous Intensity -Atmosphere Temperature 1.4 RELATIVE LUMINOUS INTENSITY [a.u.] I<sub>F</sub>=20mA 1.2 1 0.8 SML812BC7T 0.6 -20 20 40 60 80 100 -40

ATMOSPHERE TEMPERATURE : Ta [°C]

Fig.3 Luminous Intensity - Forward Current





Fig.4 Derating



\*The value is based on the die destruction endurance; optical characteristics are NOT considered..

# **•**Electrical Characteristics Curves

Fig.1 Forward Current - Forward Voltages





Fig.2 Luminous Intensity -Atmosphere Temperature



ATMOSPHERE TEMPERATURE : Ta [°C]

Fig.3 Luminous Intensity - Forward Current






Fig.4 Derating




AMBIENT TEMPERATURE: Ta [°C]

\*The value is based on the die destruction endurance; optical characteristics are NOT considered..

# Viewing Angle

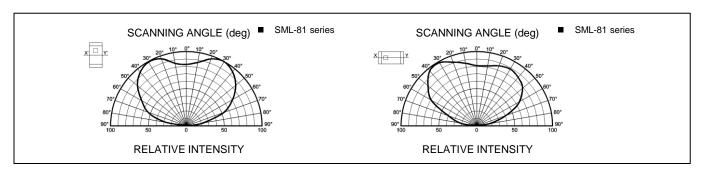

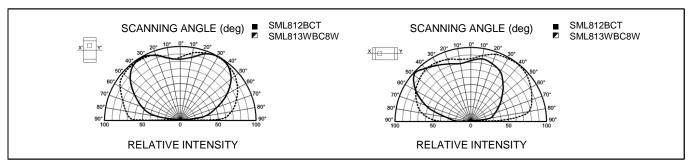

# •Rank Reference of Brightness

 $Red(V,U) \tag{Ta=25^{o}C, I_{F}=10mA}$ 

Rank	AG	AH	AJ	AK	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX
Iv (mcd)	9.0 to 11.2	11.2 to 14	14 to 18	18 to 22.4	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355
SML-811VT(A)*																
SML-811UT(A)*																

Orange(D) (Ta=25 $^{\circ}$ C, I<sub>F</sub>=10mA)

Rank	AG	AH	AJ	AK	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX
Iv (mcd)	9.0 to 11.2	11.2 to 14	14 to 18	18 to 22.4	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355
SML-811DT(A)*																

Yellow(Y) (Ta=25°C, I<sub>F</sub>=10mA)

Rank	AG	AH	AJ	AK	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX
Iv (mcd)	9.0 to 11.2	11.2 to 14	14 to 18	18 to 22.4	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355
SML-811WT(A)*																

Rank	G	Н	J	K	L	M	N	Р	Q	R	S	T	U	V	W	X
Iv (mcd)	1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600
SML-812MT <sup>*</sup>																

 $\mathsf{Blue}(\mathsf{B}) \tag{Ta=25^{\circ}C, \, \mathsf{I}_{\mathsf{F}}=20\mathsf{mA})}$ 

	Rank	G	Η	J	K	L	М	Ν	Р	Q	R	S	Т	U	٧	W	Χ
	Iv (mcd)	0.9 to 1.4	1.4 to 2.2	2.2 to 3.6	3.6 to 5.6	5.6 to 9	9 to 14	14 to 22	22 to 36	36 to 56	56 to 90	90 to 140	140 to 220	220 to 360	360 to 560	560 to 900	900 to 1400
SI	ML812BCT																

White(WB)

 $(Ta=25^{\circ}C, I_F=5mA)$ 


Rank	G	Н	J	K	L	М	N	Р	Q	R	S	Т	U	V	W	Χ
Iv (mcd)	0.9 to 1.4	1.4 to 2.2	2.2 to 3.6	3.6 to 5.6	5.6 to 9	9 to 14	14 to 22	22 to 36	36 to 56	56 to 90	90 to 140	140 to 220	220 to 360	360 to 560	560 to 900	900 to 1400
SML813WBC8W																

\*Please note that the brightness of some products may fall between ranks (half rank).

\*\*Brightness on specification sheet include tolerance of within ±10%.




# ●Spectrum Data

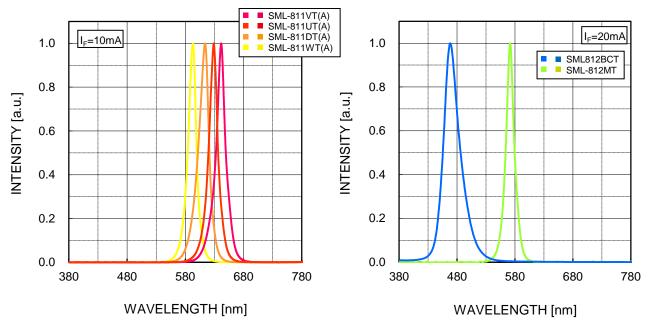

<sup>\*</sup> Please take this data as a reference data for the samples are measured randomly.

<sup>\*</sup> The data is relativized for each color. It is NOT to show the spectrum peaks are equal.

# **Chromaticity Diagram**





# [Chromaticity Coordinates] (Ta=25°C, I<sub>F</sub>=5mA)

,	4	I	F	ŀ	1	ŀ	<
Х	у	Х	у	Х	у	Х	у
0.280	0.248	0.283	0.305	0.287	0.295	0.304	0.330
0.296	0.276	0.304	0.330	0.307	0.315	0.330	0.360
0.283	0.305	0.307	0.315	0.311	0.294	0.330	0.318
0.264	0.267	0.287	0.295	0.296	0.276	0.311	0.294


Measurement tolerance :  $\pm 0.02$ 

# ●Taping [T86 / 1(white)]

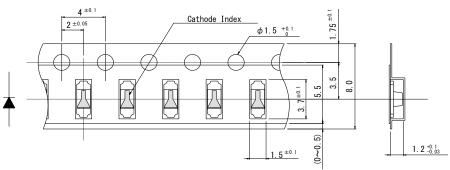

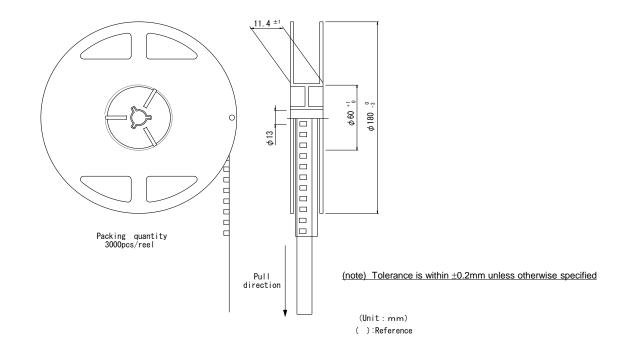

## ●Part No. Construction

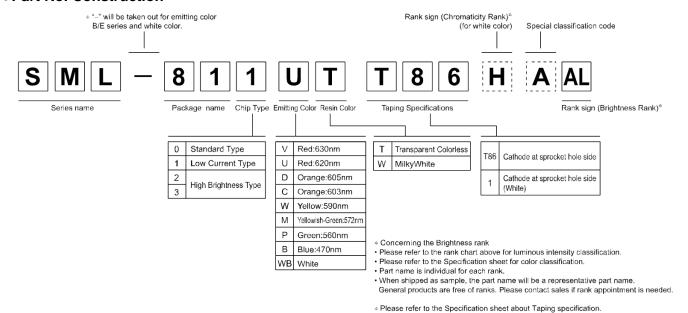

## Packing Specification

ROHM LED products are being shipped with desiccant (silica gel) concluded in moisture-proof bags.

Pasting the moisture sensitive label on the outer surface of the moisture-proof bags or enclosing the humidity indication card inside the bag is available upon request.

Please contact the nearest sales office or distributer if necessary.

# Precaution (Surface Mount Device)

#### 1.Storage

If the product is heated during the reflow under the condition of hygroscopic state, it may vaporize and expand which will influence the performance of the product. Therefore, the package is waterproof. Please use the product following the conditions:

#### Using Conditions

Classification	Temperature	Humidity	Expiration Date	Remark
①Before using	5 to 30°C	30 to 70%RH	Within 1 year from Receiving	Storage with waterproof package
②After opening package	5 to 30°C	Below 70%RH		Please storing in the airtight container with our desiccant (silica gel)

#### Baking

Bake the product in case of below:

- 1) The expiration date is passed.
- The color of indicator (silica gel) turned from blue to colorless or from green to pink.

(Even if the product is within the expiration date.)

#### Baking Conditions

Tempe	erature	Time	Humidity
60±	:3°C	12 to 24h	Below 20%RH
Remark	Bake products     Reel and emb apply stress c     Recommend by	ossed tape are easy to be deformed on it.	when baking, so please try not to

## 2.Application Methods

## 2-1. Precaution for Drive System and Off Mode

Design the circuit without the electric load exceeding the ABSOLUTE MAXIMUM RATING that applies on the products. If drive by constant voltage, it may cause current deviation of the LED and result in deviation of luminous intensity, so we recommend to drive by constant current. (Deviation of VF Value will cause deviation of current in LED.) Furthermore, for off mode, please do not apply voltage neither forward nor reverse. Especially, for the products with the Ag-paste used in the die bonding, there's high possibility to cause electro migration and result in function failure.

#### 2-2. Operation Life Span

There's possibility for intensity of light drop according to working conditions and environments (applied current, surrounding temperature and humidity, corrosive gases), please call our Sales staffs for inquiries about the concerned application below.

- ①Longtime intensity of light life
- ②On mode all the time

## 2-3.Applied Stress on Product

The top of the LED is very soft, which the silicon resin is used as sealing resin. Therefore, please pay attention to the overstress on it which may influence its reliability.

#### 2-4.Usage

The Product is LED. We are not responsible for the usage as the diode such as Protection Chip, Rectifier, Switching and so on.



**SML-81 Series** 

#### 3. Others

#### 3-1. Surrounding Gas

Notice that if it is stored under the condition of acid gas (chlorine gas, sulfured gas) or alkali gas (ammonia), it may result in low soldering ability (caused by the change in quality of the plating surface) or optical characteristics changes (light intensity, chrominance) and change in quality of die bonding (Ag-paste) materials. All of the above will cause function failure of the products.

Therefore, please pay attention to the storage environment for mounted product (concern the generated gas of the surrounding parts of the products and the atmospheric environment).

#### 3-2. Electrostatic Damage

The product is part of semiconductor and electrostatic sensitive, there's high possibility to be damaged by the electrostatic discharge. Please take appropriate measures to avoid the static electricity from human body and earthing of production equipment. The resistance values of electrostatic discharge (actual values) vary with products, therefore, please call our Sales staffs for inquiries.

#### 3-3. Electromagnetic Wave

Please concern the influence on LED in case of application with strong electromagnetic wave such as IH (Induction heating).

## 4.Mounting

## 4-1. Soldering

- No resin hardening agent such as filler is used in the sealing resin of the product. Therefore, resin expansion and moisture absorption at humidity will cause heat stress during soldering process and finally has bad influence on the product's reliability.
- The product is not for flow soldering.
- Do not expose the product in the environment of high temperature (over 100°C) or rapid temperature shift (within 3°C of temperature gradient) during the flow soldering of surrounding parts.
- Please set appropriate reflow temperature based on our product usage conditions and specification.
- The max for reflowing is 2 times, please finish the second flow soldering and flow soldering with other parts within the usage limitation after open the moisture proof package.
- Compare with N2 reflow, during air reflow, because of the heat and surrounding conditions, it may cause the discoloration of the resin.
- For our product that has no solder resist, because of its solder amount and soldering conditions, one of its specific characteristics is that solder will penetrate into LED. Thus, there's high possibility that will influence its reliability. Therefore, please be informed, concerning it before using it.

#### 4-2. Automatic Mounting

# 4-2-1.Silicon Resin Sealing Product

The sealing resin of LED is very soft, so please select adsorption nozzle that would not apply stress directly on the sealing section.

## 4-2-2.Mini Package (Smaller than 1608 size)

Vibration may result in low mounting rate since it will cause the static electricity of product and adhere to top cover tape. We recommend to

- set magnet on parts feeder cassette of the mounter to control the product stabilization
- · set ionizer to prevent electrostatic charge


#### 4-3. Mounting Location

The stress like bending stress of circuit board dividing after mounting, may cause LED package crack or damage of LED internal junction, therefore, please concern the mounting direction and position to avoid bending or screwing with great stress of the circuit board.



#### 4-4. Mechanical Stress after Mounting

The mechanical stress may damage the LED after Circuit Mounting, so please pay attention to the touch on product.




Stress strength according to the mounting position: A>B>C>D

## 4-5. Soldering Pattern for Recommendation

We recommend the soldering pattern that shows on the right. It will be different according to mounting situation of circuit board, herefore, please concern before designing.

\*The product has adopted the electrode structure that it should solder with back electrode of the product. Thus, please be informed that the shape of electrode pin of solder fillet formation is not guaranteed.




#### 4-6. Reflow Profile

For reflow profile, please refer to the conditions below:(\*)

· Meaning of marks, Conditions

	,	
Mark	Meanings	Conditions
Ts <sub>max</sub>	Maximum of pre-heating temperature	180°C
Ts <sub>min</sub>	Minimum of pre-heating temperature	140°C
Ts	Time from Ts <sub>min</sub> to Ts <sub>max</sub>	Over 60sec.
T <sub>L</sub>	Reference temperature	230 to 260°C
t <sub>L</sub>	Retention time for T <sub>L</sub>	Within 40sec.
T <sub>P</sub>	Peak temperature	260°C(Max)
t <sub>P</sub>	Time for peak temperature	Within 10sec.
$\Delta T_R/\Delta t$	Temperature rising rate	Under 3°C/sec.
$\Delta T_D/\Delta t$	Temperature decreasing rate	Over -3°C/sec.



\*Above conditions are for reference. Therefore, evaluate by customer's own circuit boards and reflow furnaces before using, because stress from circuit boards and temperature variations of reflow furnaces vary by customer's own conditions.

#### 4-7. Cleaning after Soldering

Please follow the conditions below if the cleaning is necessary after soldering.

Solvent	We recommend to use alcohols solvent such as, isopropyl alcohols
Temperature	Under 30°C within 3 minutes
Ultrasonic Cleaning	15W / Below 1 liter (capacity of tank)
Drying	Under 100°C within 3 minutes

# Notes

- 1) The information contained herein is subject to change without notice.
- Before you use our Products, please contact our sales representative and verify the latest specifications:
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative: transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

# ROHM Customer Support System

http://www.rohm.com/contact/

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# **ROHM Semiconductor:**

<u>SML-811UTT86A</u> <u>SML-811WTT86A</u> <u>SML-812MTT86</u> <u>SML812BCTT86</u> <u>SML-811DTT86A</u> <u>SML813WBC8W1</u> SML813BC8TT86 SML-811VTT86A



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

#### Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru