

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 501)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOPLASTIC UL94V0

-CONTACT MATERIAL: BRASS
GOLD OVER NICKEL

-ACCESSORIES: BRASS,cadmium plated yellow passivation

-SHELLS: STEEL,cadmium plated yellow passivation

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 7.5A

-CONTACT RESISTANCE: <= 7.3 m ohms

-CONTACT/CONTACT : >=1000 V

-CONTACT/GROUND : >=1200 V

-INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/56

TEMPERATURE RANGE -55°C TO +125°C

DAMP HEAT STEADY STATE 56 DAYS

SALT SPRAY 48 HOURS

MECHANICAL CHARACTERISTICS

- RETENTION AGAINST TORQUE: - Threaded insert: 0.7 N.m minimum

- Female screw : 0.5 N.m minimum

Series

DBML25P043

Shell size: E A B C D
see sheet 2

Front accessory definition
see sheet 2

Blank :without accessory
F :floating mounting
L :threaded insert M3
O :threaded insert UNC 4-40
V :female screw UNC 4-40

Contact number (see sheet 2)



9,15,25,37,50

Contacts


P :Pin

Plating

Blank :solder bucket 500 matings/unmatings
043 :solder bucket 500 matings/unmatings
for harsh environment

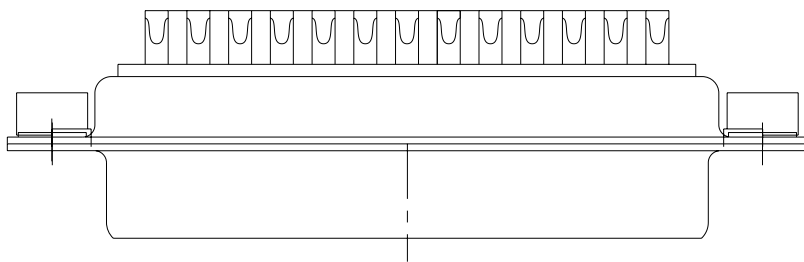

25 WAY for Example

www.fciconnect.com				surface - ☒ ISO 1302		tolerance std ISO 406 ISO 1101		projection 			
				TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	M PESSON	2006/11/14		ANGULAR	LINEAR	0.X ±0.3		size A2	Scale 2:1		
Eng	P LEGARE	2006/11/14				0.XX ±0.1					
Chr	P LEGARE	2006/11/14				0.XXX ±0.05					
Appr	P LEGARE	2006/11/14		0° ±2°				ECN		LS08-0044	
				Product family				-		Spec ref	
				title SUB MALE DM HE50I series		dwg no C01-8637-1737		Rev. C			
				with solder bucket							
				catalog no		-		CUSTOMER		sheet 1 of 4	
rev	ecn no	dr	date								
A	LS06-0174	MPE	2006/11/14								
B	LS07-0273	MPE	2007/10/30								
C	LS08-0044	MPE	2008/02/04								
-	-	-									
-	-	-									
-	-	-									
-	-	-									


CROSS REFERENCES HE501 and FCI		
HE501 P/N	FCI P/N	FRONT ACCESSORY
HE501NxxAS	D*MxxP	without
HE501FxxAS	D*MFxxP	floating mounting


PART NUMBER	FRONT ACCESSORY
D*MxxP043	without
D*MFxxP043	floating mounting
D*MLxxP043	insert M3
D*MOxxP043	insert UNC 4.40
D*MVxxP043	female screw UNC 4.40

PART NUMBER	FRONT ACCESSORY
D*MxxP	without
D*MFxxP	floating mounting
D*MLxxP	insert M3
D*MOxxP	insert UNC 4.40
D*MVxxP	female screw UNC 4.40


shell size	Contact number
*	XX
E	09
A	15
B	25
C	37
D	50

SCALE: 4

www.fciconnect.com			surface - 		tolerance std ISO 1302 ISO 406 ISO 1101		projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED										
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X	±0.3	size A2	Scale 2:1		
Eng	P LEGARE	2006/11/14			0.XX	±0.1				
Chr	P LEGARE	2006/11/14			0.XXX	±0.05				
Appr	P LEGARE	2006/11/14	Product family				-	Spec ref		
			SUB MALE DM HE501 series			dwg no		C01-8637-1737		Rev.
			with solder bucket							C
			catalog no			-	CUSTOMER		sheet 2 of 4	

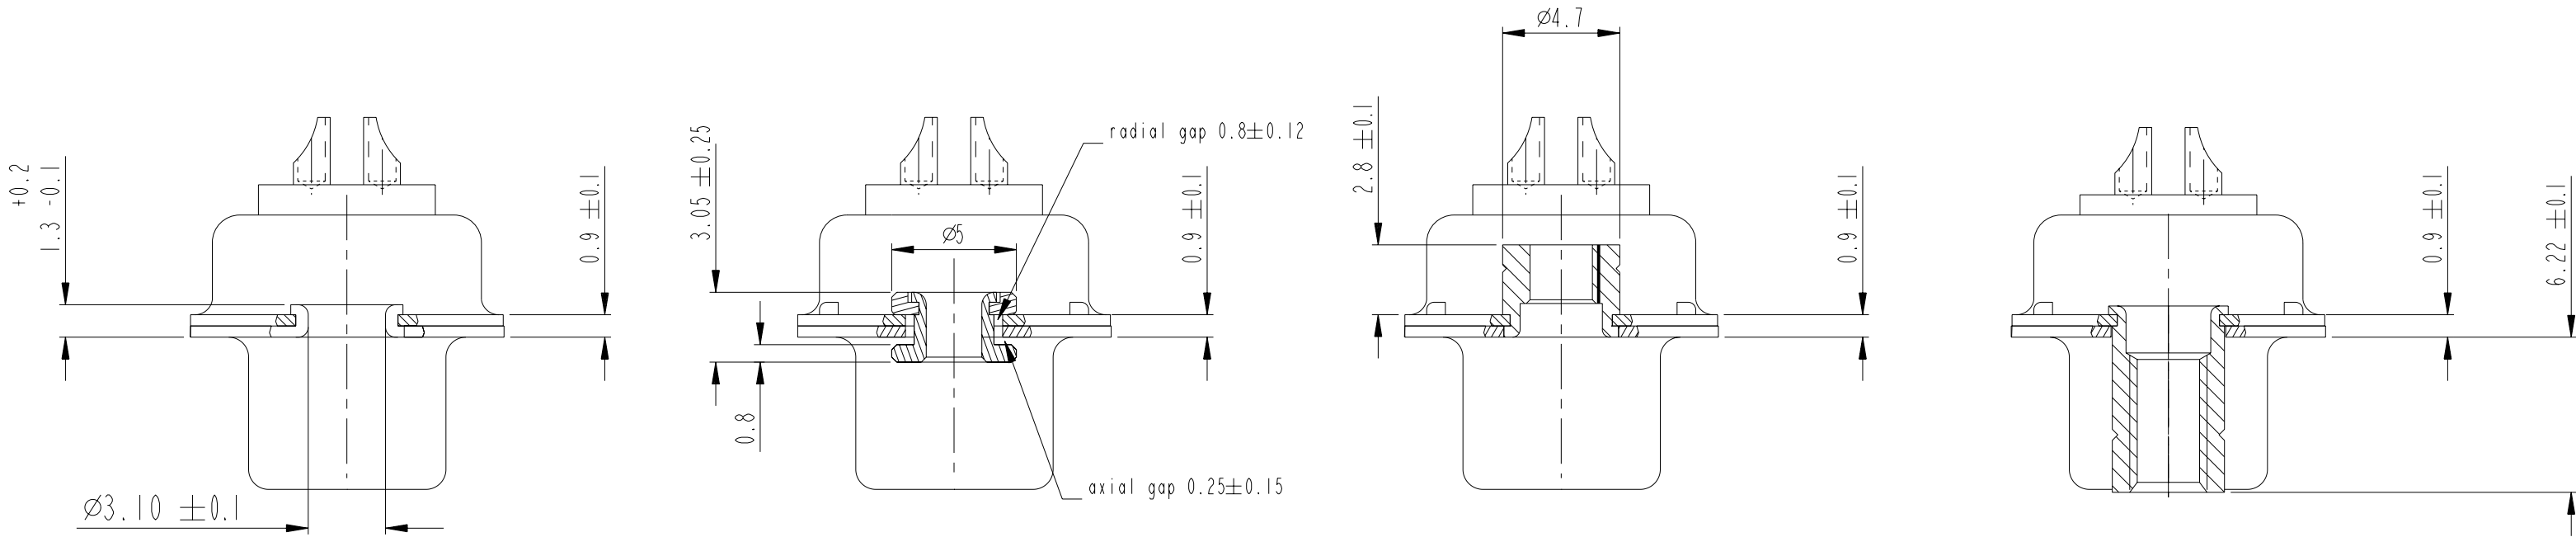


FRONT ACCESSORY	Blank without	F floating mounting	L insert M3 O insert UNC 4.40	V female screw UNC 4.40
-----------------	---------------	---------------------	----------------------------------	-------------------------

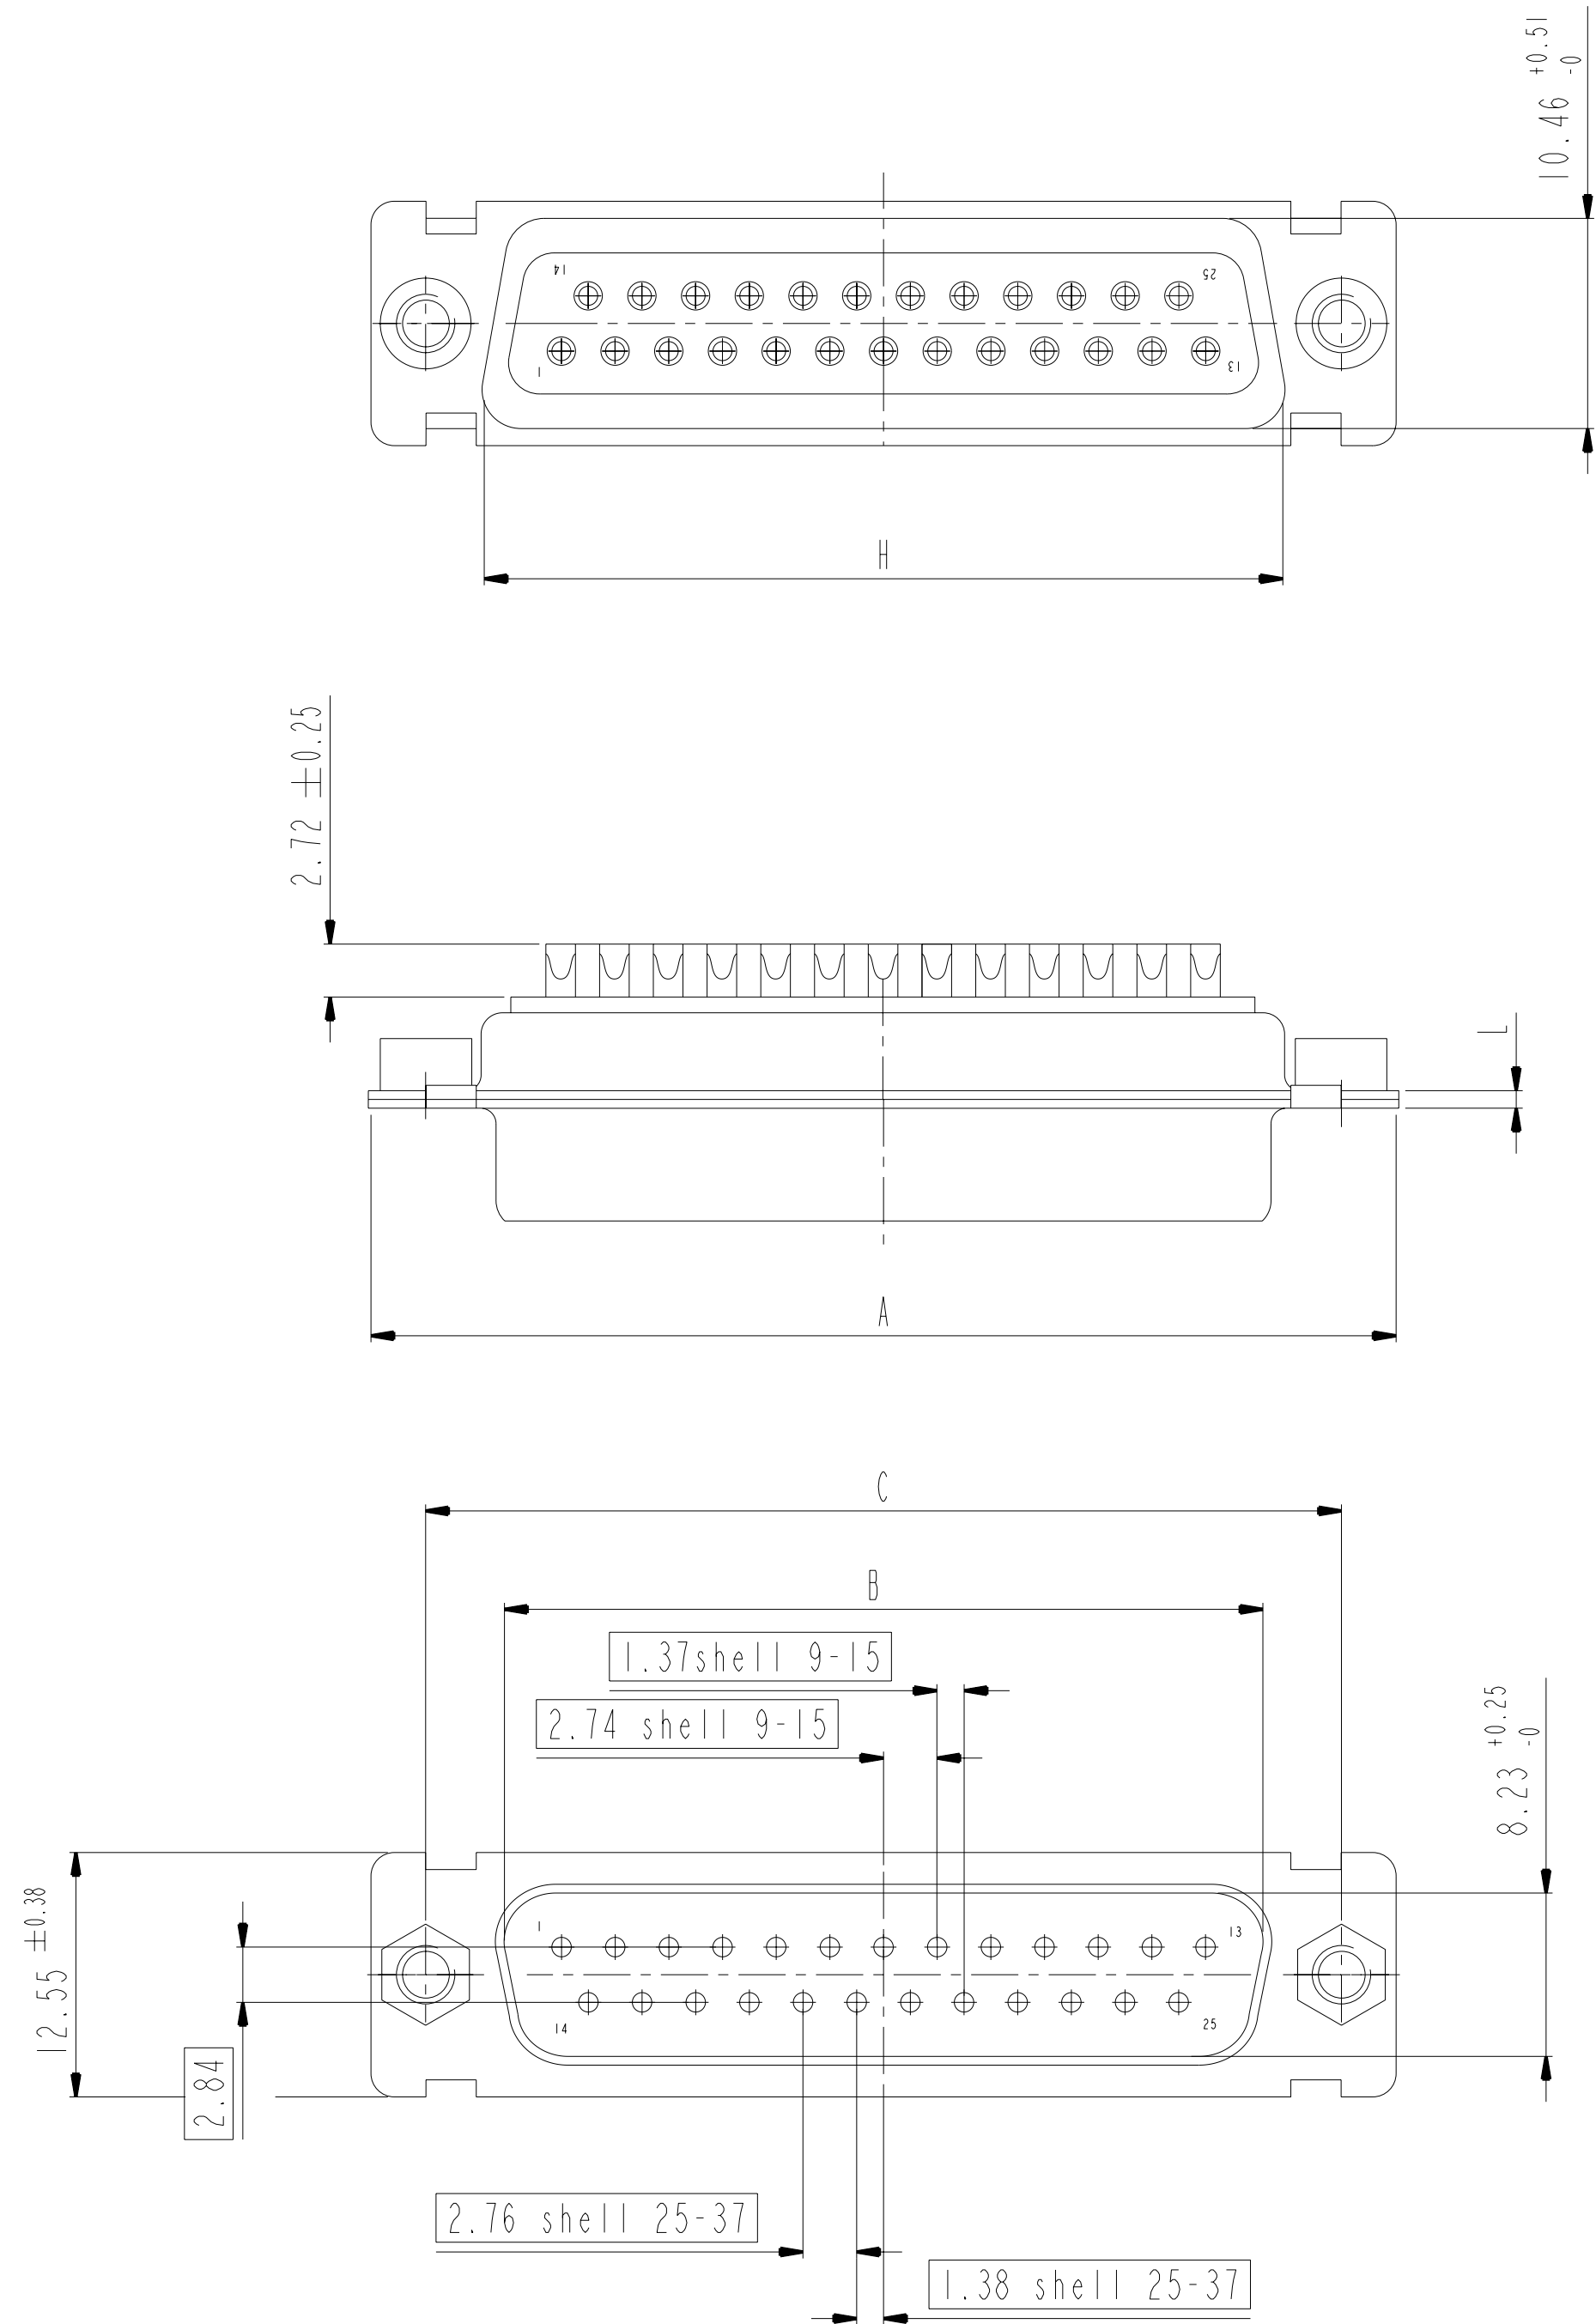

DIMENSIONS FOR SHELL E,A,B,C

Dimensions are in millimeters



Shell size	Number of contacts	A $\begin{smallmatrix} +0.76 \\ -0 \end{smallmatrix}$	B $\begin{smallmatrix} +0.25 \\ -0 \end{smallmatrix}$	C ± 0.12	F $\begin{smallmatrix} +0.57 \\ -0 \end{smallmatrix}$	G $\begin{smallmatrix} +0.25 \\ -0 \end{smallmatrix}$	H $\begin{smallmatrix} +0.51 \\ -0 \end{smallmatrix}$	L $\begin{smallmatrix} +0.22 \\ -0 \end{smallmatrix}$
E	09	30.43	16.79	24.99	10.47	5.9 $\begin{smallmatrix} +0.15 \\ -0 \end{smallmatrix}$	19.02	0.80
A	15	38.76	25.12	33.32	10.47	5.9 $\begin{smallmatrix} +0.15 \\ -0 \end{smallmatrix}$	27.25	0.80
B	25	52.65	38.84	47.04	10.43	5.7 $\begin{smallmatrix} +0.25 \\ -0 \end{smallmatrix}$	41.02	0.80
C	37	68.94	55.30	63.50	10.56	5.7 $\begin{smallmatrix} +0.25 \\ -0 \end{smallmatrix}$	57.45	0.90

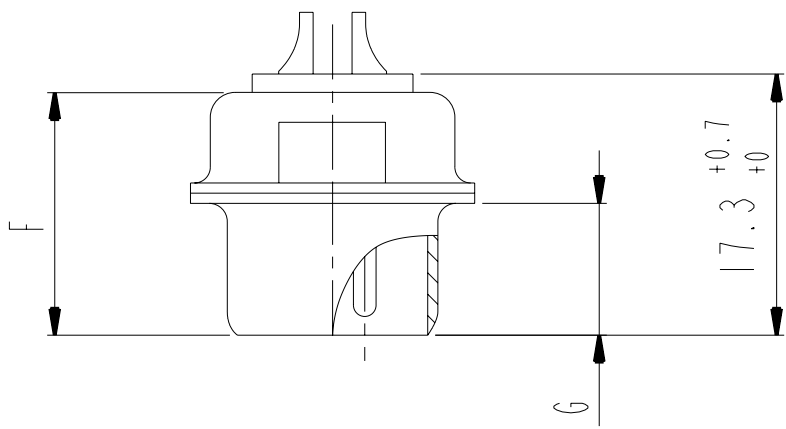

scale 3

www.fciconnect.com			surface - 		tolerance std		projection		mm		
			ISO 1302		ISO 406 ISO 1101						
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X		±0.3		size	A2	Scale 2:1
Eng	P LEGARE	2006/11/14			0.XX		±0.1				
Chr	P LEGARE	2006/11/14			0.XXX		±0.05				
Appr	P LEGARE	2006/11/14	0° ±2°						ECN		LS08-0044
			Product family				-		Spec ref		
			SUB MALE DM HE501 series				C01-8637-1737		Rev.		
			with solder bucket						C		
catalog no			-				CUSTOMER		sheet 3 of 4		

DIMENSIONS FOR SHELL SIZE D (50 CONTACTS)

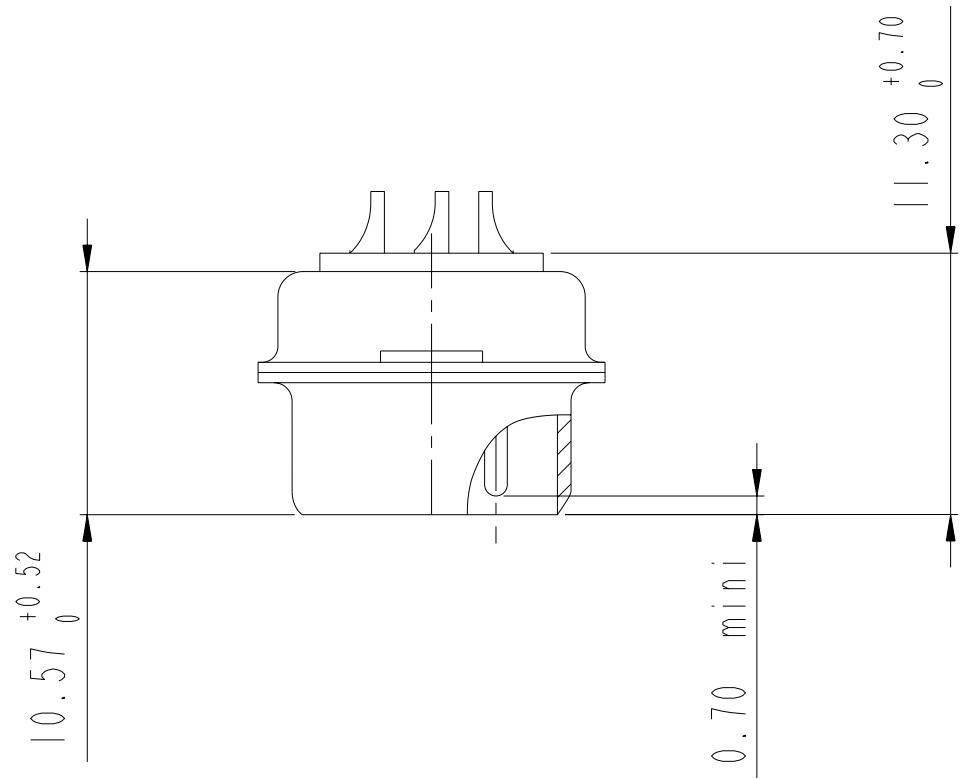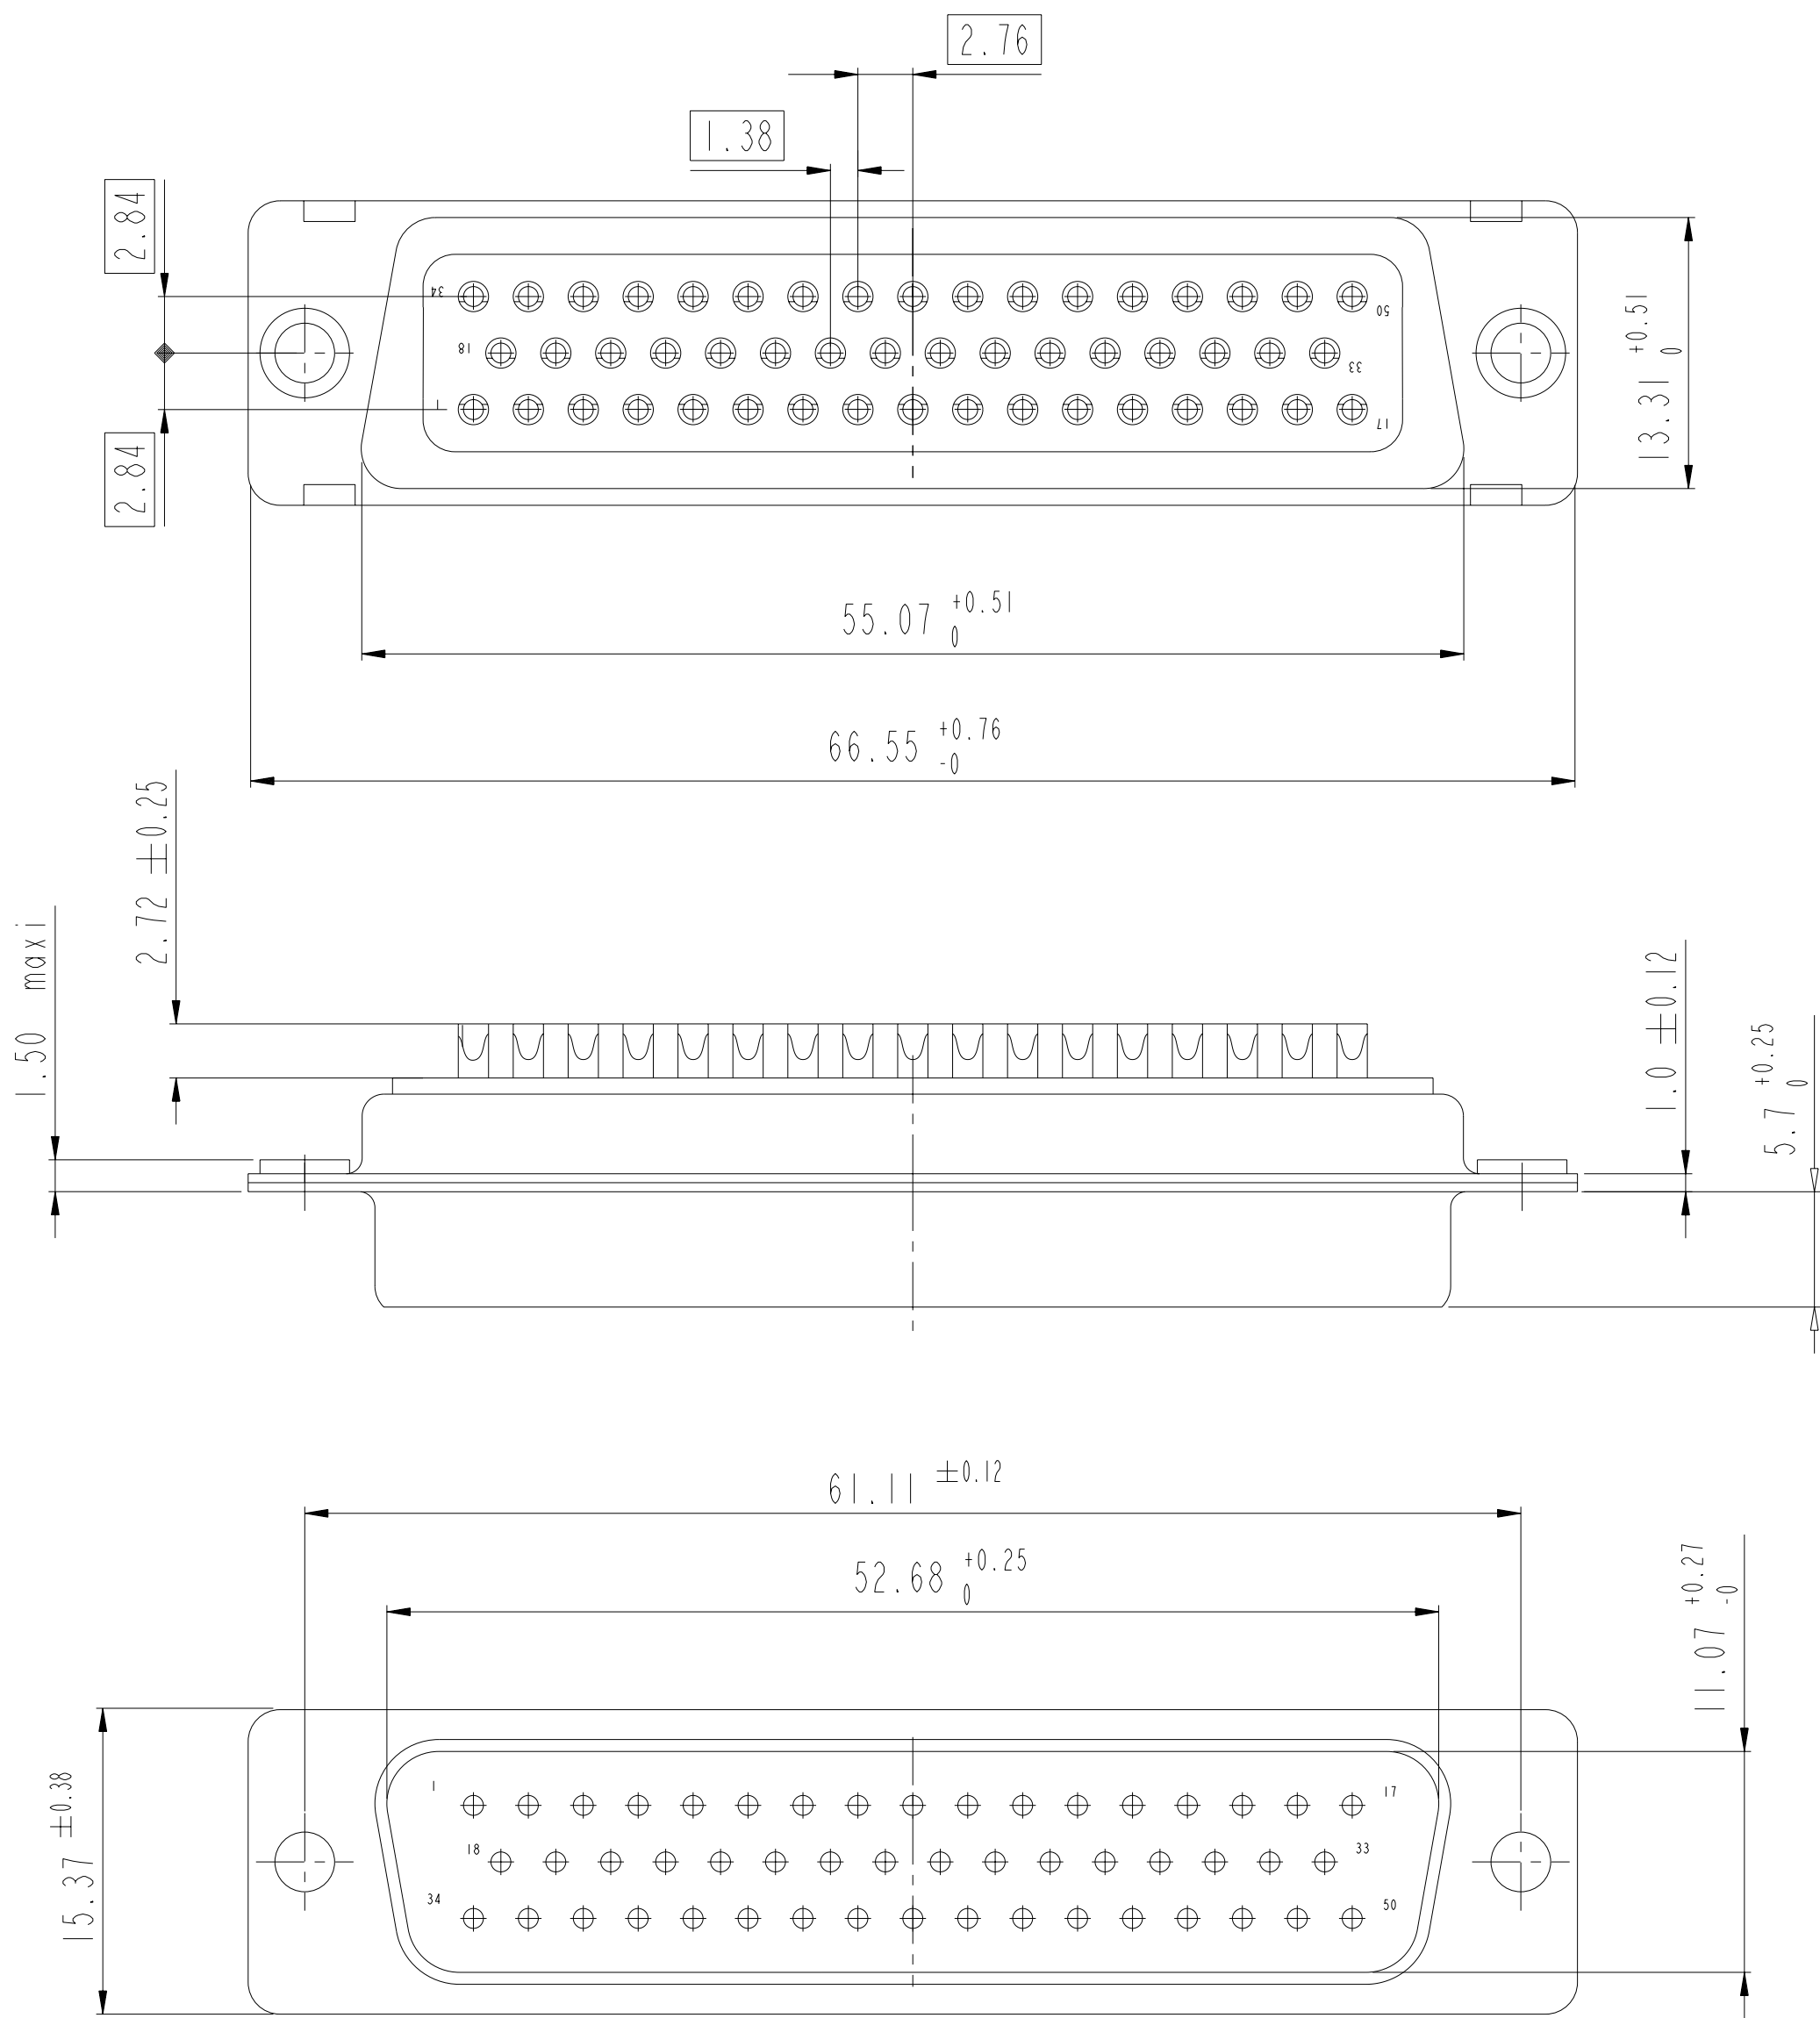

scale 3

www.fciconnect.com			surface ☒ ISO 1302		tolerance std ISO 406 ISO 1101		projection		mm		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X ±0.3		size A2	Scale 2:1			
Eng	P LEGARE	2006/11/14			0.XX ±0.1						
Chr	P LEGARE	2006/11/14			0.XXX ±0.05						
Appr	P LEGARE	2006/11/14	Product family		- Spec ref						
			SUB MALE DM HE501 series				dwg no C01-8637-1737		Rev. C		
			with solder bucket				CUSTOMER		sheet 4 of 4		
			catalog no								

PDS: Rev: C

STATUS: Released

Printed: 31/10/2015

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru