
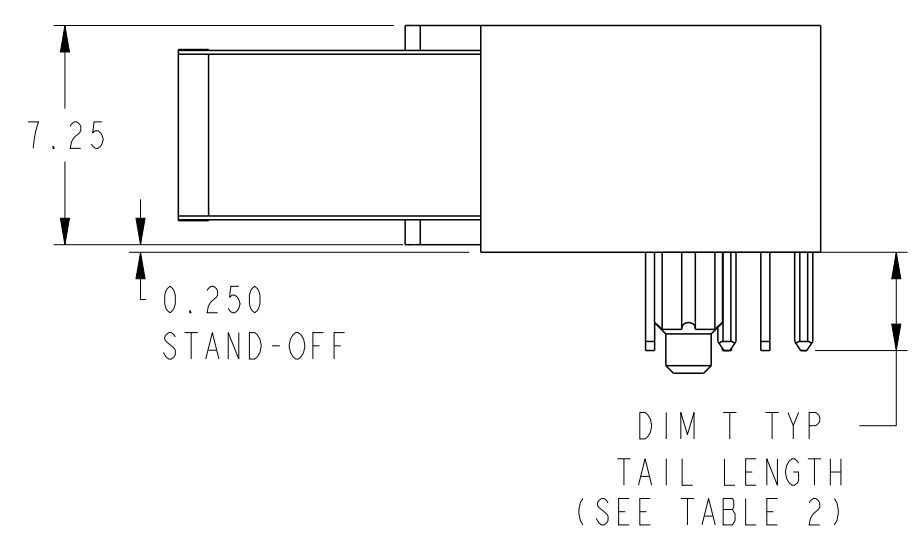
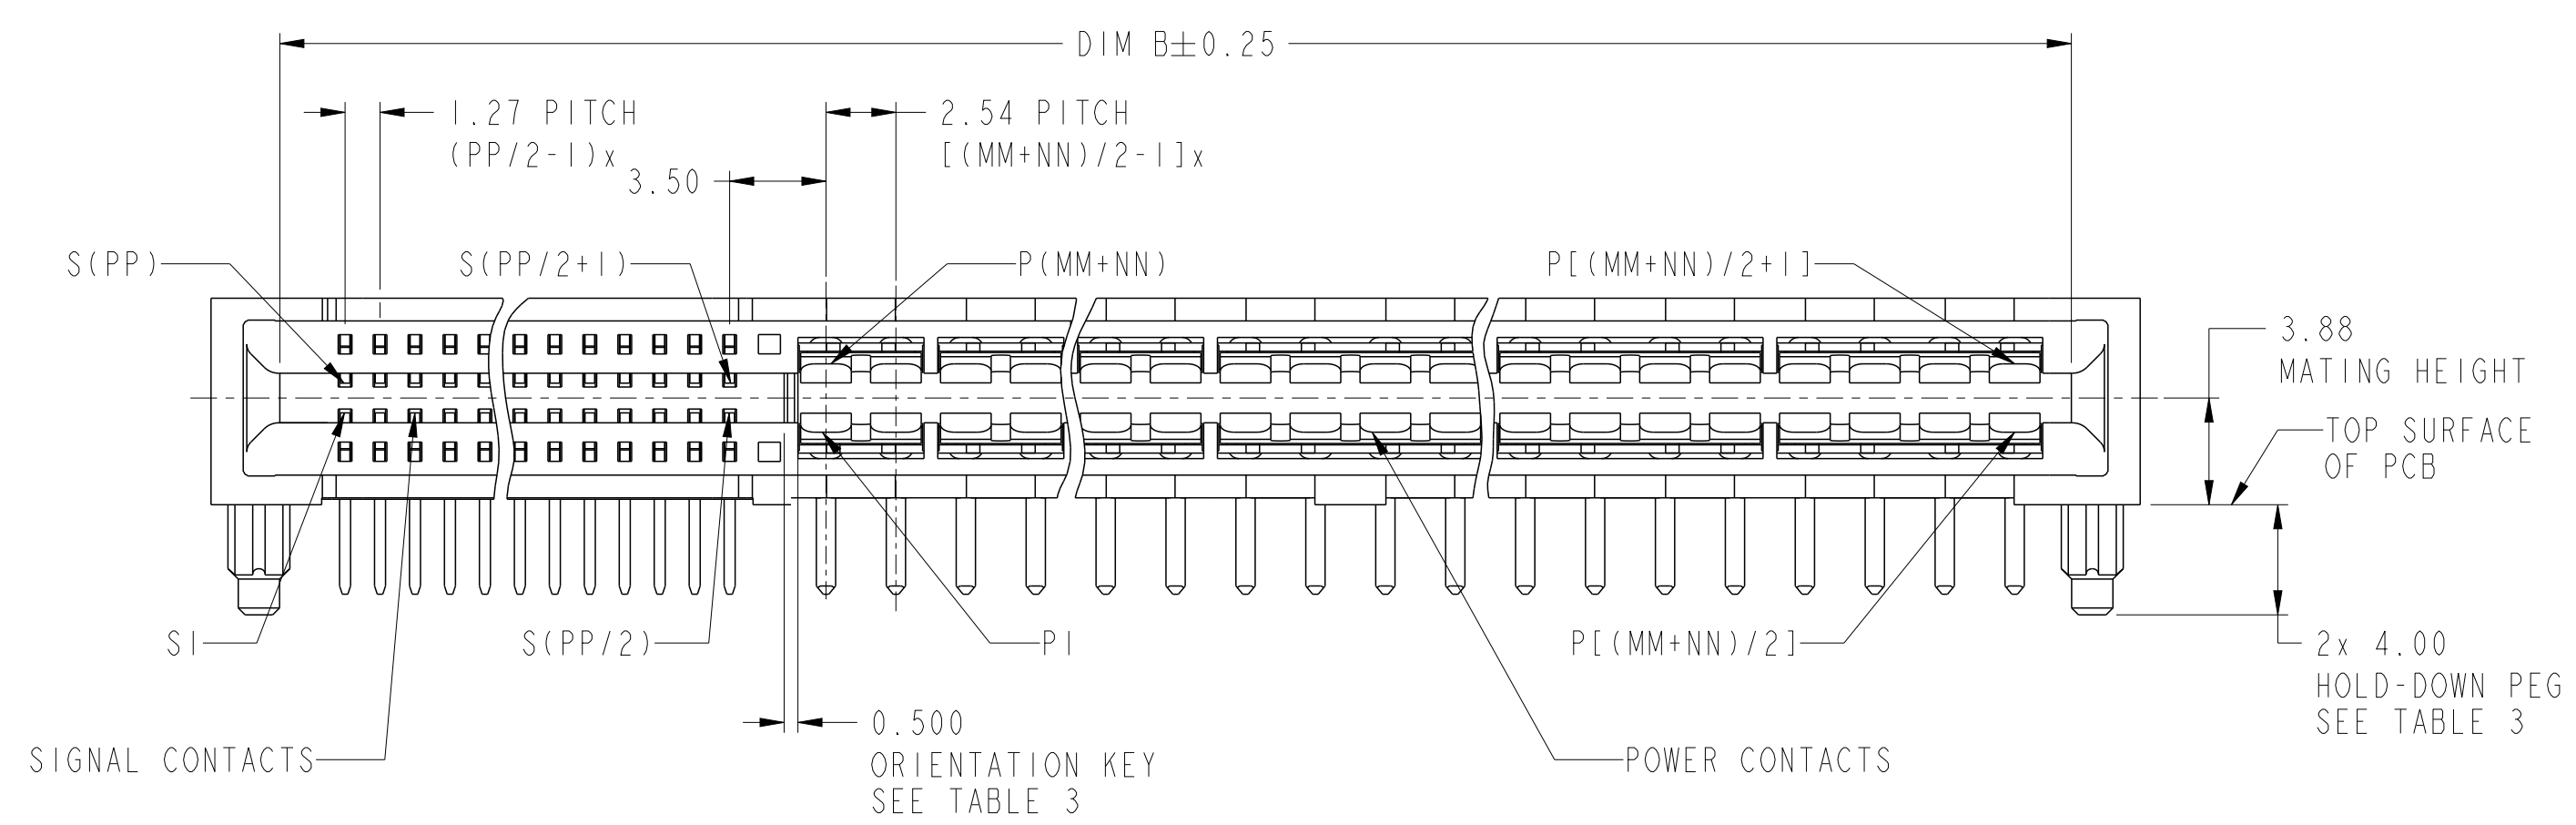
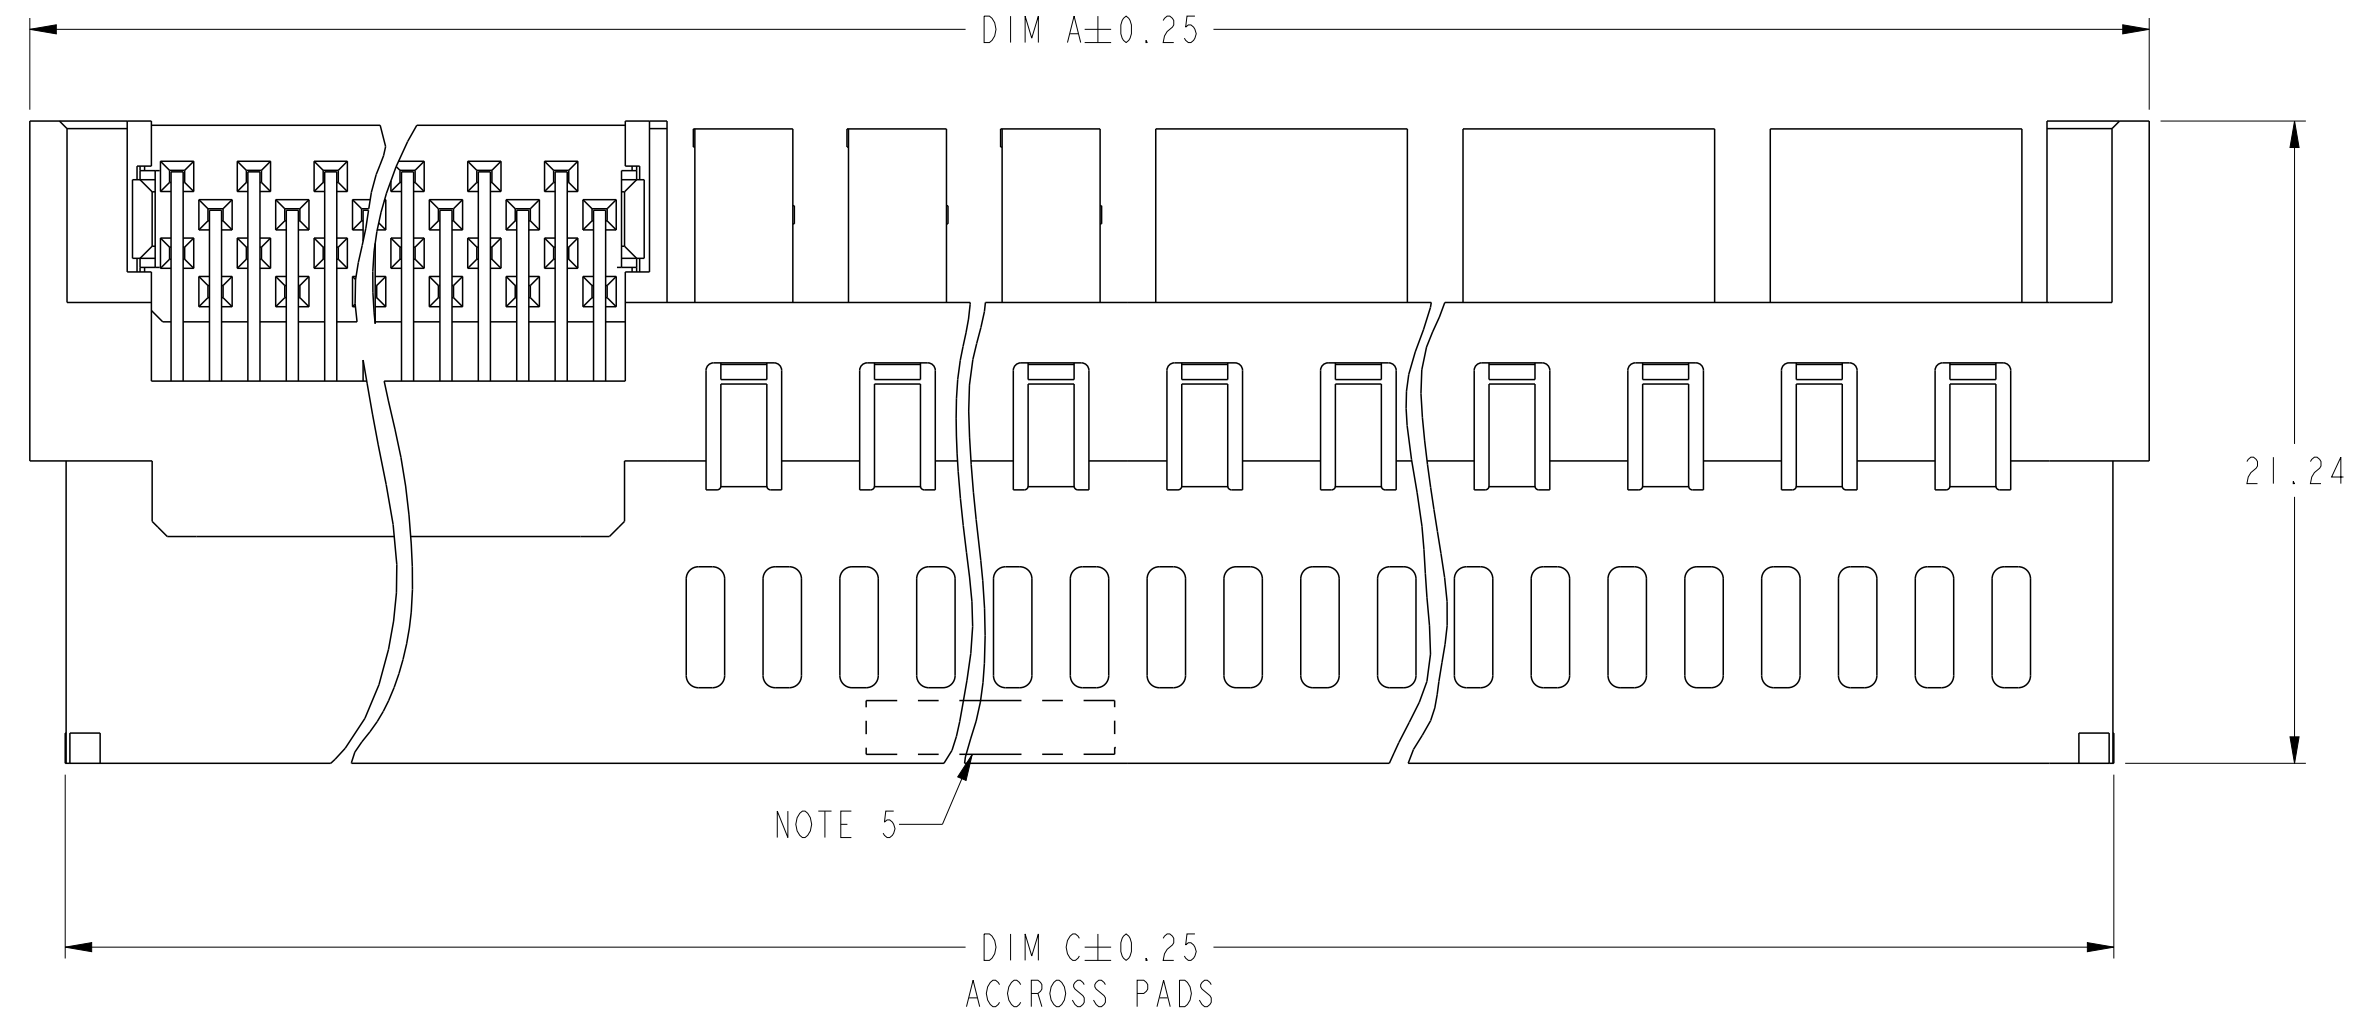





spec ref		-		dr		Hai-Ling Liu		2014/07/23		projection		MM		size		A2		scale		4:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Sunny2 Liu		2016/05/06						ecn no		ELX-DG-24036-1							
ISO 406		chr		Terris Liu		2016/05/20		rel level						Released									
ISO 1101		appr		Pei-Ming Zheng		2016/05/24		product family															
surface		linear		0.X		±0.5		Amphenol FCI		title		R/A REC S+P STANDARD		dwg no		10131077		rev		C			
				0.XX		±0.25																HIGH POWER CARD EDGE - UNIVERSAL	
				0.XXX		±0.10																	
ISO 1302		angular		0°		±2°		cat. no.		Product - Customer Drw		sheet 1 of 4											

Printed: May 24, 2016

10131077 - MM NN PP

LF LEAD FREE

PP

NN

MM


SIGNAL CONTACT QTY

2 BEAM PWR QTY
(NEXT TO SIGNAL)


4 BEAM PWR QTY
(NEXT TO RIGHT END)

	A	B	C	D	E	F	G	H
Tail Length(DIM T)	2.6	2.6	2.6	2.6	3.25	3.25	3.25	3.25
Orientation Key	Y	N	N	Y	Y	N	N	Y
Hold Down Option	Y	Y	N	N	Y	Y	N	N

J	K	L	M
4.05	4.05	4.05	4.05
Y	N	N	Y
Y	Y	N	N

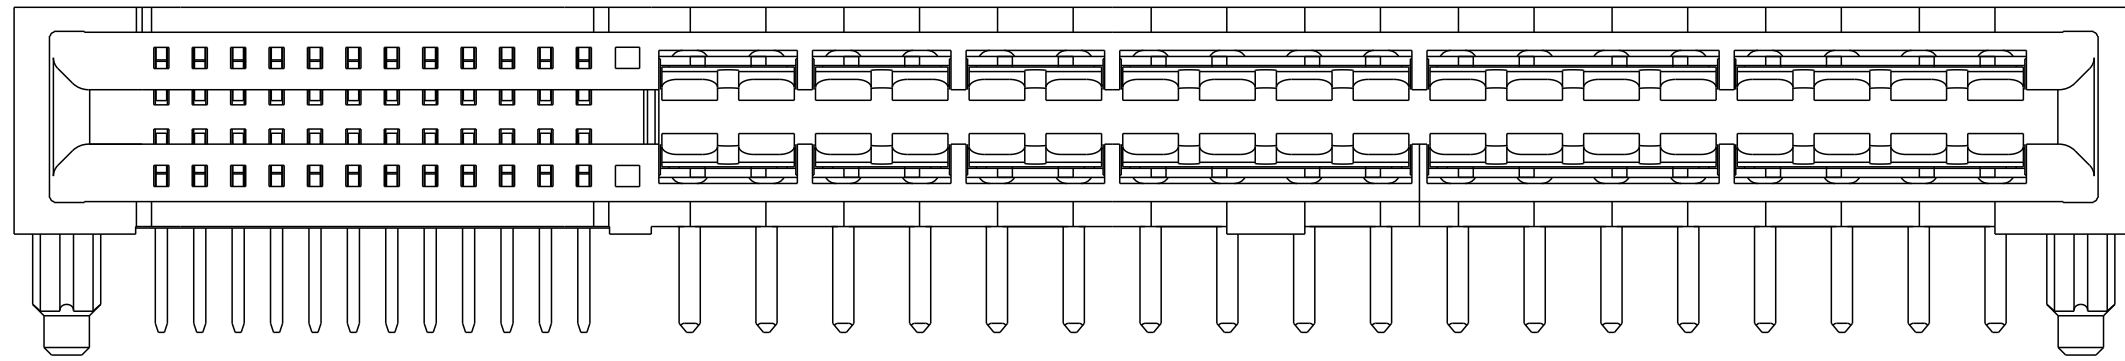

Example: The Configuration above is 10131077-241224ELF
R/A RECEPTACLE 24S36P with Orientation Key and Hold Down.
24P is 4 beam contacts, 12P is 2 beam contacts.

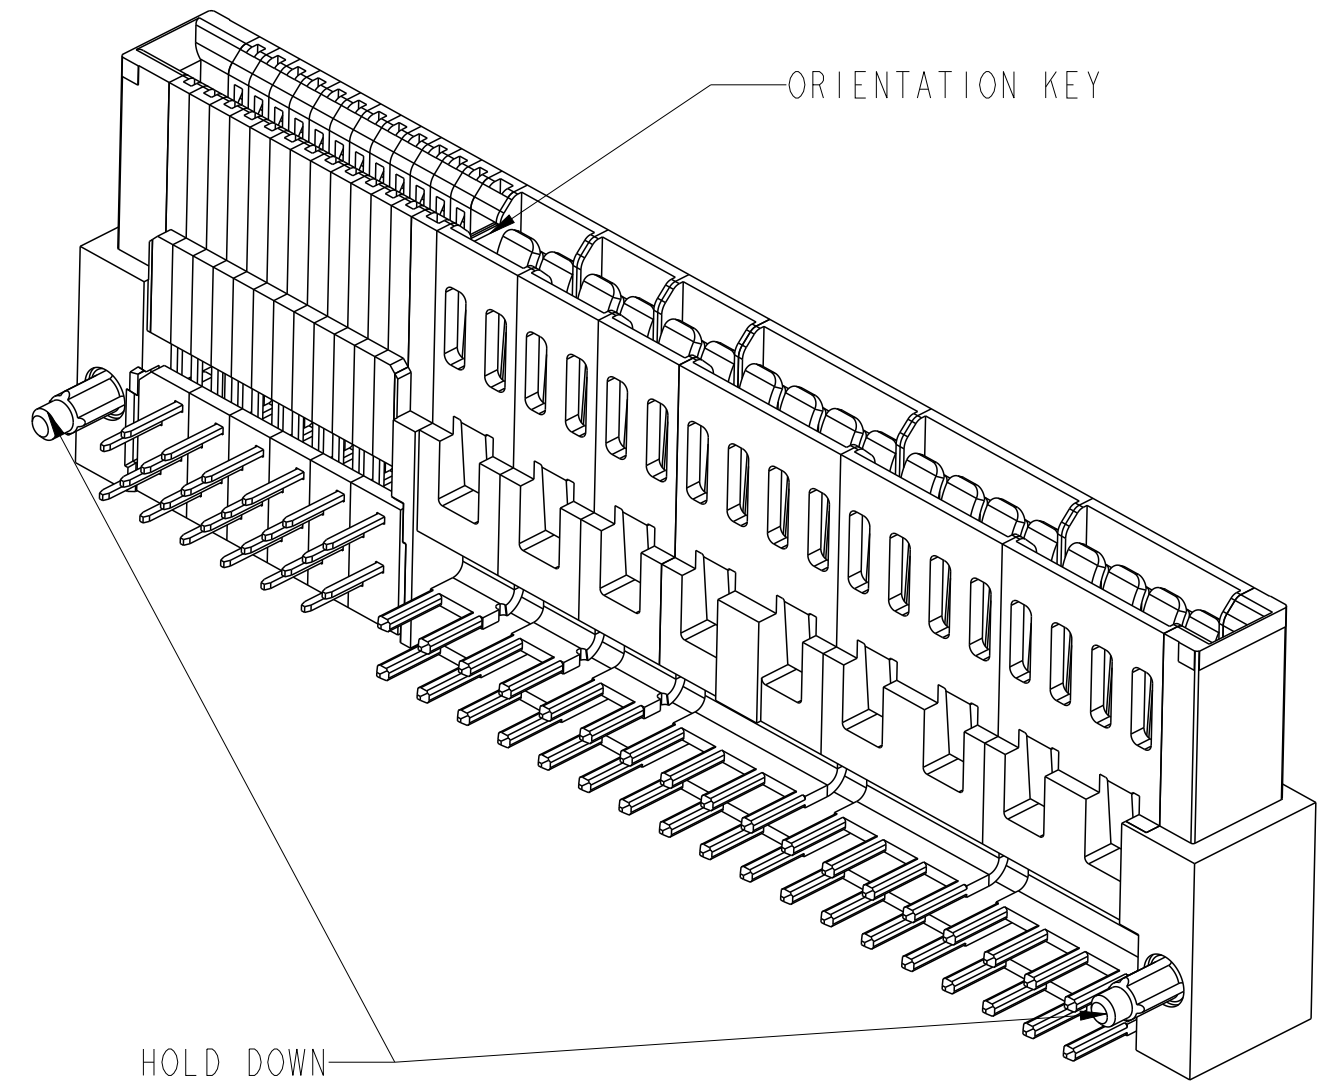

EXAMPLE: 10131077-241224ELF

TABLE 3: PART NUMBER CODE FOR HPCE R/A RECEPTACLE S+P CONFIG

NOTES:

1. CONNECTOR MATERIALS:

HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK
UL 94V-0 COMPLIANT
CONTACTS: HIGH PERFORMANCE COPPER ALLOY.

2. CONTACT FINISH REF. GS-12-604 SECTION 5.2.

3. PRODUCT SPECIFICATION: GS-12-604.

4. APPLICATION SPECIFICATION: GS-20-128.

5. PRODUCT MARKING ON HOUSING IN AREA SHOWN MEETS FCI SPECIFICATION: GS-24-007.

6. PACKAGING MEETS FCI SPECIFICATION GS-14-937.

7. ALL HOLE SIZES ARE FINISHED HOLE SIZES.

8. MOUNTING HOLES ARE UNPLATED
Ø 2.18 +/- 0.03 FOR SOLDER TAILS

9. MAXIMUM OVERALL LENGTH IS 100mm.


10. DIM IS NOT APPLICABLE IF NO 2 BEAM CONTACT.

11. DIM IS NOT APPLICABLE IF NO 4 BEAM CONTACT.

12. DIM IS NOT APPLICABLE IF NO ORIENTATION KEY.

13. A SYMBOL  WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

DIM	TABLE 2: LENGTH FORMULAS
DIM A 	$(MM + NN) / 2 \times 2.54 + (PP / 2) \times 1.27 + 9.12$
DIM B	$DIM A - 5.00$
DIM C	$DIM A - 2.34$
DIM D	$DIM A - 3.48$
DIM E	$DIM A - 5.30$
DIM F	$(PP / 2 - 1) \times 1.27 + (NN / 4 - 1) \times 5.08 + 14.61$ (WITH 2 BEAM CONTACT)
	$(PP / 2 - 1) \times 1.27 + 9.53$ (WITHOUT 2 BEAM CONTACT)
DIM G	$(PP / 2 - 1) \times 1.27 + 6.63$
DIM H	$(PP / 2 - 1) \times 1.27 + 6.99$
DIM J	$(PP / 2 - 1) \times 1.27 + 4.45$
DIM T	2.6 or 3.25

spec ref		-		dr		Hai-Ling Liu		2014/07/23		projection						MM		size		A2		scale		4:1			
tolerance std		ISO 406 ISO 1101		eng		Sunny2 Liu		2016/05/06		chr		Terris Liu		2016/05/20		appr		Pei-Ming Zheng		2016/05/24		product family		ecn no		ELX-DG-24036-1	
TOLERANCES UNLESS OTHERWISE SPECIFIED																						rel level		Released			
surface		linear		0.X		±0.5		Amphenol FCI		title		R/A REC S+P STANDARD		dwg no		10131077		rev		C							
				0.XX		±0.25						HIGH POWER CARD EDGE - UNIVERSAL															
ISO 1302		angular		0°		±2°																					
										</																	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru