

# 1N4001, 1N4002, 1N4003, 1N4004, 1N4005, 1N4006, 1N4007

## Axial-Lead Glass Passivated Standard Recovery Rectifiers

This data sheet provides information on subminiature size, axial lead mounted rectifiers for general-purpose low-power applications.

### Features

- Shipped in Plastic Bags, 1000 per bag
- Available Tape and Reeled, 5000 per reel, by adding a “RL” suffix to the part number
- Available in Fan-Fold Packaging, 3000 per box, by adding a “FF” suffix to the part number
- Pb-Free Packages are Available

### Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds, 1/16 in. from case
- Polarity: Cathode Indicated by Polarity Band


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



**ON Semiconductor®**


[www.onsemi.com](http://www.onsemi.com)

## LEAD MOUNTED RECTIFIERS 50–1000 VOLTS DIFFUSED JUNCTION



**CASE 59–10  
AXIAL LEAD  
PLASTIC**

### MARKING DIAGRAM



A = Assembly Location  
1N400x = Device Number  
x = 1, 2, 3, 4, 5, 6 or 7  
YY = Year  
WW = Work Week  
■ = Pb-Free Package  
(Note: Microdot may be in either location)

### ORDERING INFORMATION

See detailed ordering and shipping information on page 5 of this data sheet.

# 1N4001, 1N4002, 1N4003, 1N4004, 1N4005, 1N4006, 1N4007

## MAXIMUM RATINGS

| Rating                                                                                                      | Symbol                          | 1N4001           | 1N4002 | 1N4003 | 1N4004 | 1N4005 | 1N4006 | 1N4007 | Unit               |
|-------------------------------------------------------------------------------------------------------------|---------------------------------|------------------|--------|--------|--------|--------|--------|--------|--------------------|
| †Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                     | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 50               | 100    | 200    | 400    | 600    | 800    | 1000   | V                  |
| †Non–Repetitive Peak Reverse Voltage<br>(halfwave, single phase, 60 Hz)                                     | $V_{RSM}$                       | 60               | 120    | 240    | 480    | 720    | 1000   | 1200   | V                  |
| †RMS Reverse Voltage                                                                                        | $V_{R(RMS)}$                    | 35               | 70     | 140    | 280    | 420    | 560    | 700    | V                  |
| †Average Rectified Forward Current<br>(single phase, resistive load,<br>60 Hz, $T_A = 75^{\circ}\text{C}$ ) | $I_O$                           | 1.0              |        |        |        |        |        |        | A                  |
| †Non–Repetitive Peak Surge Current<br>(surge applied at rated load conditions)                              | $I_{FSM}$                       | 30 (for 1 cycle) |        |        |        |        |        |        | A                  |
| Operating and Storage Junction<br>Temperature Range                                                         | $T_J$<br>$T_{stg}$              | –65 to +175      |        |        |        |        |        |        | $^{\circ}\text{C}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

†Indicates JEDEC Registered Data

## THERMAL CHARACTERISTICS

| Rating                                          | Symbol          | Max    | Unit                        |
|-------------------------------------------------|-----------------|--------|-----------------------------|
| Maximum Thermal Resistance, Junction–to–Ambient | $R_{\theta JA}$ | Note 1 | $^{\circ}\text{C}/\text{W}$ |

## ELECTRICAL CHARACTERISTICS†

| Rating                                                                                                          | Symbol      | Typ         | Max      | Unit          |
|-----------------------------------------------------------------------------------------------------------------|-------------|-------------|----------|---------------|
| Maximum Instantaneous Forward Voltage Drop, ( $I_F = 1.0$ Amp, $T_J = 25^{\circ}\text{C}$ )                     | $V_F$       | 0.93        | 1.1      | V             |
| Maximum Full–Cycle Average Forward Voltage Drop, ( $I_O = 1.0$ Amp, $T_L = 75^{\circ}\text{C}$ , 1 inch leads)  | $V_{F(AV)}$ | –           | 0.8      | V             |
| Maximum Reverse Current (rated DC voltage)<br>( $T_J = 25^{\circ}\text{C}$ )<br>( $T_J = 100^{\circ}\text{C}$ ) | $I_R$       | 0.05<br>1.0 | 10<br>50 | $\mu\text{A}$ |
| Maximum Full–Cycle Average Reverse Current, ( $I_O = 1.0$ Amp, $T_L = 75^{\circ}\text{C}$ , 1 inch leads)       | $I_{R(AV)}$ | –           | 30       | $\mu\text{A}$ |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

†Indicates JEDEC Registered Data

# 1N4001, 1N4002, 1N4003, 1N4004, 1N4005, 1N4006, 1N4007

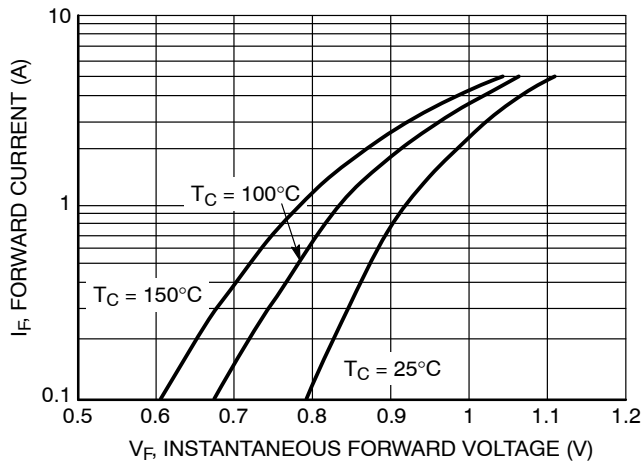


Figure 1. Typical Forward Voltage

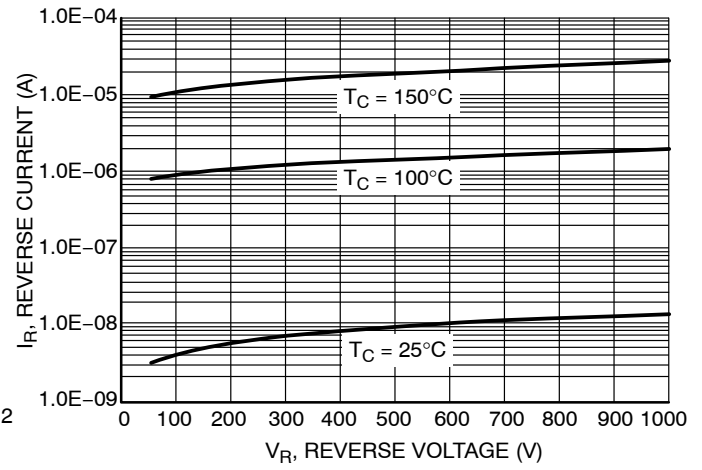


Figure 2. Typical Reverse Current

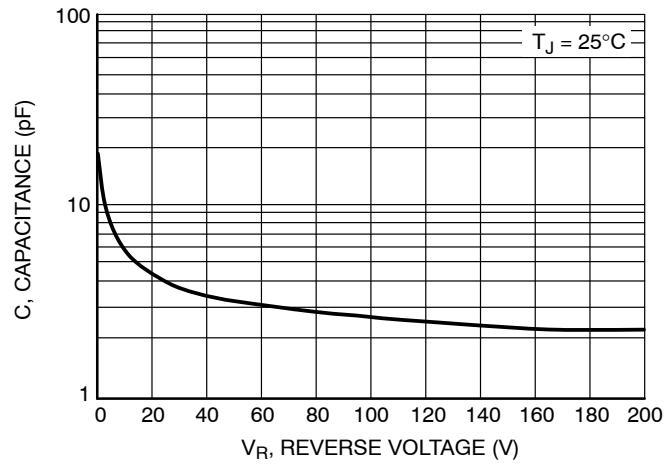


Figure 3. Typical Capacitance


NOTE 1. – AMBIENT MOUNTING DATA

Data shown for thermal resistance, junction-to-ambient ( $R_{\theta JA}$ ) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.


TYPICAL VALUES FOR  $R_{\theta JA}$  IN STILL AIR

| Mounting Method |                 | Lead Length, L |     |     | Units                |
|-----------------|-----------------|----------------|-----|-----|----------------------|
|                 |                 | 1/8            | 1/4 | 1/2 |                      |
| 1               | $R_{\theta JA}$ | 52             | 65  | 72  | $^{\circ}\text{C/W}$ |
| 2               |                 | 67             | 80  | 87  | $^{\circ}\text{C/W}$ |
| 3               |                 | 50             |     |     | $^{\circ}\text{C/W}$ |

MOUNTING METHOD 1

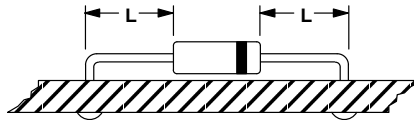


MOUNTING METHOD 2

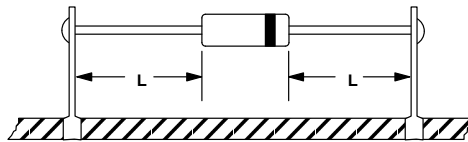

Vector Pin Mounting

MOUNTING METHOD 3

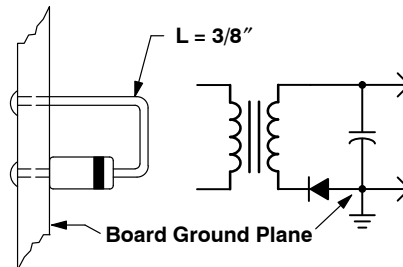

P.C. Board with  
1-1/2" X 1-1/2" Copper Surface

# 1N4001, 1N4002, 1N4003, 1N4004, 1N4005, 1N4006, 1N4007

## ORDERING INFORMATION

| Device    | Package                  | Shipping†        |
|-----------|--------------------------|------------------|
| 1N4001    | Axial Lead*              | 1000 Units/Bag   |
| 1N4001G   | Axial Lead*<br>(Pb-Free) | 1000 Units/Bag   |
| 1N4001FF  | Axial Lead*              | 3000 Units/Box   |
| 1N4001FFG | Axial Lead*<br>(Pb-Free) | 3000 Units/Box   |
| 1N4001RL  | Axial Lead*              | 5000/Tape & Reel |
| 1N4001RLG | Axial Lead*<br>(Pb-Free) | 5000/Tape & Reel |
| 1N4002    | Axial Lead*              | 1000 Units/Bag   |
| 1N4002G   | Axial Lead*<br>(Pb-Free) | 1000 Units/Bag   |
| 1N4002FF  | Axial Lead*              | 3000 Units/Box   |
| 1N4002FFG | Axial Lead*<br>(Pb-Free) | 3000 Units/Box   |
| 1N4002RL  | Axial Lead*              | 5000/Tape & Reel |
| 1N4002RLG | Axial Lead*<br>(Pb-Free) | 5000/Tape & Reel |
| 1N4003    | Axial Lead*              | 1000 Units/Bag   |
| 1N4003G   | Axial Lead*<br>(Pb-Free) | 1000 Units/Bag   |
| 1N4003FF  | Axial Lead*              | 3000 Units/Box   |
| 1N4003FFG | Axial Lead*<br>(Pb-Free) | 3000 Units/Box   |
| 1N4003RL  | Axial Lead*              | 5000/Tape & Reel |
| 1N4003RLG | Axial Lead*<br>(Pb-Free) | 5000/Tape & Reel |
| 1N4004    | Axial Lead*              | 1000 Units/Bag   |
| 1N4004G   | Axial Lead*<br>(Pb-Free) | 1000 Units/Bag   |
| 1N4004FF  | Axial Lead*              | 3000 Units/Box   |
| 1N4004FFG | Axial Lead*<br>(Pb-Free) | 3000 Units/Box   |
| 1N4004RL  | Axial Lead*              | 5000/Tape & Reel |
| 1N4004RLG | Axial Lead*<br>(Pb-Free) | 5000/Tape & Reel |
| 1N4005    | Axial Lead*              | 1000 Units/Bag   |
| 1N4005G   | Axial Lead*<br>(Pb-Free) | 1000 Units/Bag   |
| 1N4005FF  | Axial Lead*              | 3000 Units/Box   |
| 1N4005FFG | Axial Lead*<br>(Pb-Free) | 3000 Units/Box   |
| 1N4005RL  | Axial Lead*              | 5000/Tape & Reel |
| 1N4005RLG | Axial Lead*<br>(Pb-Free) | 5000/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*This package is inherently Pb-Free.

# 1N4001, 1N4002, 1N4003, 1N4004, 1N4005, 1N4006, 1N4007


## ORDERING INFORMATION

| Device    | Package                  | Shipping <sup>†</sup> |
|-----------|--------------------------|-----------------------|
| 1N4006    | Axial Lead*              | 1000 Units/Bag        |
| 1N4006G   | Axial Lead*<br>(Pb-Free) | 1000 Units/Bag        |
| 1N4006FF  | Axial Lead*              | 3000 Units/Box        |
| 1N4006FFG | Axial Lead*<br>(Pb-Free) | 3000 Units/Box        |
| 1N4006RL  | Axial Lead*              | 5000/Tape & Reel      |
| 1N4006RLG | Axial Lead*<br>(Pb-Free) | 5000/Tape & Reel      |
| 1N4007    | Axial Lead*              | 1000 Units/Bag        |
| 1N4007G   | Axial Lead*<br>(Pb-Free) | 1000 Units/Bag        |
| 1N4007FF  | Axial Lead*              | 3000 Units/Box        |
| 1N4007FFG | Axial Lead*<br>(Pb-Free) | 3000 Units/Box        |
| 1N4007RL  | Axial Lead*              | 5000/Tape & Reel      |
| 1N4007RLG | Axial Lead*<br>(Pb-Free) | 5000/Tape & Reel      |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*This package is inherently Pb-Free.

## PACKAGE DIMENSIONS

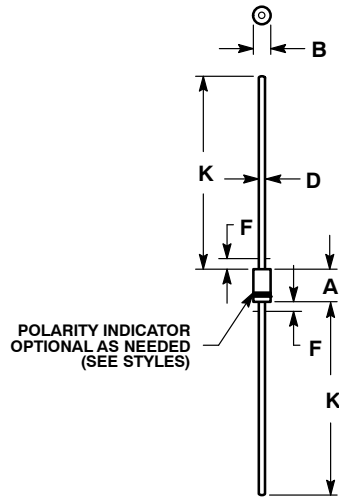AXIAL LEAD  
CASE 59-10  
ISSUE U

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ALL RULES AND NOTES ASSOCIATED WITH JEDEC DO-41 OUTLINE SHALL APPLY
4. POLARITY DENOTED BY CATHODE BAND.
5. LEAD DIAMETER NOT CONTROLLED WITHIN F DIMENSION.

| DIM | INCHES |       | MILLIMETERS |      |
|-----|--------|-------|-------------|------|
|     | MIN    | MAX   | MIN         | MAX  |
| A   | 0.161  | 0.205 | 4.10        | 5.20 |
| B   | 0.079  | 0.106 | 2.00        | 2.70 |
| D   | 0.028  | 0.034 | 0.71        | 0.86 |
| F   | ---    | 0.050 | ---         | 1.27 |
| K   | 1.000  | ---   | 25.40       | ---  |

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

## LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)