

# 40 Series

## Ohmicone® Silicone-Ceramic Conformal Axial Terminal Wirewound 1% and 5% Tolerance Standard



Ohmite 40 Series resistors are the most economical conformal silicone-ceramic coated resistors offered. These all-welded units are characterized by their low temperature coefficients and resistance to thermal shock, making them ideal for a wide range of electrical and electronic applications.

Units with 1% and 5% tolerances are identical in construction and electrical specifications. Durable but economical 40 Series resistors exceed industry requirements for quality.

### FEATURES

- Economical
- Applications include commercial, industrial and communications equipment
- Stability under high temperature conditions
- All-welded construction
- RoHS compliant; add "E" suffix to part number to specify.

### SERIES SPECIFICATIONS

Series	Wattage	Ohms	Voltage
41	1.0	0.10-6K	150
42	2.0	0.10-8K	100
43	3.0	0.10-20K	200
45	5.0	0.10-70K	460
47	7.0	0.10-80K	670
40	10.0	0.10-150K	1000

Non-Inductive versions available. Insert "N" before tolerance code.  
Example: 42NJ27R

### CHARACTERISTICS

<b>Coating</b>	Conformal silicone-ceramic.
<b>Core</b>	Ceramic.
<b>Terminals</b>	Solder-coated copper clad axial. RoHS solder composition is 96% Sn, 3.5% Ag, 0.5% Cu
<b>Derating</b>	Linearly from 100% @ +25°C to 0% @ +275°C.
<b>Tolerance</b>	±5% (J type), ±1% (F type) (other tolerances available).
<b>Power rating</b>	Based on 25°C free air rating
<b>Overload</b>	Under 5 watts: 5 times rated wattage for 5 seconds. 5 watts and over: 10 times rated wattage for 5 seconds.
<b>Temperature coefficient</b>	Under 1Ω: ±90 ppm/°C; 1Ω to 9.99Ω: ±50 ppm/°C; 10Ω and over: ±20 ppm/°C
<b>Operating temp. range</b>	-55°C to 275°C

### DIMENSIONS

(in./mm max.)



Series	Wattage	Length	Diam.	Lead ga.
41	1.0	0.437 / 11.1	0.125 / 3.2	24
42	2.0	0.406 / 10.3	0.219 / 5.6	20
43	3.0	0.593 / 15.1	0.219 / 5.6	20
45	5.0	0.937 / 23.8	0.343 / 8.7	18
47	7.0	1.280 / 32.5	0.343 / 8.7	18
40	10.0	1.900 / 48.3	0.406 / 10.3	18

(continued)

# 40 Series

## Ohmicone® Silicone-Ceramic Conformal Axial Terminal Wirewound 1% and 5% Tolerance Standard

### ORDERING INFORMATION


#### Standard part numbers

Ohmic value	Wattage and Tolerance										Ohmic value	Wattage and Tolerance										Ohmic value	Wattage and Tolerance										
	1% Tolerance					5% Tolerance						1% Tolerance					5% Tolerance						1% Tolerance					5% Tolerance					
	Part No. Prefix	Part No. Suffix	1	3	5	10	1	2	3	5		10	Part No. Prefix	Part No. Suffix	1	3	5	10	1	2	3		5	10	Part No. Prefix	Part No. Suffix	1	3	5	10	1	2	3
0.1	R10	41F	✓	✓	✓	✓	✓	✓	✓	✓	68	68R	41F	✓	✓	✓	✓	✓	✓	✓	✓	2,200	2K2	41F	✓	✓	✓	✓	✓	✓	✓	✓	✓
0.15	R15	43F	✓	✓	✓	✓	✓	✓	✓	✓	75	75R	43F	✓	✓	✓	✓	✓	✓	✓	✓	2,500	2K5	43F	✓	✓	✓	✓	✓	✓	✓	✓	✓
0.2	R20	45F	✓	✓	✓	✓	✓	✓	✓	✓	82	82R	45F	✓	✓	✓	✓	✓	✓	✓	✓	2,700	2K7	45F	✓	✓	✓	✓	✓	✓	✓	✓	✓
0.25	R25	40F	✓	✓	✓	✓	✓	✓	✓	✓	100	100	40F	✓	✓	✓	✓	✓	✓	✓	✓	3,000	3K0	40F	✓	✓	✓	✓	✓	✓	✓	✓	✓
0.3	R30	41J	✓	✓	✓	✓	✓	✓	✓	✓	120	120	41J	✓	✓	✓	✓	✓	✓	✓	✓	3,300	3K3	41J	✓	✓	✓	✓	✓	✓	✓	✓	✓
0.33	R33	42J	✓	✓	✓	✓	✓	✓	✓	✓	125	125	42J	✓	✓	✓	✓	✓	✓	✓	✓	3,500	3K5	42J	✓	✓	✓	✓	✓	✓	✓	✓	✓
0.4	R40	43J	✓	✓	✓	✓	✓	✓	✓	✓	150	150	43J	✓	✓	✓	✓	✓	✓	✓	✓	3,900	3K9	43J	✓	✓	✓	✓	✓	✓	✓	✓	✓
0.5	R50	45J	✓	✓	✓	✓	✓	✓	✓	✓	180	180	45J	✓	✓	✓	✓	✓	✓	✓	✓	4,000	4K0	45J	✓	✓	✓	✓	✓	✓	✓	✓	✓
0.75	R75	40J	✓	✓	✓	✓	✓	✓	✓	✓	200	200	40J	✓	✓	✓	✓	✓	✓	✓	✓	4,500	4K5	40J	✓	✓	✓	✓	✓	✓	✓	✓	✓
1	R10	41J	✓	✓	✓	✓	✓	✓	✓	✓	220	220	41J	✓	✓	✓	✓	✓	✓	✓	✓	4,700	4K7	41J	✓	✓	✓	✓	✓	✓	✓	✓	✓
1.5	R15	42J	✓	✓	✓	✓	✓	✓	✓	✓	225	225	42J	✓	✓	✓	✓	✓	✓	✓	✓	5,000	5K0	42J	✓	✓	✓	✓	✓	✓	✓	✓	✓
2	R20	43J	✓	✓	✓	✓	✓	✓	✓	✓	250	250	43J	✓	✓	✓	✓	✓	✓	✓	✓	6,000	6K0	43J	✓	✓	✓	✓	✓	✓	✓	✓	✓
2.2	R22	45J	✓	✓	✓	✓	✓	✓	✓	✓	270	270	45J	✓	✓	✓	✓	✓	✓	✓	✓	6,800	6K8	45J	✓	✓	✓	✓	✓	✓	✓	✓	✓
3	R30	40J	✓	✓	✓	✓	✓	✓	✓	✓	300	300	40J	✓	✓	✓	✓	✓	✓	✓	✓	7,000	7K0	40J	✓	✓	✓	✓	✓	✓	✓	✓	✓
4	R40	41J	✓	✓	✓	✓	✓	✓	✓	✓	330	330	41J	✓	✓	✓	✓	✓	✓	✓	✓	7,500	7K5	41J	✓	✓	✓	✓	✓	✓	✓	✓	✓
5	R50	42J	✓	✓	✓	✓	✓	✓	✓	✓	350	350	42J	✓	✓	✓	✓	✓	✓	✓	✓	8,000	8K0	42J	✓	✓	✓	✓	✓	✓	✓	✓	✓
7.5	R75	43J	✓	✓	✓	✓	✓	✓	✓	✓	390	390	43J	✓	✓	✓	✓	✓	✓	✓	✓	9,000	9K0	43J	✓	✓	✓	✓	✓	✓	✓	✓	✓
10	R10	45J	✓	✓	✓	✓	✓	✓	✓	✓	400	400	45J	✓	✓	✓	✓	✓	✓	✓	✓	10,000	10K	45J	✓	✓	✓	✓	✓	✓	✓	✓	✓
12	R12	40J	✓	✓	✓	✓	✓	✓	✓	✓	450	450	40J	✓	✓	✓	✓	✓	✓	✓	✓	12,000	12K	40J	✓	✓	✓	✓	✓	✓	✓	✓	✓
15	R15	41J	✓	✓	✓	✓	✓	✓	✓	✓	470	470	41J	✓	✓	✓	✓	✓	✓	✓	✓	13,000	13K	41J	✓	✓	✓	✓	✓	✓	✓	✓	✓
18	R18	42J	✓	✓	✓	✓	✓	✓	✓	✓	500	500	42J	✓	✓	✓	✓	✓	✓	✓	✓	15,000	15K	42J	✓	✓	✓	✓	✓	✓	✓	✓	✓
20	R20	43J	✓	✓	✓	✓	✓	✓	✓	✓	560	560	43J	✓	✓	✓	✓	✓	✓	✓	✓	17,000	17K	43J	✓	✓	✓	✓	✓	✓	✓	✓	✓
22	R22	45J	✓	✓	✓	✓	✓	✓	✓	✓	600	600	45J	✓	✓	✓	✓	✓	✓	✓	✓	20,000	20K	45J	✓	✓	✓	✓	✓	✓	✓	✓	✓
25	R25	40J	✓	✓	✓	✓	✓	✓	✓	✓	680	680	40J	✓	✓	✓	✓	✓	✓	✓	✓	22,000	22K	40J	✓	✓	✓	✓	✓	✓	✓	✓	✓
27	R27	41J	✓	✓	✓	✓	✓	✓	✓	✓	750	750	41J	✓	✓	✓	✓	✓	✓	✓	✓	25,000	25K	41J	✓	✓	✓	✓	✓	✓	✓	✓	✓
30	R30	42J	✓	✓	✓	✓	✓	✓	✓	✓	800	800	42J	✓	✓	✓	✓	✓	✓	✓	✓	30,000	30K	42J	✓	✓	✓	✓	✓	✓	✓	✓	✓
33	R33	43J	✓	✓	✓	✓	✓	✓	✓	✓	820	820	43J	✓	✓	✓	✓	✓	✓	✓	✓	33,000	33K	43J	✓	✓	✓	✓	✓	✓	✓	✓	✓
35	R35	45J	✓	✓	✓	✓	✓	✓	✓	✓	900	900	45J	✓	✓	✓	✓	✓	✓	✓	✓	35,000	35K	45J	✓	✓	✓	✓	✓	✓	✓	✓	✓
39	R39	40J	✓	✓	✓	✓	✓	✓	✓	✓	1,000	1K0	40J	✓	✓	✓	✓	✓	✓	✓	✓	40,000	40K	40J	✓	✓	✓	✓	✓	✓	✓	✓	✓
40	R40	41J	✓	✓	✓	✓	✓	✓	✓	✓	1,100	1K1	41J	✓	✓	✓	✓	✓	✓	✓	✓	50,000	50K	41J	✓	✓	✓	✓	✓	✓	✓	✓	✓
47	R47	42J	✓	✓	✓	✓	✓	✓	✓	✓	1,200	1K2	42J	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
50	R50	43J	✓	✓	✓	✓	✓	✓	✓	✓	1,500	1K5	43J	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
56	R56	45J	✓	✓	✓	✓	✓	✓	✓	✓	1,800	1K8	45J	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
62	R62	40J	✓	✓	✓	✓	✓	✓	✓	✓	2,000	2K0	40J	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Shaded values involve very fine resistance wire and should not be used in critical applications without burn-in and/or thermal cycling.

✓ = Standard values

✦ = Non-standard values subject to minimum handling charge per item

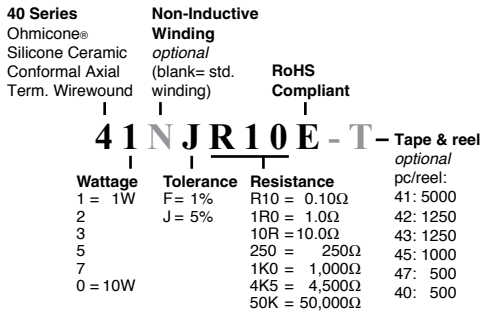

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)