


80 WATT AC-DC CONVERTER

WRCJ-FWX Series 2 CHANNEL

Specifications<AC/DC>	Model					
WRCJ**FWX-U 80WATTS/2 OUTPUTS	WRCJ21FWX-U	WRCJ21FWXB-U	WRCJ22FWX-U	WRCJ23FWX-U	WRCJ24FWX-U	WRCJ24FWXB-U
Input Characteristic						
Input Voltage	AC115/230V					
Input Current	1.8/1.1A					
Input Range *1	AC85-132V/170-264V(DC220-350V)					
Input Frequency	50/60Hz					
Input Frequency Range	47-440Hz					
Phase	Single					
Inrush Current *2	20A(maximum) at AC100/40A(maximum) at AC230V					
Efficiency [%] (typical) *3	75	76	76	77	75	76

BLOCK DIAGRAM

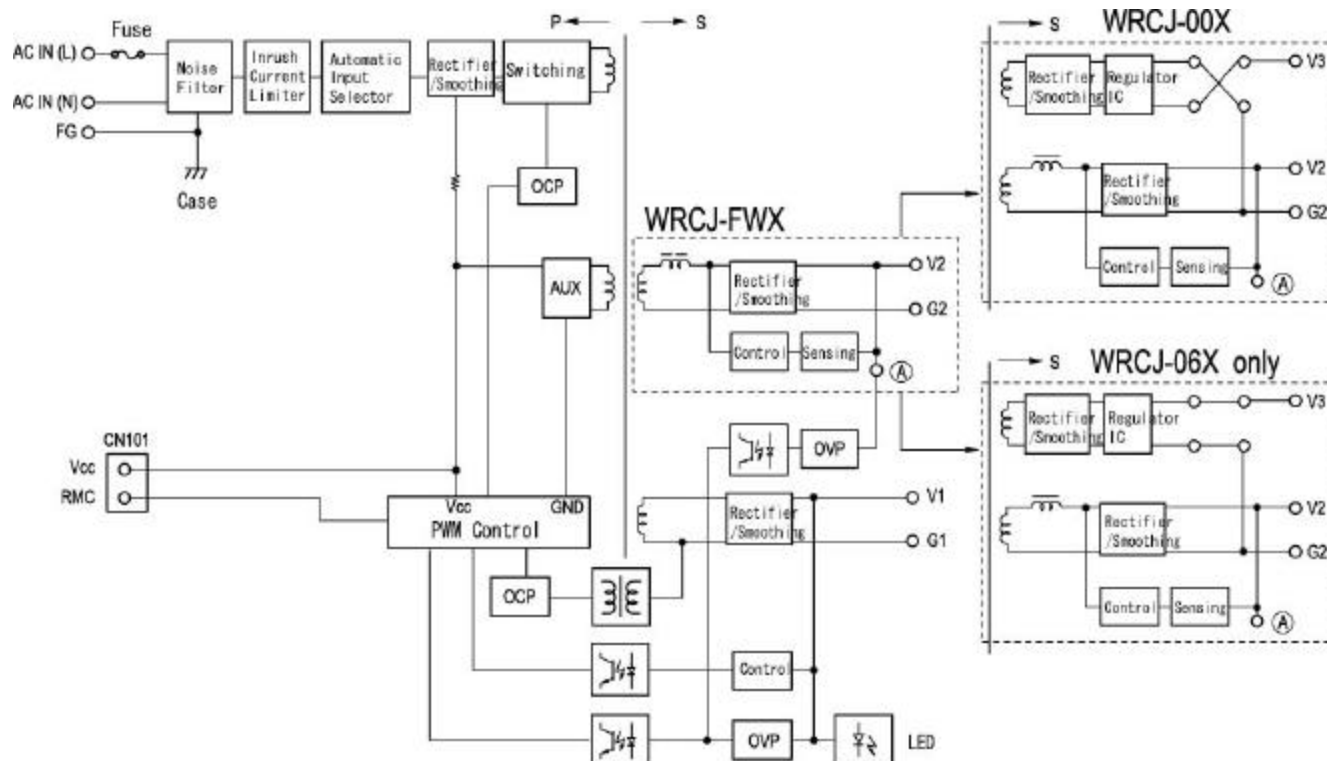

Specifications<AC/DC>	Model											
WRCJ**FWX-U 80WATTS/2 OUTPUTS	WRCJ21FWX-U		WRCJ21FWXB-U		WRCJ22FWX-U		WRCJ23FWX-U		WRCJ24FWX-U		WRCJ24FWXB-U	
Output Characteristic												
Output Voltage [V]	5	24	5	24	12	12	15	15	5	12	5	12
Output Current [A]	0.5-10.0	2.0	0.5-6.0	4.0	0.2-5.0	4.0	0.2-4.0	3.2	0.5-10.0	4.0	0.5-6.0	6.0
POWER [W]	80(maximum)											
Voltage Adjust Range	V1: +5%/-0% of Rated Output Voltage(at no load within the input range)											
	V2: +/-5% of Rated Output Voltage(at no load within the input range)											
Ripple and Noise [mVp-p](maximum) *4	150	340	150	340	220	220	250	250	150	220	150	220
Regulation												
a.Statistic Line Regulation [mV](maximum)	25	120	25	120	60	60	75	75	25	60	25	60
b.Statistic Load Regulation [mV](maximum)	50	240	50	240	120	120	150	150	50	120	50	120
c.Temperature Coefficient *5	0.03%/ °C											
d.Drift[mV](maximum) *6	50	240	50	240	120	120	150	150	50	120	50	120
e.Dynamic Load Regulation [mV](typical) *7	not specified											
f.Recovery Time *7	not specified											
Rise up time	550mS(maximum) at 25 °C and rated input/output											
Hold up time	20mS(minimum) at 25 °C and rated input/output											
Functions												
Overcurrent Protection [A]	Current Limiting with automatic recovery											
	Please refer to individual spec-sheet											
Overvoltage Protection	Output shutdown(to reset,leave 3minutes after shut-off)											
>=120% of Rated Output	6.0	28.8	6.0	28.8	14.4	14.4	18.0	18.0	6.0	14.4	6.0	14.4
Remote Sense	not available											
Remote On/Off	available											
Power Fail Detection	not available											
Parallel/series Operation	not available											
Environmental												
Operating Temperature °8	-5 to +40 °C/open frame type:-5 to +50 °C											
Operating Humidity	30 to 85%RH(non-condensing)											
Storage Temperature	-20 to +85 °C											
Storage Humidity	10 to 85%RH(non-condensing)											
Withstanding Voltage	Primary-Secondary AC3,000V for 1minute											
	Primary-Frame Ground AC2,500V for 1minute											
	Secondary-Frame Ground AC500V for 1minute											
Isolation Resistance	Primary-Secondary-Frame Ground 100MTΩ(minimum) by DC500V insulation tester											
Vibration	5-10Hz:10mm double amplitude 10-55Hz:19.6m/s ² 20minutes' period for 60minutes each along X Y Z axes(non-operating)											
Shock	294m/s ²											
Cooling	Convection											
? Leakage Current	1mA(maximum) at 25 °C, rated input/output and rated input frequency											
? Line Conducted Noise	Built to meet VDE0871 Class B											
	Built to meet VCCI Class B											
	Built to meet FCC Part15-B Class B											
? Safety	UL: UL1950											
	C-UL: CSA C22.2 No.950											
	VDE:EN60950,IEC950,VDE0805											
? Weight (typical)	730g /open frame type:670g											
? MTBF [H]	320,000											
? Switching Frequency[kHz](typical)	250	200		200		200		200		200		

Conditions:

*1 Automatically selected at AC140V +/-2V

*2 at cold start

*3 at AC100V input and output of 80watt

*4 measured by a bayonet probe at the end of a pair of 20cm long wires terminated with a 22uF electrolytic capacitor and a 0.1uF film capacitor in parallel at a 0 to 100MHz bandwidth

*5 at -5 to +40°C/open frame type:-5 to +50 °C

*6 for 7hour period after 1hour warm-up at 25°C and rated input/output

*7 when output current changed from 25% to 75% of rated output current rapidly at rated input

*8 safety approved at 25 °C at UL/C-UL and 50 °C at VDE




ETA-USA


HIGH QUALITY SWITCHING POWER SUPPLIES

ETA-USA Tel: 408-778-2793 Fax: 408-779-2753 e-mail: sales@eta-usa.com


DERATING CURVE

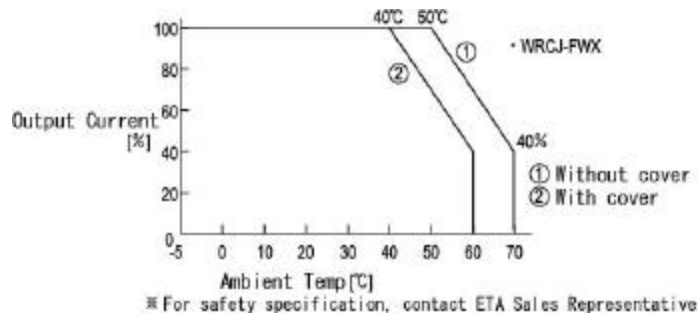



EFFICIENCY CURVE

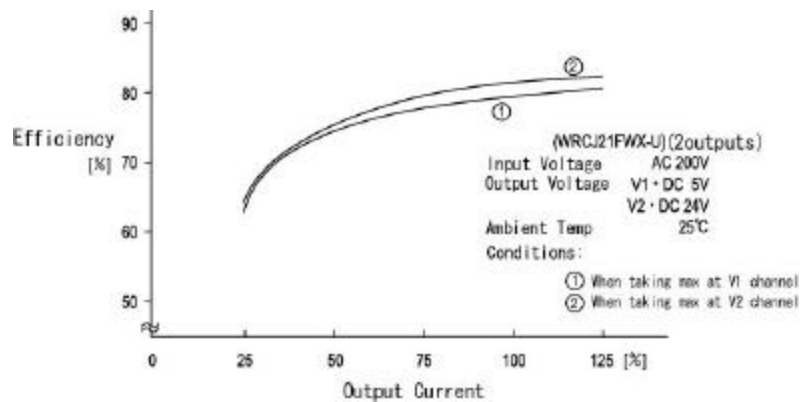



OCP CURVE

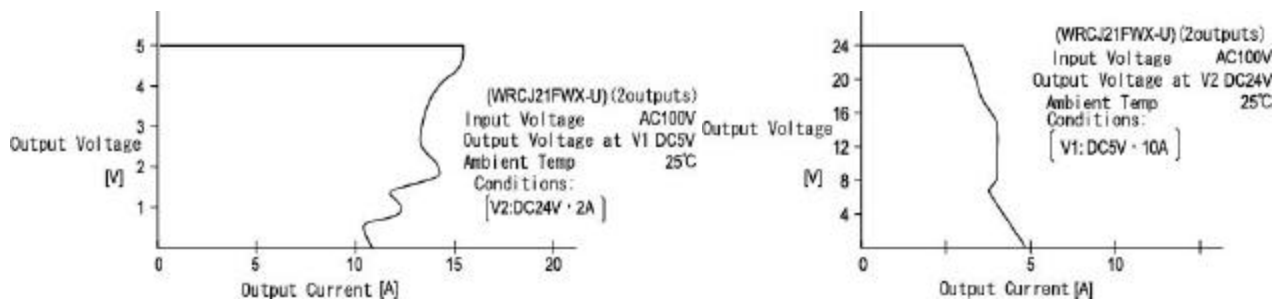

DIMENSION DIAGRAM

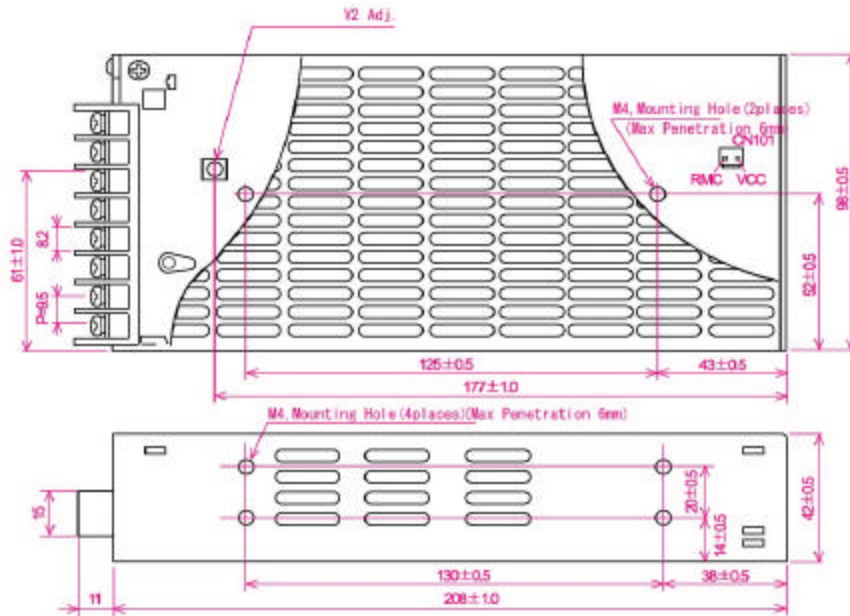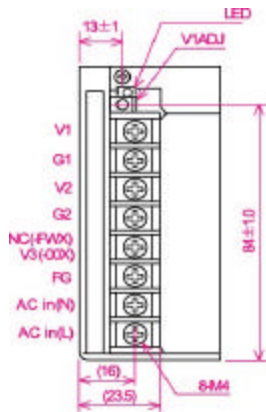

Output Vol

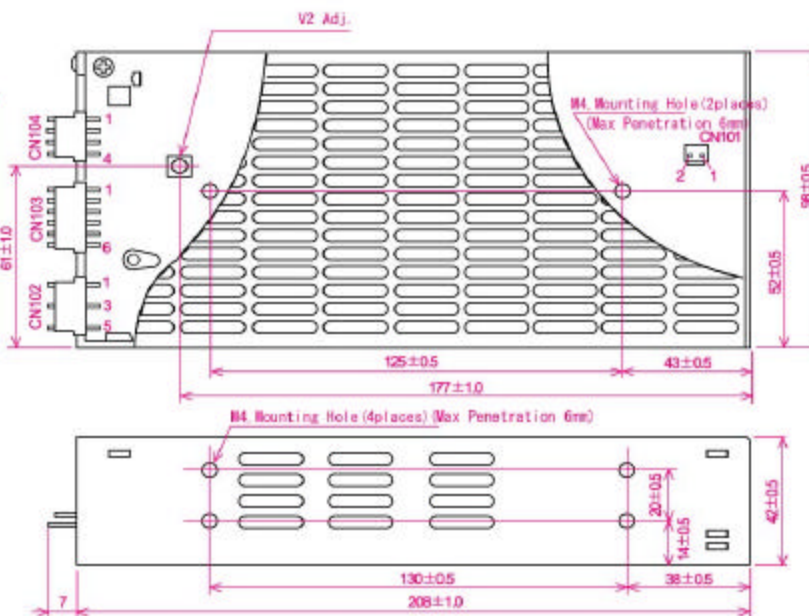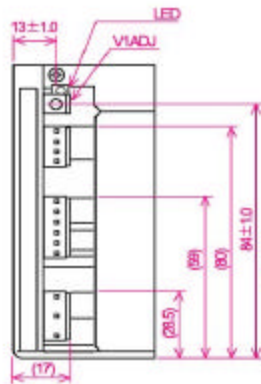

Output Vol

Output Vol

Pin Assignments			
CN101	CN102	CN104	CN103
1 Vcc	1 FG	1 V1	1 V2
2 RMC	2 NC	2 V1	2 V2
	3 AC in(N)	3 G1	3 G2
	4 NC	4 G1	4 G2
	5 AC in(L)		5 NC(-FWX-S), V3(-OOX-S)
			6 NC(-FWX-S), V3(-OOX-S)

	Housing
CN101	VR-2N
CN102	VR-6N
CN103	VR-6N
CN104	VR-6N

Maker: JST

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru