

DWG. NO.

SA94843

# RBGT GROUNDING & RBMT MOUNTING TRACKS

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

PRO-E

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

SUPERSEDES: SE94843-5

| REV | DESCRIPTION           | BY DATE      | CHKD DATE    |
|-----|-----------------------|--------------|--------------|
| U   | REVISED PER ECN 12047 | RSK 10-09-13 | SDH 10-09-13 |
| T   | REVISED PER ECN 11710 | RSK 05-02-12 | SDH 05-02-12 |
| S   | REVISED PER ECN 11271 | VKP 11-15-10 | SDH 11-15-10 |
| R   | REVISED PER ECN 7622  | JRD 09-20-02 | SDH 09-20-02 |

DRAWING TITLE

**TRACKS, GROUNDING & MOUNTING**

LINEAR MEASURE:  INCH [mm]

CAT NO. **RBGT \_ & RBMT \_ (SEE TABLE, SHT. 2)**

THIRD ANGLE PROJECTION

CAGE NO.: 09922

SIZE: A



**CUSTOMER**

**SOURIAU**

APPROVAL

|        |     |          |
|--------|-----|----------|
| DRAWN: | VKP | 11-15-10 |
| CHKD : | SDH | 11-15-10 |
| DSGN : | JDA | 10-13-92 |
| MFG :  | DH  | 11-15-10 |
| QC :   | DK  | 11-15-10 |

TOLERANCES UNLESS OTHERWISE SPECIFIED

| No. OF PLACES | INCH [mm]     |
|---------------|---------------|
| ONE PLACE     | ±.1 [±3]      |
| TWO PLACES    | ±.02 [±0.5]   |
| THREE PLACES  | ±.010 [±0.25] |
| ANGLES ±1°    |               |

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.

[www.souriau.com](http://www.souriau.com)

|                    |     |
|--------------------|-----|
| DRAWING SCALE: 1:1 |     |
| DRAWING NO.        | REV |
| SA94843            | U   |
| 1 OF 6             |     |

DWG. NO.  
SA94843

NOTES:

- 1. GROUNDING TRACK ACCOMMODATES PIN CONTACTS PER MIL-C-39029/1-101. WITH A WIRE RANGE OF 24-22-20 AWG. USE INSERTION/REMOVAL TOOL PER MIL-I-81969/14C-11.

MATERIAL:

- STRAIN RELIEF GROMMET: SILICONE RUBBER, COLOR RED
- GROMMET BONDING: EPOXY
- GROUNDING MODULE BODY: GLASS FORTIFIED THERMOPLASTIC UL94V-0. COLOR BLUE
- GROUNDING AND MOUNTING TRACKS: 6063-T6 ALUMINUM
- GROUNDING RIVETS: ALUMINUM ALLOY
- GROUNDING SOCKET CONTACTS: BERYLLIUM COPPER
- CONTACT RETENTION CLIPS: BERYLLIUM COPPER
- SOCKET CONTACT SLEEVES: THERMOPLASTIC, LIQUID CRYSTAL POLYMER
- TERMINAL IDENTIFICATION STRIP: THERMOPLASTIC, UL94V-0, COLOR WHITE
- PROTECTIVE COATING: POLYURETHANE, COLOR OPTIONAL

FINISH:

- GROUNDING AND MOUNTING TRACKS: CHROMATE CONVERSION COATING PER MIL-C-81706, CLASS 3, METHOD C, COLOR GOLD. (REF: ALODINE 1200)
- GROUNDING SOCKET CONTACTS: 50 MICROINCHES [1.27 MICRONS] MIN. NICKEL ALL OVER. PIN CONTACT CURRENT BEARING SURFACE OVER-PLATED WITH 50 MICROINCHES [1.27 MICRONS] MIN. HARD GOLD.

| DESCRIPTION TABLE   |                 |            |
|---------------------|-----------------|------------|
| SOURIAU CATALOG NO. | (O.A LENGTH)    | WEIGHT (g) |
| RBGT2               | 2.000 [50.80]   | 17.5       |
| RBGT4               | 4.000 [101.60]  | 35.0       |
| RBGT6               | 6.000 [152.40]  | 52.5       |
| RBGT8               | 8.000 [203.20]  | 70.0       |
| RBGT10              | 10.000 [254.00] | 87.5       |
| RBGT14              | 14.000 [355.60] | 122.5      |
| RBGT16              | 16.000 [406.40] | 140.0      |
| RBGT18              | 18.000 [457.20] | 157.5      |
| RBGT20              | 20.000 [508]    | 175.0      |
| RBGT22              | 22.000 [558.80] | 192.5      |
| RBGT26              | 26.000 [660.40] | 227.5      |
| RBGT28              | 28.000 [711.20] | 245.0      |
| RBGT34              | 34.000 [863.60] | 297.5      |
| RBGT38              | 38.000 [965.20] | 332.5      |
| RBMT2               | 2.000 [50.80]   | 6.25       |
| RBMT4               | 4.000 [101.60]  | 12.5       |
| RBMT6               | 6.000 [152.40]  | 18.75      |
| RBMT8               | 8.000 [203.20]  | 25.0       |
| RBMT10              | 10.000 [254.00] | 31.25      |
| RBMT14              | 14.000 [355.60] | 43.75      |
| RBMT16              | 16.000 [406.40] | 50.0       |
| RBMT18              | 18.000 [457.20] | 56.25      |
| RBMT20              | 20.000 [508]    | 62.5       |
| RBMT22              | 22.000 [558.80] | 68.75      |
| RBMT26              | 26.000 [660.40] | 81.25      |
| RBMT28              | 28.000 [711.20] | 87.5       |
| RBMT34              | 34.000 [863.60] | 106.25     |
| RBMT38              | 38.000 [965.20] | 118.75     |

|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV |                             | BY DATE | CHKD DATE |

|   |                |                     |  |
|---|----------------|---------------------|--|
| DRAWING TITLE   |                |                     |  |
| <b>TRACKS, GROUNDING &amp; MOUNTING</b>                       |                |                     |  |
| <b>RBGT _ &amp; RBMT _ (SEE TABLE, SHT. 2)</b>                |                |                     |  |
| CAT NO.   | SIZE: A        | DRAWN: VKP 11-15-10 |  |
| CAGE NO.: 09922   |                | CHKD : SDH 11-15-10 |  |
| <b>CUSTOMER</b>   | <b>SOURIAU</b> | DSGN : JDA 10-13-92 |  |
|   |                | MFG : DH 11-15-10   |  |
|   |                | QC : DK 11-15-10    |  |
|   |                | DRAWING SCALE: 1:1  |  |
|   |                | DRAWING NO. REV     |  |
| INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994. |                | SA94843 U           |  |
| <a href="http://www.souriau.com">www.souriau.com</a>          |                | 2 OF 6              |  |

LINEAR MEASURE: INCH [mm]

THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED

| No. OF PLACES | INCH [mm]     |
|---------------|---------------|
| ONE PLACE     | ±.1 [±3]      |
| TWO PLACES    | ±.02 [±0.5]   |
| THREE PLACES  | ±.010 [±0.25] |
| ANGLES ±1°    |               |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

**PRO-E**

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

DWG. NO.  
SA94843

# PERFORMANCE CHARACTERISTICS

ELECTRICAL:

CONTACT RESISTANCE: IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.16.  
REF: MIL-STD-1344, METHOD 3004.  
SIZE 16-20: 45 MILLIVOLTS MAX. AT 7.5A WITH  
20 AWG SILVER PLATED WIRE.

LOW LEVEL CONTACT RESISTANCE: IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.17.  
REF: MIL-STD-1344, METHOD 3002.  
SIZE 16-20: .009 OHMS MAX. WITH  
20 AWG SILVER PLATED WIRE.

VOLTAGE STABILITY: 4 MILLIVOLT MAX. DIFFERENCE BETWEEN RECORDED HIGHEST  
AND LOWEST POTENTIAL DROP VALUES IN ACCORDANCE WITH  
MIL-T-81714, PARA. 4.6.18.

ENVIRONMENTAL:

FLUID IMMERSION: ALL MATERIALS ARE RESISTANT TO BMS3-11 (SKYDROL LD-4) AND  
MIL-H-5606 HYDRAULIC FLUIDS, AND MIL-L-7808 AND  
MIL-L-23699 LUBRICATING OILS.

HUMIDITY: IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.10.  
REF: MIL-STD-1344, METHOD 1002, TYPE II, (EXCEPT WITHOUT  
STEP 7b)

SALT SPRAY: 500 HOURS IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.12.  
REF: MIL-STD-1344, METHOD 1001, TEST CONDITION C.

VIBRATION (SINUSOIDAL): IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.8.1.  
REF: MIL-STD-202, METHOD 204, TEST CONDITION G.

VIBRATION (RANDOM): IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.8.2.  
REF: MIL-STD-1344, METHOD 2005, TEST CONDITION VI, LETTER J.

MECHANICAL (IMPACT) SHOCK: IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.9.  
REF: MIL-STD-1344, METHOD 2004, TEST CONDITION D.

THERMAL SHOCK: IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.5.  
REF: MIL-STD-1344, METHOD 1003, TEST CONDITION A,  
(EXCEPT TEMPERATURE EXTREMES ARE -65°C TO +150°C  
[-85°F TO +302°F]).

TEMPERATURE LIFE: 150°C [302°F] FOR 1000 HOURS IN ACCORDANCE WITH  
MIL-T-81714, PARA. 4.6.13.

OZONE: IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.14.  
REF: MIL-STD-1344, METHOD 1007.

|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV | DESCRIPTION                 | BY DATE | CHKD DATE |

DRAWING TITLE  
**TRACKS, GROUNDING & MOUNTING**

CAT NO. **RBGT \_ & RBMT \_ (SEE TABLE, SHT. 2)**

CAGE NO.: 09922 SIZE: A

|   |  |          |          |          |        |     |          |        |     |          |       |    |          |      |    |          |
|---|--|----------|----------|----------|--------|-----|----------|--------|-----|----------|-------|----|----------|------|----|----------|
| <p><b>CUSTOMER</b></p> <p><b>SOURIAU</b></p> <p>www.souriau.com</p> | <p>APPROVAL</p> <table border="1"> <tr><td>DRAWN:</td><td>VKP</td><td>11-15-10</td></tr> <tr><td>CHKD :</td><td>SDH</td><td>11-15-10</td></tr> <tr><td>DSGN :</td><td>JDA</td><td>10-13-92</td></tr> <tr><td>MFG :</td><td>DH</td><td>11-15-10</td></tr> <tr><td>QC :</td><td>DK</td><td>11-15-10</td></tr> </table> | DRAWN:   | VKP      | 11-15-10 | CHKD : | SDH | 11-15-10 | DSGN : | JDA | 10-13-92 | MFG : | DH | 11-15-10 | QC : | DK | 11-15-10 |
|   | DRAWN:   | VKP      | 11-15-10 |          |        |     |          |        |     |          |       |    |          |      |    |          |
|   | CHKD :   | SDH      | 11-15-10 |          |        |     |          |        |     |          |       |    |          |      |    |          |
|   | DSGN :   | JDA      | 10-13-92 |          |        |     |          |        |     |          |       |    |          |      |    |          |
|   | MFG :  | DH       | 11-15-10 |          |        |     |          |        |     |          |       |    |          |      |    |          |
| QC :  | DK   | 11-15-10 |          |          |        |     |          |        |     |          |       |    |          |      |    |          |
| DRAWING SCALE: 1:1  |  |          |          |          |        |     |          |        |     |          |       |    |          |      |    |          |
| DRAWING NO. REV   |  |          |          |          |        |     |          |        |     |          |       |    |          |      |    |          |
| SA94843 U   |  |          |          |          |        |     |          |        |     |          |       |    |          |      |    |          |
| 3 OF 6  |  |          |          |          |        |     |          |        |     |          |       |    |          |      |    |          |

LINEAR MEASURE: INCH [mm]

THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED

| No. OF PLACES | INCH [mm]     |
|---------------|---------------|
| ONE PLACE     | ±.1 [±3]      |
| TWO PLACES    | ±.02 [±0.5]   |
| THREE PLACES  | ±.010 [±0.25] |
| ANGLES ±1°    |               |

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

**PRO-E**

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

DWG. NO.

SA94843

# PERFORMANCE CHARACTERISTICS

**MECHANICAL:**

- MAGNETIC PERMEABILITY:** ALL MATERIALS DO NOT EXHIBIT A RELATIVE MAGNETIC PERMEABILITY OF GREATER THAN 2 IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.15. REF: MIL-STD-1344, METHOD 3006.
- MAINTENANCE AGING:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.3.
- CONTACT INSERTION/REMOVAL FORCE:** 10 LBS [44,4N] MAX. IN ACCORDANCE WITH MIL-T-81714, PARA.4.6.3
- CONTACT RETENTION:** 20 LBS [88,9N] MIN. IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.4. AXIAL DISPLACEMENT DOES NOT EXCEED .012 [0,30]. REF: MIL-STD-1344, METHOD 2007.
- PROBE DAMAGE:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.2.
- RETENTION SYSTEM FLUID IMMERSION:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.23.
- INTERNAL CONTACT DURABILITY:** 100 CYCLES OF MATING AND UNMATING TO DEPTH OF MECHANICAL AND ELECTRICAL ENGAGEMENT IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.19.
- OVERSIZE PIN CONTACT PROTECTION:** GROUNDING MODULE DESIGNED TO PREVENT ENTRANCE OF AN OVERSIZE TEST PIN OF Ø.070 [1,78] IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.20.
- CONTACT WALKOUT:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.22. REF: MIL-STD-1549.

SEE DRAWING SE94834 FOR FEEDBACK MODULE



FEEDBACK MODULE INSTALLED IN GROUNDING AND MOUNTING TRACKS  
SCALE 1:1

|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV | DESCRIPTION                 | BY DATE | CHKD DATE |

|   |  |                    |          |
|---|--|--------------------|----------|
| DRAWING TITLE   |  |                    |          |
| <b>TRACKS, GROUNDING &amp; MOUNTING</b>                       |  |                    |          |
| CAT NO. <b>RBGT _ &amp; RBMT _ (SEE TABLE, SHT. 2)</b>        |  |                    |          |
| CAGE NO.: 09922   |  | SIZE: A            |          |
| <b>CUSTOMER</b>   |  | <b>SOURIAU</b>     |          |
|   |  |                    |          |
| INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994. |  | APPROVAL           |          |
|   |  | DRAWN: VKP         | 11-15-10 |
|   |  | CHKD : SDH         | 11-15-10 |
|   |  | DSGN : JDA         | 10-13-92 |
|   |  | MFG : DH           | 11-15-10 |
|   |  | QC : DK            | 11-15-10 |
|   |  | DRAWING SCALE: 1:1 |          |
|   |  | DRAWING NO.        | REV      |
|   |  | SA94843            | U        |
|   |  | 4 OF 6             |          |

|                                       |               |           |
|---------------------------------------|---------------|-----------|
| LINEAR MEASURE:                       |               | INCH [mm] |
| THIRD ANGLE PROJECTION                |               |           |
|                                       |               |           |
| TOLERANCES UNLESS OTHERWISE SPECIFIED |               |           |
| No. OF PLACES                         | INCH [mm]     |           |
| ONE PLACE                             | ±.1 [±3]      |           |
| TWO PLACES                            | ±.02 [±0.5]   |           |
| THREE PLACES                          | ±.010 [±0.25] |           |
| ANGLES ±1°                            |               |           |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

**PRO-E**

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.


DWG. NO.

SA94843

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

PRO-E

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

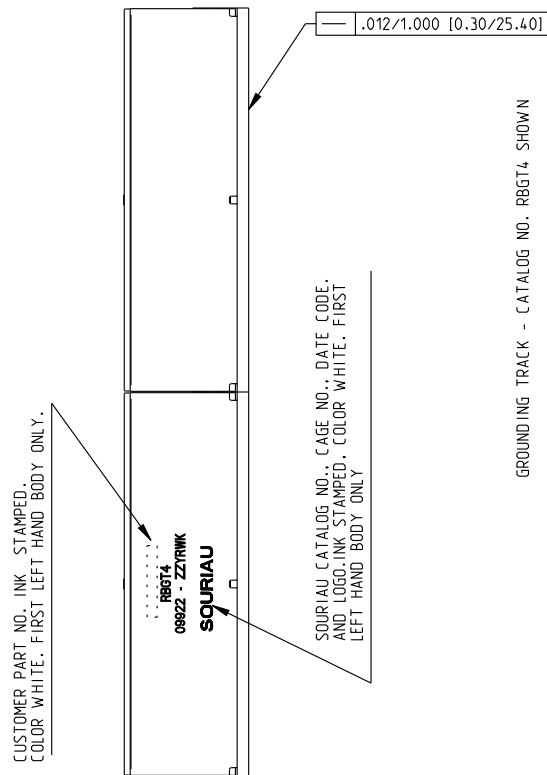

GROUNDING TRACK - CATALOG NO. RBGT4 SHOWN

|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV | DESCRIPTION                 | BY DATE | CHKD DATE |

DRAWING TITLE  
**TRACKS, GROUNDING & MOUNTING**

CAT NO. **RBGT** & **RBMT** (SEE TABLE, SHT. 2)

CAGE NO.: 09922 SIZE: A

|                                       |                  |
|---------------------------------------|------------------|
| LINEAR MEASURE:                       | <b>INCH</b> [mm] |
| THIRD ANGLE PROJECTION                |                  |
| TOLERANCES UNLESS OTHERWISE SPECIFIED |                  |
| No. OF PLACES                         | INCH [mm]        |
| ONE PLACE                             | ±.1 [±3]         |
| TWO PLACES                            | ±.02 [±0.5]      |
| THREE PLACES                          | ±.010 [±0.25]    |
| ANGLES ±1°                            |                  |

**CUSTOMER**

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.

**SOURIAU**

www.souriau.com

|                    |            |          |
|--------------------|------------|----------|
| APPROVAL           | DRAWN: VKP | 11-15-10 |
|                    | CHKD : SDH | 11-15-10 |
|                    | DSGN : JDA | 10-13-92 |
|                    | MFG : DH   | 11-15-10 |
|                    | QC : DK    | 11-15-10 |
| DRAWING SCALE: 1:1 |            |          |
| DRAWING NO.        |            | REV      |
| SA94843            |            | U        |
| 5 OF 6             |            |          |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

PRO-E

THIS INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

DWG. NO.

SA94843



MOUNTING TRACK - CATALOG NO. RBMT4 SHOWN

DIMENSIONS, INK STAMPING, AND OTHER FEATURES ARE THE SAME AS THE GROUNDING TRACK EXCEPT AS SHOWN.

| SOURIAU CATALOG NO. | BOEING PART NO. | MOUNTING TRACK      |                 | FEEDBACK MODULES ACCOMMODATED SEE DWG. SE94834 |
|---------------------|-----------------|---------------------|-----------------|--|
|                     |                 | SOURIAU CATALOG NO. | BOEING PART NO. |  |
| RBGT2               | S280W 555-502   | RBMT2               | S280W 555-602   | 2  |
| RBGT4               | S280W 555-504   | RBMT4               | S280W 555-604   | 4  |
| RBGT6               | S280W 555-506   | RBMT6               | S280W 555-606   | 6  |
| RBGT8               | S280W 555-508   | RBMT8               | S280W 555-608   | 8  |
| RBGT10              | S280W 555-510   | RBMT10              | S280W 555-610   | 10   |
| RBGT14              | S280W 555-514   | RBMT14              | S280W 555-614   | 14   |
| RBGT16              | S280W 555-516   | RBMT16              | S280W 555-616   | 16   |
| RBGT18              | S280W 555-518   | RBMT18              | S280W 555-618   | 18   |
| RBGT20              | S280W 555-520   | RBMT20              | S280W 555-620   | 20   |
| RBGT22              | S280W 555-522   | RBMT22              | S280W 555-622   | 22   |
| RBGT26              | S280W 555-526   | RBMT26              | S280W 555-626   | 26   |
| RBGT28              | S280W 555-528   | RBMT28              | S280W 555-628   | 28   |
| RBGT34              | S280W 555-534   | RBMT34              | S280W 555-634   | 34   |
| RBGT38              | S280W 555-538   | RBMT38              | S280W 555-638   | 38   |

|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV | ECN NUMBER                  | BY DATE | CHKD DATE |

DRAWING TITLE  
**TRACKS, GROUNDING & MOUNTING**

CAT NO. **RBGT \_ & RBMT \_ (SEE TABLE, SHT. 2)**

CAGE NO.: 09922 SIZE: A

|   |                |                     |                     |
|---|----------------|---------------------|---------------------|
| <b>CUSTOMER</b>   | <b>SOURIAU</b> | APPROVAL            | DRAWN: VKP 11-15-10 |
|   |                | CHKD : SDH 11-15-10 | DSGN : JDA 10-13-92 |
| INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994. |                | MFG : DH 11-15-10   | QC : DK 11-15-10    |
|   |                | DRAWING SCALE: 1:1  |                     |
| www.souriau.com   |                | DRAWING NO. REV     |                     |
|   |                | SA94843 U           |                     |

|                                       |                  |
|---------------------------------------|------------------|
| LINEAR MEASURE:                       | <b>INCH</b> [mm] |
| THIRD ANGLE PROJECTION                |                  |
| TOLERANCES UNLESS OTHERWISE SPECIFIED |                  |
| No. OF PLACES                         | INCH [mm]        |
| ONE PLACE                             | ±.1 [±3]         |
| TWO PLACES                            | ±.02 [±0.5]      |
| THREE PLACES                          | ±.010 [±0.25]    |
| ANGLES ±1°                            |                  |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)