

### Main

|                           |                               |
|---------------------------|-------------------------------|
| Range of product          | Zelio Logic                   |
| Product or component type | Discrete I/O extension module |

### Complementary

|  |   |
|--|---|
| Number or control scheme lines         | 120 with ladder programming   |
| Cycle time                             | 6...90 ms   |
| Backup time                            | 10 years at 77 °F (25 °C)   |
| Clock drift                            | 12 min/year at 32...131 °F (0...55 °C)  |
| Checks                                 | Program memory on each power up   |
| [Us] rated supply voltage              | 100...240 V AC  |
| Supply voltage limits                  | 85...264 V  |
| Supply frequency                       | 50/60 Hz  |
| Reverse polarity protection            | With  |
| Discrete input number                  | 4   |
| Discrete input voltage                 | 100...240 V AC  |
| Discrete input current                 | 0.6 mA  |
| Discrete input frequency               | 47...53 Hz<br>57...63 Hz  |
| Voltage state 1 guaranteed             | $\geq 79$ V for discrete input  |
| Voltage state 0 guaranteed             | $\leq 40$ V for discrete input  |
| Current state 1 guaranteed             | $\geq 0.17$ mA for discrete input   |
| Current state 0 guaranteed             | $\leq 0.5$ mA for discrete input  |
| Input impedance                        | 350 kOhm (discrete input)   |
| Number of outputs                      | 2 relay output(s)   |
| Output voltage limits                  | 24...250 V AC<br>5...30 V DC (relay output)   |
| Contacts type and composition          | NO relay output   |
| Output thermal current                 | 8 A for all 2 outputs (relay output)  |
| Electrical durability                  | 500000 cycles at 230 V, 0.9 A (AC-15) for relay output conforming to EN/IEC 60947-5-1<br>500000 cycles at 230 V, 1.5 A (AC-12) for relay output conforming to EN/IEC 60947-5-1<br>500000 cycles at 24 V, 0.6 A (DC-13) for relay output conforming to EN/IEC 60947-5-1<br>500000 cycles at 24 V, 1.5 A (DC-12) for relay output conforming to EN/IEC 60947-5-1  |
| Switching capacity in mA               | $\geq 10$ mA at 12 V (relay output)   |
| Operating rate in Hz                   | 0.1 Hz (at 1e) for relay output<br>10 Hz (no load) for relay output   |
| Mechanical durability                  | 10000000 cycles (relay output)  |
| [Uimp] rated impulse withstand voltage | 4 kV conforming to EN/IEC 60947-1 and EN/IEC 60664-1  |
| Response time                          | 10 ms (from state 0 to state 1) relay output<br>5 ms (from state 1 to state 0) relay output<br>50 ms with ladder programming (from state 0 to state 1) discrete input<br>50 ms with ladder programming (from state 1 to state 0) discrete input<br>50...255 ms with FBD programming (from state 0 to state 1) discrete input<br>50...255 ms with FBD programming (from state 1 to state 0) discrete input |
| Connections - terminals                | Screw terminals, flexible cable with cable end 1 x 0.25...1 x 2.5 mm <sup>2</sup> / AWG 24...AWG 14 AWG<br>Screw terminals, flexible cable with cable end 2 x 0.25...2 x 0.75 mm <sup>2</sup> / AWG 24...AWG  |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                      |   |
|----------------------|---|
|                      | 18 AWG<br>Screw terminals, semi-solid cable 1 x 0.2...1 x 2.5 mm <sup>2</sup> / AWG 25...AWG 14 AWG<br>Screw terminals, solid cable 1 x 0.2...1 x 2.5 mm <sup>2</sup> / AWG 25...AWG 14 AWG<br>Screw terminals, solid cable 2 x 0.2...2 x 1.5 mm <sup>2</sup> / AWG 24...AWG 16 AWG |
| Tightening torque    | 4.42 lbf.in (0.5 N.m)   |
| Overvoltage category | III conforming to EN/IEC 60664-1  |
| Product weight       | 0.28 lb(US) (0.125 kg)  |

## Environment

|                                       |   |
|---------------------------------------|---|
| product certifications                | CSA<br>C-Tick<br>GL<br>GOST<br>UL   |
| standards                             | EN/IEC 60068-2-27 Ea<br>EN/IEC 60068-2-6 Fc<br>EN/IEC 61000-4-11<br>EN/IEC 61000-4-12<br>EN/IEC 61000-4-2 level 3<br>EN/IEC 61000-4-3<br>EN/IEC 61000-4-4 level 3<br>EN/IEC 61000-4-5<br>EN/IEC 61000-4-6 level 3                                       |
| IP degree of protection               | IP20 (terminal block) conforming to IEC 60529<br>IP40 (front panel) conforming to IEC 60529   |
| environmental characteristic          | EMC directive conforming to EN/IEC 61000-6-2<br>EMC directive conforming to EN/IEC 61000-6-3<br>EMC directive conforming to EN/IEC 61000-6-4<br>EMC directive conforming to EN/IEC 61131-2 zone B<br>Low voltage directive conforming to EN/IEC 61131-2 |
| disturbance radiated/conducted        | Class B conforming to EN 55022-11 group 1   |
| pollution degree                      | 2 conforming to EN/IEC 61131-2  |
| ambient air temperature for operation | -4...104 °F (-20...40 °C) in non-ventilated enclosure conforming to IEC 60068-2-1 and IEC 60068-2-2<br>-4...131 °F (-20...55 °C) conforming to IEC 60068-2-1 and IEC 60068-2-2  |
| ambient air temperature for storage   | -40...158 °F (-40...70 °C)  |
| operating altitude                    | 6561.68 ft (2000 m)   |
| altitude transport                    | <= 10000 ft (3048 m)  |
| relative humidity                     | 95 % without condensation or dripping water   |

## Offer Sustainability


|  |  |
|--|--|
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    |

## Contractual warranty


|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

## I/O Extension Modules

### Mounting on 35 mm/1.38 in. DIN Rail

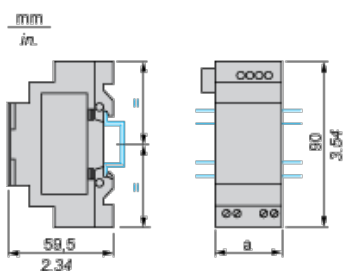


## Screw Fixing (Retractable Lugs)

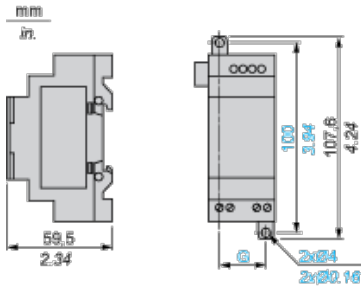

| SR3     | a (mm/in.) | G (mm/in.) |
|---------|------------|------------|
| XT61••  | 35 / 1.38  | 25 / 0.98  |
| XT101•• | 72 / 2.83  | 60 / 2.36  |
| XT141•• | 72 / 2.83  | 60 / 2.36  |

## Connection of Smart Relays on AC Supply


### SR••••1B, SR••••1FU

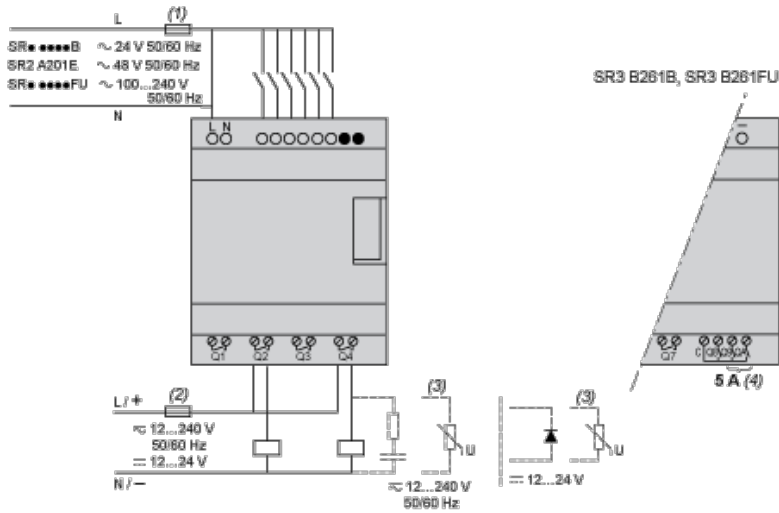

- (1) 1 A quick-blow fuse or circuit-breaker.
- (2) Fuse or circuit-breaker.
- (3) Inductive load.
- (4) Q9 and QA: 5 A (max. current in terminal C: 10 A).

### With Discrete I/O Extension Module

#### SR3B•••B + SR3XT•••B, SR3B•••FU + SR3XT•••FU

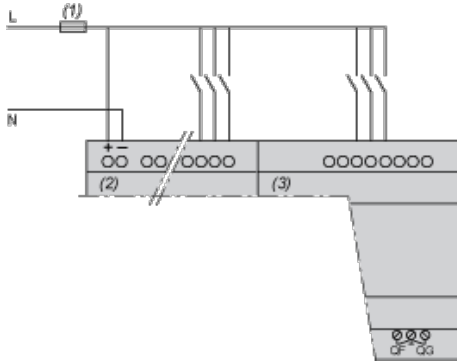

- (1) 1 A quick-blow fuse or circuit-breaker.


**NOTE:** QF and QG: 5 A for SR3XT141••

## Compact and Modular Smart Relays

## Electrical Durability of Relay Outputs

(in millions of operating cycles, conforming to IEC/EN 60947-5-1)

AC-12 (1)

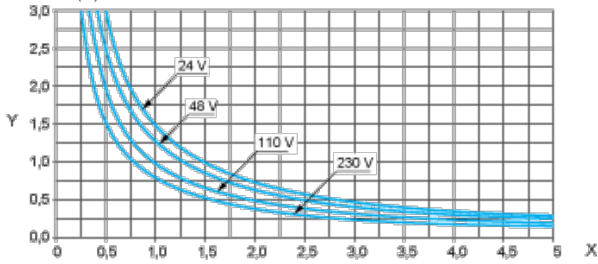


X: Current (A)

Y: Millions of operating cycles

(1) AC-12: switching resistive loads and opto-coupler isolated solid-state loads,  $\cos \geq 0.9$ .

AC-14 (1)

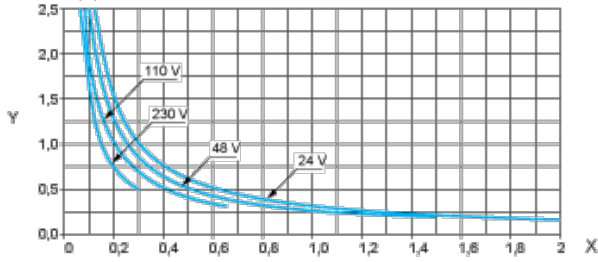


X: Current (A)

Y: Millions of operating cycles

(1) AC-14: switching small electromagnetic loads  $\leq 72$  VA, make:  $\cos = 0.3$ , break:  $\cos = 0.3$ .

AC-15 (1)

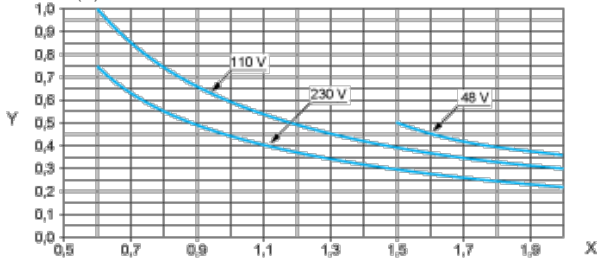

X: Current (A)

Y: Millions of operating cycles

(1) AC-15: switching electromagnetic loads  $\geq 72$  VA, make:  $\cos = 0.7$ , break:  $\cos = 0.4$ .

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)