


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X3		F	ECN 387	06/09/95	C

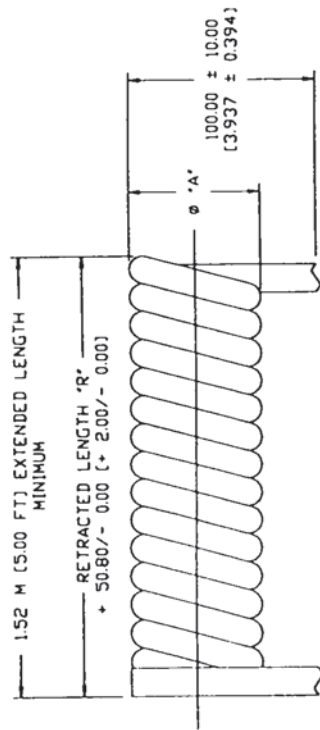

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.



- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	431.80	(17.000)	L=13.00" X W=20.00" X H=9.0
5	457.20	(18.000)	L=13.00" X W=20.00" X H=9.0
6	558.80	(22.000)	L=13.00" X W=25.00" X H=9.0
CONDUCTORS NUMBER OF	MILLIMETERS	INCHES	DIMENSION MAX. OUTSIDE SHIPPING BOX
TABULATION BLOCK			
THIRD ANGLE PROJECTION			
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.35 (0.250)			
DR: GETH WYNN E: 06/09/95		TITLE: 26 AWG (12/0.12 mm) BARE COPP 500 FT. EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE	
CHKD: [Signature]		PART NO: 121-X10-0X3	
CHKD: [Signature]		CUSTOMER: I/O INTERCONNECT	
CHKD: [Signature]		SCALE: NONE	
CHKD: [Signature]		SHEET 2 OF 2	

A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X2		I	ECN 387	06/09/95	C.T.

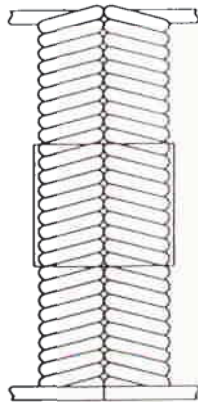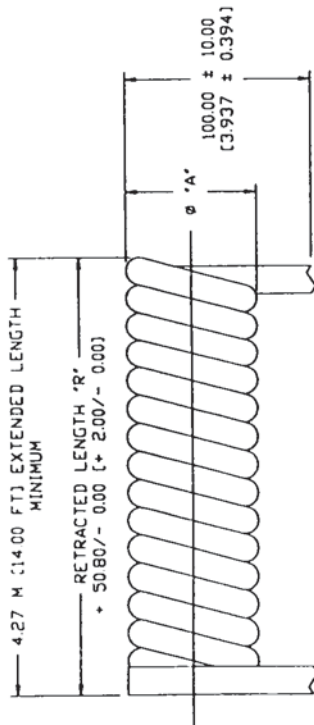

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

- 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
- 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	863.60	[34.000]	L=13.00' X W=40.00' X H=9.00
6	1117.60	[44.000]	L=13.00' X W=50.00' X H=9.00
8	1270.00	[50.000]	L=13.00' X W=55.00' X H=9.00
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX
NUMBER OF	RETRACTED LENGTH 'R'	INCHES	OUTSIDE SHIPPING BOX


TABULATION BLOCK

THIRD ANGLE PROJECTION			I/O INTERCONNECT
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.35 (0.250)		SANTA ANA, CALIFORNIA	
DR: C. WANG		TITLE: 06/09/95	
CHKD: [Signature]		PART NO: 121-X10-0X2	
CHKD: [Signature]		CUSTOMER: I/O INTERCONNECT	
CHKD: [Signature]		SCALE: NONE	
CHKD: [Signature]		SHEET: 2 OF 2	

6/10/95

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. USA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE / REV.	DESCRIPTION	DATE	APPROV.
X10-0X0	D	ECN 387	06/09/95	G.T.

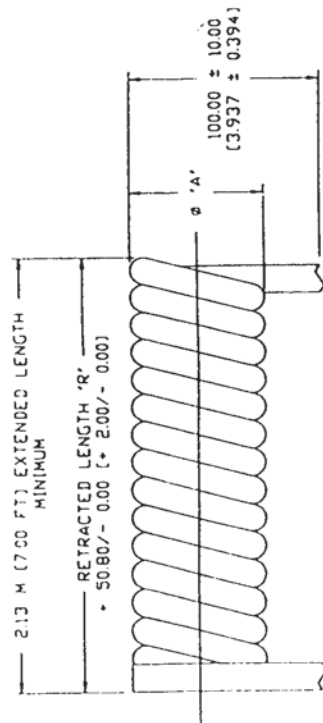

BUNDLE SPECIFICATION

NOTES UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.

1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY

10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX.

CLOSE PLASTIC BAG AND SEAL BAG ALONG 3 SURFACES

WITH TAPE



4	533.40	(21.000)	L=13.00" X W=25.00" X H=9.00"
6	609.60	(24.000)	L=13.00" X W=25.00" X H=9.00"
8	711.20	(28.000)	L=13.00" X W=30.00" X H=9.00"
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX.
NUMBER OF	RETRACTED LENGTH "R"		OUTSIDE SHIPPING BOX

TABULATION BLOCK

I/O INTERCONNECT 26 AVG (12/0.12 mm) BARE COPPER 7.00 FT. EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE	
DR: CAVI C. VAG CHKD: <i>Valley</i>	TITLE: SANTA ANA, CALIFORNIA DATE: 06/09/95 PART NO: 121-X10-0X0 CUSTOMER: I/O INTERCONNECT SCALE: NONE SHEET: 2 OF 2

THIRD ANGLE PROJECTION



UNLESS OTHERWISE NOTED:


1) DIMENSIONS ARE IN MILLIMETER (INCHES)

2) TOLERANCES:


XX ± 0.20 (0.008)

XXX ± 6.35 (0.250)


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. USA, AND SHALL BE KEPT IN CONFIDENTIALITY. NO PART OR PORTION OF THIS DOCUMENT SHALL BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

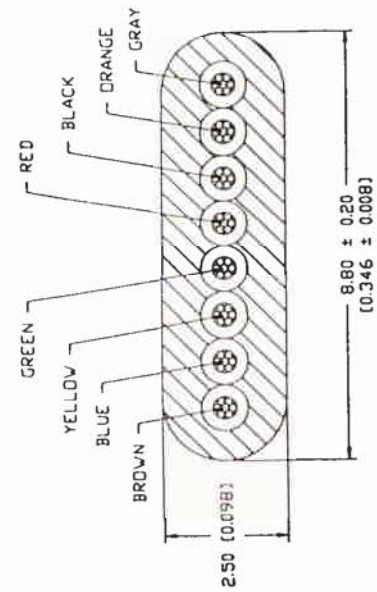

8 CONDUCTOR CABLE

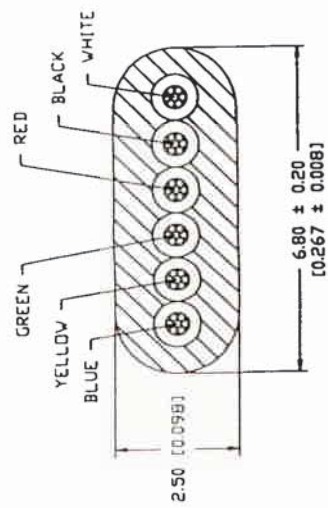

6 CONDUCTOR CABLE

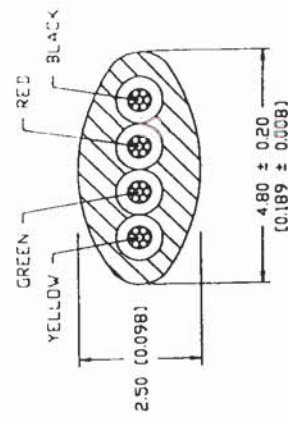

4 CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/012 mm) STRANDED BARE COPPER.
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

121-410-003	4	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-410-013	4	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-410-023	4	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-610-003	6	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-610-013	6	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-610-023	6	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-810-003	8	SILVER SATIN	[0.748 ± 0.0	19.00 ± 1.0
121-810-013	8	BLACK	[0.748 ± 0.0	19.00 ± 1.0
121-810-023	8	WHITE	[0.748 ± 0.0	19.00 ± 1.0
I/O INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø "A"	

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
XXX ± 6.35 (0.250)

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: CATH WONG TITLE: 26 AWG (12/012 mm) BARE COPPER
C. WONG 06/09/95 5.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE

CHKD: *Karl Berg* PART NO: 121-X10-0X3
CHKD: *[Signature]* CUSTOMER: I/O INTERCONNECT
CHKD: *[Signature]* SCALE: NONE SHEET 1 OF 1


DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

THESE DIMENSIONS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF I/O INTERCONNECT, INC. OR ITS APPLICABLE SUBSIDIARIES.

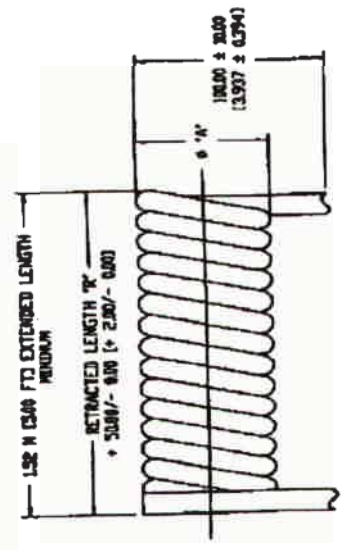

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED

- 1.0 MATERIAL AND SPECIFICATIONS
- 1.1 CONDUCTORS: 26 AWG (0.2/0.12 mm) STAMPED BARE COPPER
- 1.2 INSULATION: POLYPROPYLENE
- 1.3 COLOR: PER CALLOUT
- 1.4 PACKAGING: SEE PAGE 2
- 2.0 ELECTRICAL CHARACTERISTICS
- 2.1 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
- 2.2 CONDUCTORS RESISTANCE: 140 OHMS/KM MAX AT 20°C
- 2.3 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN AT 20°C
- 2.4 CAPACITANCE: 15 PF/FT (MM)
- 2.5 DIELECTRIC TEST: AC-500V PER 1 MINUTE
- 3.0 PACKAGING SPECIFICATION
- 3.1 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION
- 3.2 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PILES MAX PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE

CONDUCTORS NUMBER OF	RETRACTED LENGTH "F"		THICKNESS INCH	OUTSIDE SHIPPING BOX
	MILLIMETERS	INCHES		
4	431.00	(17.000)	L=13.00" X V=28.00" X H=9.00"	
6	457.20	(18.000)	L=13.00" X V=28.00" X H=9.00"	
8	508.00	(20.000)	L=13.00" X V=28.00" X H=9.00"	
10	609.60	(24.000)	L=13.00" X V=28.00" X H=9.00"	

THIRD ANGLE PROJECTION	ISO INTERCONNECT
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETERS (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.25 (0.010)	SANTA ANA, CALIFORNIA 26 AWG (0.2/0.12 mm) BARE COPPER 500 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE PART NO. 12-100-000 REV. 1/0 INTERCONNECT SHEET 2 OF 2

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru