


A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X3	F		ECN 387	06/09/95	C

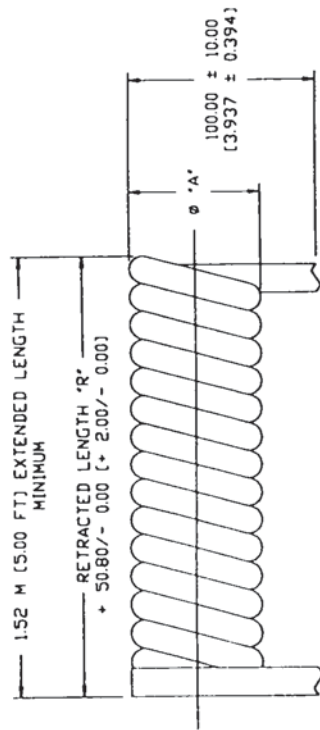

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	431.80	(17.000)	L=13.00" X W=20.00" X H=90
5	457.20	(18.000)	L=13.00" X W=20.00" X H=90
6	558.80	(22.000)	L=13.00" X W=25.00" X H=90
CONDUCTORS		MILLIMETERS	DIMENSION MAX.
NUMBER OF		RETRACTED LENGTH 'R'	OUTSIDE SHIPPING BOX

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: *W/AM* TITLE: 26 AWG (12/0.12 mm) BARE COPP
 E: *W/AM* 06/09/95 500 FT EXTENDED, NON-UL
 UNSHIELDED, MODULAR CABLE


CHKD: *[Signature]* PART NO: 121-X10-0X3
 CHKD: *[Signature]* CUSTOMER: I/O
 CHKD: *[Signature]* INTERCONNECT
 CHKD: *[Signature]* SCALE: NONE SHEET 2 OF

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN MILLIMETER (INCHES)
 2) TOLERANCES:
 X.X ± 0.20 (0.008)
 X.XX ± 0.35 (0.250)

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO. X10-0X2	ZONE (REV.) 1	DESCRIPTION ESN 387	DATE 06/09/95	APPROV. C.T.
---------------------	------------------	------------------------	------------------	-----------------

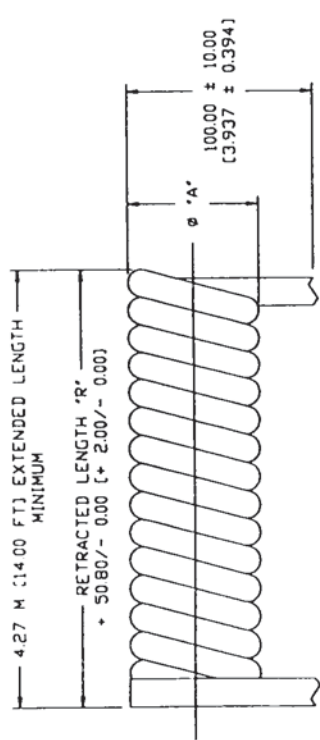

BUNDLE SPECIFICATION

- NOTES: UNLESS OTHERWISE SPECIFIED:
- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	863.60	(34.000)	L=13.00" X W=40.00" X H=9.00
6	1117.60	(44.000)	L=13.00" X W=50.00" X H=9.00
B	1270.00	(50.000)	L=13.00" X W=55.00" X H=9.00
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX
NUMBER OF	RETRACTED LENGTH "R"		OUTSIDE SHIPPING BOX


TABULATION BLOCK

UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: X.X ± 0.20 (0.008) X.XX ± 0.35 (0.250)		DR: C. WANG C. WANG DATE: 06/09/95 TITLE: I/O INTERCONNECT SANTA ANA, CALIFORNIA 35 AWG (12/0.12 MM) BARE COPPER 14.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE PART NO: 121-X10-0X2 CUSTOMER: I/O INTERCONNECT SCALE: NONE SHEET 2 OF	

6/10/95

DWG. NO	ZONE	REV	DESCRIPTION	DATE	APPROVE
X10-0X1		I	ECN 387	06/09/95	G.T

SEE DRAWING AND SPECIFICATION FOR THE FULL IMPORTANCE OF I/O INTERCONNECT INC. IS AND DOES NOT BE RESPONSIBLE FOR THE DESIGN OR MANUFACTURE OF THE PRODUCT. THE USER ASSUMES ALL LIABILITY FOR THE DESIGN AND MANUFACTURE OF THE PRODUCT. THE USER ASSUMES ALL LIABILITY FOR THE DESIGN AND MANUFACTURE OF THE PRODUCT.

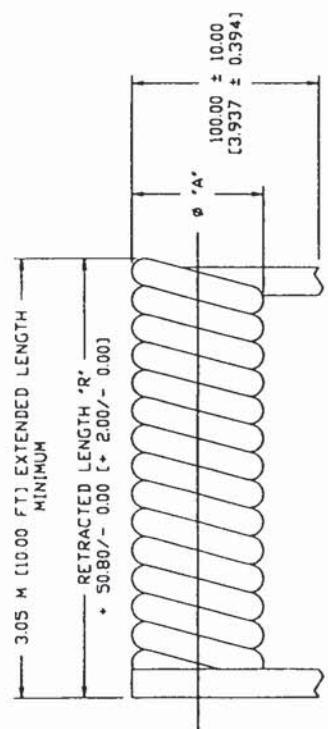

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED

- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	762.00	[30.000]	L=13.00" X W=35.00" X H=9.00"
5	812.80	[32.000]	L=13.00" X W=35.00" X H=9.00"
8	1066.80	[42.000]	L=13.00" X W=45.00" X H=9.00"
CONDUCTORS		MILLIMETERS	DIMENSION MAX.
NUMBER OF		RETRACTED LENGTH "R"	OUTSIDE SHIPPING BOX

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: Cptly
C: SANG
DATE: 06/09/95

TITLE: 25 AWG 42/0.12 (max) BARE COPPER 10.00 FT EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE

PART NO: 121-X10-0X1

CUSTOMER: I/O INTERCONNECT

REV: 1


SCALE: NONE SHEET 2 OF 2

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
X.X ± 0.20 (0.008)
X.XX ± 0.35 (0.250)

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. USA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE / REV.	DESCRIPTION	DATE	APPROV.
X10-020	D	ECN 387	06/09/95	G.T.

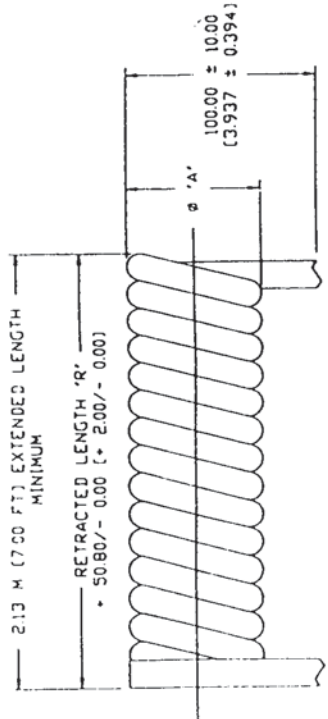

BUNDLE SPECIFICATION

- NOTES UNLESS OTHERWISE SPECIFIED.
- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BAG ALONG 3 SURFACES WITH TAPE

#	533.40	(21,000)	L=13.00' X W=25.00' X H=9.0
6	609.60	(24,000)	L=13.00' X W=25.00' X H=9.0
B	711.20	(28,000)	L=13.00' X W=30.00' X H=9.0
CONDUCTORS		MILLIMETERS	DIMENSION MAX.
NUMBER OF		RETRACTED LENGTH 'R'	OUTSIDE SHIPPING BOX

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: CAVI
C. VAN
CHKD: *Valley*

TITLE: 26 AVG (12/0.12 mm) BARE COP
7.00 FT. EXTENDED, NON-UL
UNSHIELDED, MODULAR CABLE

PART NO: 121-X10-020


CUSTOMER: I/O INTERCONNECT

SCALE: NONE SHEET 2 OF 07


THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
X.XX ± 6.35 (0.250)


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. NO PART OF THIS DRAWING OR SPECIFICATION IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

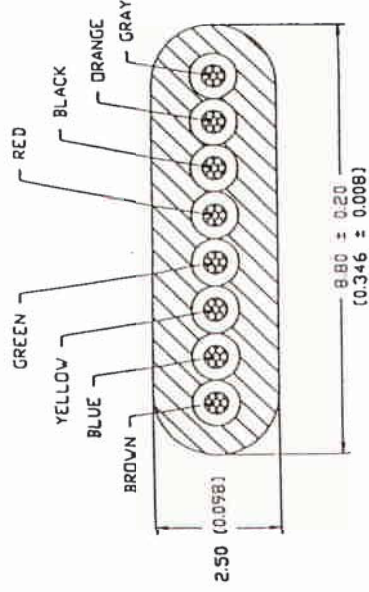

B. CONDUCTOR CABLE

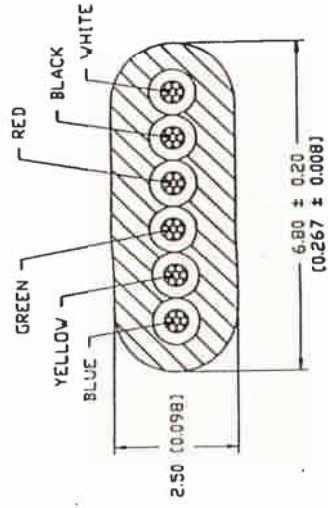

6. CONDUCTOR CABLE

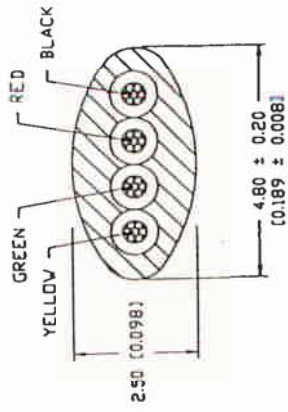

4. CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED:

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/0.12 mm) STRANDED BARE COPPER.
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

121-410-000	4	SILVER SATIN	0.551 ± 0.039
121-410-010	4	BLACK	14.00 ± 1.00
121-410-020	4	WHITE	0.551 ± 0.039
121-610-000	6	SILVER SATIN	14.00 ± 1.00
121-610-010	6	BLACK	0.551 ± 0.039
121-610-020	6	WHITE	14.00 ± 1.00
121-810-000	8	SILVER SATIN	0.551 ± 0.039
121-810-010	8	BLACK	14.00 ± 1.00
121-810-020	8	WHITE	0.551 ± 0.039
I/O INTERCONNECT PART NUMBER			0.748 ± 0.035
NUMBER OF CONDUCTORS			19.00 ± 1.00
COLOR			19.00 ± 1.00

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: CHM WANG
C: VANG
DATE: 06/09/95

TITLE: 26 AWG (12/0.12 mm) BARE COPPER 7.00 FT EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE


PART NO: 121-X10-0X0
CUSTOMER: I/O INTERCONNECT

SCALE: NONE
SHEET 1 OF 1


THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
X.X ± 0.20 (0.008)
X.XX ± 6.35 (0.250)


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. USA, AND SHALL NOT BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

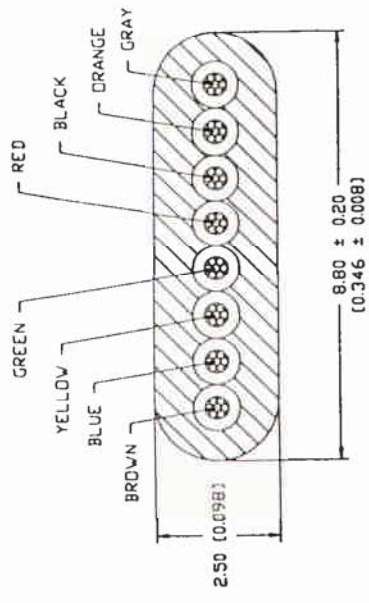

8 CONDUCTOR CABLE

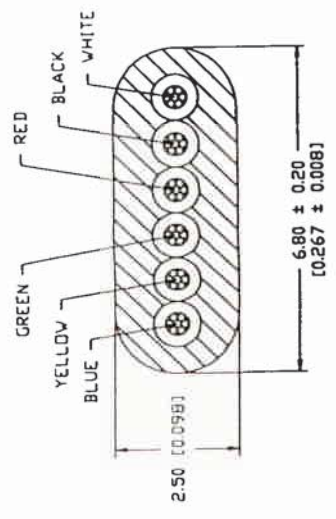

6 CONDUCTOR CABLE

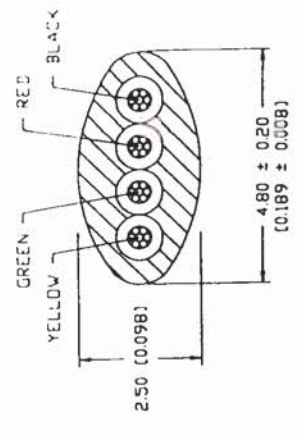

4 CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/012 mm) STRANDED BARE COPPER.
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

121-410-003	4	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-410-013	4	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-410-023	4	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-610-003	6	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-610-013	6	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-610-023	6	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-810-003	8	SILVER SATIN	[0.748] ± 0.0	19.00 ± 1.1
121-810-013	8	BLACK	[0.748] ± 0.0	19.00 ± 1.1
121-810-023	8	WHITE	[0.748] ± 0.0	19.00 ± 1.1
I/O INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø "A"	

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: TECH W/REV TITLE: 26 AWG (12/012 mm) BARE COPPER
C. VANG 06/09/95 5.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE


CHKD: *Kentley* PART NO: 121-X10-0X3
CUST: *[Signature]*
CMB: *[Signature]* CUSTOMER: I/O INTERCONNECT
CMB: *[Signature]* SCALE: NONE SHEET 1 OF 1

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
XXX ± 6.35 (0.250)

A		B		C		D		E		F		G		H	
ENG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED										
210-013		G	CON BACS	07/15/78	R.J.										

ALL DIMENSIONS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. ALL RIGHTS ARE RESERVED. NO PARTS OR MATERIALS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF I/O INTERCONNECT INC. OR ITS APPLICABLE SUBSIDIARIES.

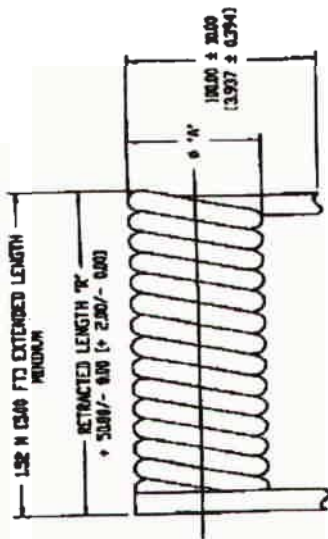

BUNDLE SPECIFICATION

NOTES UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
- 1.01 CONDUCTORS 26 AWG (0.712 mm) STAMPED BARE COPPER
- 1.02 INSULATION POLYPROPYLENE
- 1.03 COLOR PER CALLOUT
- 1.04 PACKAGING (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
- 2.01 TEMPERATURE & VOLTAGE RATING 80°C 30 V
- 2.02 CONDUCTORS RESISTANCE 140 OHMS/KM MAX AT 20°C
- 2.03 INSULATION RESISTANCE 100 MEGOHMS/KM MIN AT 20°C
- 2.04 CAPACITANCE IS 19 P/F/FT (600)
- 2.05 DIELECTRIC TEST: AC-50KV PER 1 MINUTE
- 3.0 PACKAGING SPECIFICATION
- 3.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE END SECTION.
- 3.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY TO BUNDLE OR 250 PILES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

CONDUCTORS	431.00	(17.000)	L=13.00" X W=28.00" X H=9.00"
NUMBER OF	457.20	(18.000)	L=13.00" X W=28.00" X H=9.00"
	509.60	(20.000)	L=13.00" X W=28.00" X H=9.00"
	609.60	(24.000)	L=13.00" X W=28.00" X H=9.00"
CONDUCTORS	MILLIMETERS		DIRECTION MAX.
NUMBER OF	RETRACTED LENGTH, IN		OUTSIDE SHIPPING BOX

FABRICATION BLOCK

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DATE: 07/15/78
DRAWN BY: [Signature]
CHECKED BY: [Signature]

PART NO: 12-100-000

QUANTITY: 431.00


REVISION: 1

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES (INCHES)
XXX ± 0.20 (0.008)
XXX ± 0.25 (0.010)


3.00 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE END SECTION.

3.01 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY TO BUNDLE OR 250 PILES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO DATA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

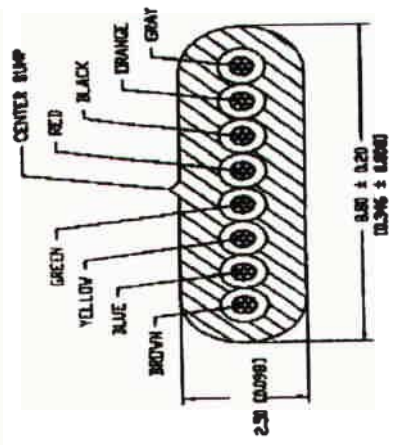


1. CONDUCTOR CABLE

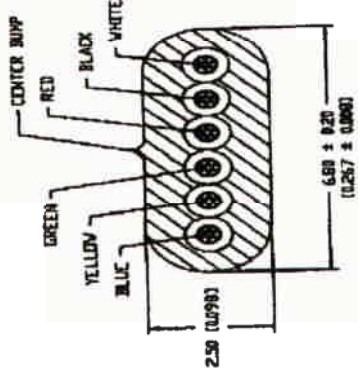

2. CONDUCTOR CABLE

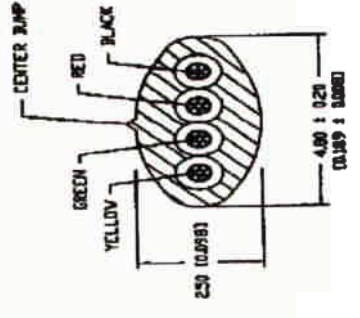

3. CONDUCTOR CABLE

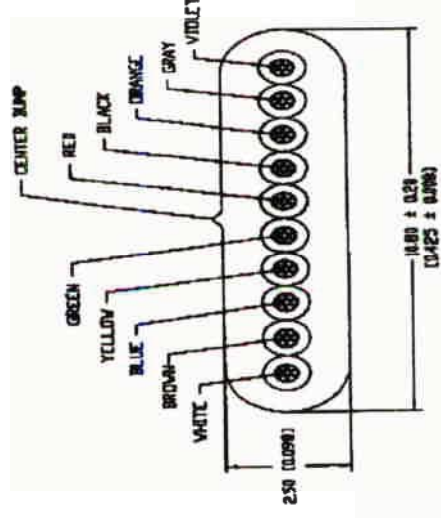

4. CONDUCTOR CABLE

I/O INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø IN
121-410-000	4	SILVER SATIN	0.551 ± 0.0293 14.00 ± 1.00
121-410-010	4	BLACK	0.551 ± 0.0293 14.00 ± 1.00
121-410-020	4	WHITE	0.551 ± 0.0293 14.00 ± 1.00
121-610-000	6	SILVER SATIN	0.551 ± 0.0293 14.00 ± 1.00
121-610-010	6	BLACK	0.551 ± 0.0293 14.00 ± 1.00
121-610-020	6	WHITE	0.551 ± 0.0293 14.00 ± 1.00
121-810-000	8	SILVER SATIN	0.748 ± 0.0293 19.00 ± 1.00
121-810-010	8	BLACK	0.748 ± 0.0293 19.00 ± 1.00
121-810-020	8	WHITE	0.748 ± 0.0293 19.00 ± 1.00
121-100-000	10	SILVER SATIN	0.748 ± 0.0293 19.00 ± 1.00
121-100-010	10	BLACK	0.748 ± 0.0293 19.00 ± 1.00
121-100-020	10	WHITE	0.748 ± 0.0293 19.00 ± 1.00
I/O INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø IN

I/O INTERCONNECT
 SANTA ANA, CALIFORNIA
 150 N. HIGWAY 101
 SANTA ANA, CALIFORNIA 92701
 714/241-1111
 FAX 714/241-1112

THIS ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN MILLIMETER (DIMES)
 2) TOLERANCES
 XX ± 0.20 (0.008)
 XXX ± 0.25 (0.250)

PART NO. 121-110-010
 QTY 1000
 DATE 1/10/78
 REV. E
 I/O INTERCONNECT
 SHEET 1 OF 2

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru