

PTC Thermistors For Overload And Overcurrent Protection



FEATURES

- Different voltages to be chosen in function of the application
- Available in three mechanical versions:
 - 2322 66. 4.... naked discs
 - 2322 66. 5.... leaded and coated
 - 2322 66. 6.... taped, on reel (to diameter 12.5 mm)
- Wide range of trip and non-trip currents: from 17 mA up to 4.5 A for the trip current
- Wide range of resistance: from 0.3 Ω up to 3 kΩ
- Small ratio between trip and non-trip currents ($I_t/I_{nt} = 1.5$ at 25 °C)
- High maximum inrush current
- Excellent long term behaviour, also in humidity
- Leaded parts withstand mechanical stresses and vibration
- UL approved PTCs are guaranteed to withstand severe test programmes including:
 - long-life cycle tests (over 5000 trip cycles)
 - long-life storage tests (3000 hours at 250 °C)
 - electrical cycle tests at low ambient temperatures (–40 °C or 0 °C)
 - damp-heat and water immersion tests
 - overvoltage tests at up to 200% of rated voltage.
- UL file E148885 according to XGPU2 standard UL1434.

| QUICK REFERENCE DATA | | |
|----------------------------|------------|---------|
| PARAMETER | VALUE | UNIT |
| Switch temperature; note 1 | 140 | °C |
| Maximum voltage; note 2: | | |
| 2322 66. 5...4 | 20 | V (DC) |
| 2322 66. 4/5/6...1 | 30 to 60 | V (DC) |
| 2322 66. 4/5/6...2 | 145 | V (RMS) |
| 2322 66. 4/5/6...3 | 265 | V (RMS) |
| Temperature range: | | |
| 2322 66. 4/5/6...1 | –40 to +85 | °C |
| 2322 66. 4/5/6...2 | 0 to 70 | °C |
| 2322 66. 4/5/6...3 | 0 to 70 | °C |
| Climatic category: | | |
| 66. 4/5/6...1 | 40/125/56 | |
| 66. 4/5/6...2/3 | 25/125/56 | |

Notes

1. 2322 660 5 ...4 types, have a 155°C switch temperature.
2. 2322 660 4/5/6 ...3 types, have a 120 °C switch temperature.
3. Rated voltages are respectively:
 - 24 to 48 V (AC or DC)
 - 120 V (AC or DC)
 - 230 V (AC or DC).

APPLICATIONS

- Telecommunications
- Automotive systems
- Industrial electronics
- Consumer electronics
- Electronic data processing

DESCRIPTION

These directly heated thermistors have a positive temperature coefficient and are primarily intended for overload protection. They consist of a naked disc or with two tinned brass or copper clad steel leads and coated.

PACKAGING

All tape and reel specifications are in accordance with "IEC 60286-3".

**VERY LOW VOLTAGE TYPES 20 V**

| ELECTRICAL DATA AND ORDERING INFORMATION for 2322 66. 5...4; max. voltage = 20 V (ac or dc) ⁽¹⁾ | | | | | | | |
|---|-----------------------------------|--|---------------------------------------|--|-----------------------------|------------------------------------|-----------------|
| I_{nt} MAX. at 25 °C (mA) | I_t MIN. at 25 °C (mA) | R_{25} $\pm 20\%$ (Ω) | $I^{(4)}$ MAX. at 25 °C (mA) | I_{res} MAX. at V_{max} and 25 °C (mA) | DISSIP. FACTOR (mW/K) | TYPICAL $\varnothing D$ (mm) | CATALOG NUMBERS |
| 350 | 525 | 4.10 | 3.5 | 80 | 7.0 | 5 | 2322 660 53514 |
| 470 | 705 | 2.30 | 4.7 | 100 | 7.0 | 5 | 2322 660 54714 |
| 610 | 915 | 1.55 | 6.7 | 120 | 8.0 | 7 | 2322 661 56114 |
| 700 | 1050 | 1.20 | 7.7 | 125 | 8.0 | 7 | 2322 661 57014 |
| 900 | 1350 | 0.80 | 10 | 150 | 8.8 | 8.5 | 2322 661 59014 |
| 1200 | 1800 | 0.50 | 13 | 200 | 10.0 | 10.5 | 2322 662 51224 |
| 1600 | 2400 | 0.33 | 17 | 260 | 11.6 | 12.5 | 2322 662 51624 |
| 2200 | 3300 | 0.22 | 24 | 320 | 15.0 | 16.5 | 2322 663 52224 |
| 3000 | 4500 | 0.15 | 33 | 400 | 19.0 | 20.5 | 2322 664 53024 |

LOW VOLTAGE TYPES 30 - 60 V

| ELECTRICAL DATA AND ORDERING INFORMATION for 2322 66. 4/5/6...1; max. voltage = 30 to 60 V (ac or dc) ⁽¹⁾ | | | | | | | | | |
|---|---|--|--------------------|---------------------------------------|--|-----------------------------|------------------------------------|--------------------------------|----------------|
| $I_{nt}^{(2)}$ MAX. at 25 °C (mA) | $I_t^{(2)}$ MIN. at 25 °C (mA) | R_{25} $\pm 20\%$ (Ω) | V MAX. (V) | $I^{(4)}$ MAX. at 25 °C (mA) | I_{res} MAX. at V_{max} and 25 °C (mA) | DISSIP. FACTOR (mW/K) | TYPICAL $\varnothing D$ (mm) | CATALOG NUMBERS ⁽³⁾ | |
| | | | | | | | | BULK | TAPE ON REEL |
| 94 | 145 | 50 | 60 | 800 | 22 | 6.9 | 4.5 | 2322 660 59491 | 2322 660 69491 |
| 130 | 195 | 25 | 60 | 1200 | 25 | 6.9 | 4.5 | 2322 660 51311 | 2322 660 61311 |
| 180 | 270 | 13 | 30 | 1700 | 45 | 6.9 | 4.5 | 2322 660 51811 | 2322 660 61811 |
| 270 | 405 | 6 | 30 | 2500 | 60 | 6.9 | 4.5 | 2322 660 52711 | 2322 660 62711 |
| 320 | 480 | 5 | 30 | 3500 | 62 | 7.8 | 6.5 | 2322 661 53211 | 2322 661 63211 |
| 410 | 615 | 3 | 30 | 4500 | 65 | 7.8 | 6.5 | 2322 661 54111 | 2322 661 64111 |
| 470 | 705 | 2.5 | 30 | 5000 | 70 | 8.8 | 8.0 | 2322 661 54711 | 2322 661 64711 |
| 540 | 810 | 1.9 | 30 | 6000 | 75 | 8.8 | 8.0 | 2322 661 55411 | 2322 661 65411 |
| 610 | 915 | 1.7 | 30 | 7000 | 80 | 9.9 | 10 | 2322 662 56111 | 2322 662 66111 |
| 700 | 1050 | 1.3 | 30 | 8000 | 90 | 9.9 | 10 | 2322 662 57011 | 2322 662 67011 |
| 830 | 1245 | 1.1 | 30 | 10000 | 100 | 11.5 | 12 | 2322 662 58311 | 2322 662 68311 |
| 920 | 1380 | 0.9 | 30 | 11000 | 105 | 11.5 | 12 | 2322 662 59211 | 2322 662 69211 |
| 1 170 | 1755 | 0.7 | 30 | 13500 | 140 | 14.5 | 16 | 2322 663 51121 | - |
| 1390 | 2085 | 0.5 | 30 | 16000 | 170 | 14.5 | 16 | 2322 663 51321 | - |
| 1770 | 2655 | 0.4 | 30 | 20000 | 200 | 18.7 | 20 | 2322 664 51721 | - |
| 2050 | 3075 | 0.3 | 30 | 23000 | 220 | 18.7 | 20 | 2322 664 52021 | - |

Notes

1. The thermistors are clamped at the seating plane.
2. For leadless types the values given for I_{nt} and I_t are only valid for thermistors mounted in accordance with "IEC 60738". Thermistor dissipation depends on mounting and can slightly affect the typical values.
3. For leadless types replace the 8th digit in the catalog numbers by 4.
4. I_{max} is the maximum overload current that may flow through the PTC when it passes from the low ohmic to the high ohmic state.



MAINS VOLTAGE TYPES 145 V

| ELECTRICAL DATA AND ORDERING INFORMATION for 2322 66. 4/5/6...2; max. voltage = 145 V (ac or dc) ⁽¹⁾ | | | | | | | | |
|--|--|--------------------------------|----------------------------------|--|-----------------------------|-----------------------|--------------------------------|----------------|
| I _{nt} (2) MAX. at 25 °C (mA) | I _t (2) MIN. at 25 °C (mA) | R ₂₅ ±20% (Ω) | I(4) MAX. at 25 °C (mA) | I _{res} MAX. at V _{max} and 25 °C (mA) | DISSIP. FACTOR (mW/K) | TYPICAL ØD (mm) | CATALOG NUMBERS ⁽³⁾ | |
| | | | | | | | BULK | TAPE ON REEL |
| 47 | 70 | 240 | 200 | 9 | 7.3 | 4.5 | 2322 660 54792 | 2322 660 64792 |
| 65 | 100 | 115 | 300 | 11 | 7.3 | 4.5 | 2322 660 56592 | 2322 660 66592 |
| 93 | 140 | 55 | 450 | 13 | 7.3 | 4.5 | 2322 660 59392 | 2322 660 69392 |
| 110 | 165 | 40 | 500 | 13 | 7.3 | 4.5 | 2322 660 51112 | 2322 660 61112 |
| 130 | 195 | 28 | 600 | 13 | 7.3 | 4.5 | 2322 660 51312 | 2322 660 61312 |
| 170 | 255 | 19 | 1000 | 15 | 8.3 | 6.5 | 2322 661 51712 | 2322 661 61712 |
| 210 | 315 | 12 | 1400 | 15 | 8.3 | 6.5 | 2322 661 52112 | 2322 661 62112 |
| 250 | 375 | 9.4 | 2000 | 16.5 | 9 | 8.0 | 2322 661 52512 | 2322 661 62512 |
| 270 | 405 | 8 | 2200 | 16.5 | 9 | 8.0 | 2322 661 52712 | 2322 661 62712 |
| 320 | 480 | 6.7 | 3000 | 19 | 10.5 | 10 | 2322 662 53212 | 2322 662 63212 |
| 360 | 540 | 5.3 | 3500 | 19 | 10.5 | 10 | 2322 662 53612 | 2322 662 63612 |
| 410 | 615 | 4.6 | 4500 | 22.5 | 11.7 | 12 | 2322 662 54112 | 2322 662 64112 |
| 450 | 675 | 3.8 | 5000 | 22.5 | 11.7 | 12 | 2322 662 54512 | 2322 662 64512 |
| 600 | 900 | 2.9 | 7200 | 28.5 | 15.5 | 16 | 2322 663 56012 | - |
| 710 | 1065 | 2.1 | 8500 | 28.5 | 15.5 | 16 | 2322 663 57112 | - |
| 880 | 1320 | 1.7 | 11000 | 37.5 | 19.8 | 20 | 2322 664 58812 | - |
| 1000 | 1500 | 1.3 | 13000 | 37.5 | 19.8 | 20 | 2322 664 51022 | - |

MAINS VOLTAGE TYPES 265 V


| ELECTRICAL DATA AND ORDERING INFORMATION for 2322 66. 4/5/6...3; max. voltage = 265 V (ac or dc) ⁽¹⁾ | | | | | | | | |
|--|--|--------------------------------|----------------------------------|--|-----------------------------|-----------------------|--------------------------------|----------------|
| I _{nt} (2) MAX. at 25 °C (mA) | I _t (2) MIN. at 25 °C (mA) | R ₂₅ ±25% (Ω) | I(4) MAX. at 25 °C (mA) | I _{res} MAX. at V _{max} and 25 °C (mA) | DISSIP. FACTOR (mW/K) | TYPICAL ØD (mm) | CATALOG NUMBERS ⁽³⁾ | |
| | | | | | | | BULK | TAPE ON REEL |
| 11 | 17 | 3000 | 80 | 6.5 | 7.3 | 4.5 | 2322 660 51193 | 2322 660 61193 |
| 15 | 23 | 1900 | 110 | 6.5 | 7.3 | 4.5 | 2322 660 51593 | 2322 660 61593 |
| 19 | 29 | 1200 | 140 | 6.5 | 7.3 | 4.5 | 2322 660 51993 | 2322 660 61993 |
| 28 | 42 | 500 | 200 | 6.8 | 7.3 | 4.5 | 2322 660 52893 | 2322 660 62893 |
| 39 | 59 | 260 | 300 | 6.8 | 7.3 | 4.5 | 2322 660 53993 | 2322 660 63993 |
| 63 | 95 | 120 | 450 | 7 | 7.3 | 4.5 | 2322 660 56393 | 2322 660 66393 |
| 76 | 115 | 85 | 550 | 7 | 7.3 | 4.5 | 2322 660 57693 | 2322 660 67693 |
| 95 | 143 | 56 | 600 | 7 | 7.3 | 4.5 | 2322 660 59593 | 2322 660 69593 |
| 110 | 165 | 48 | 650 | 7.5 | 8.3 | 6.5 | 2322 661 51113 | 2322 661 61113 |
| 140 | 210 | 29 | 800 | 8 | 8.3 | 6.5 | 2322 661 51413 | 2322 661 61413 |
| 170 | 255 | 22 | 900 | 9 | 9 | 8.0 | 2322 661 51713 | 2322 661 61713 |
| 190 | 285 | 18 | 1000 | 9.5 | 9 | 8.0 | 2322 661 51913 | 2322 661 61913 |
| 210 | 315 | 17 | 1300 | 10 | 10.5 | 10 | 2322 662 52113 | 2322 662 62113 |
| 250 | 375 | 12 | 1500 | 11 | 10.5 | 10 | 2322 662 52513 | 2322 662 62513 |
| 280 | 420 | 11 | 1800 | 12 | 11.7 | 12 | 2322 662 52813 | 2322 662 62813 |
| 320 | 480 | 8.4 | 2200 | 13 | 11.7 | 12 | 2322 662 53213 | 2322 662 63213 |
| 400 | 600 | 6.6 | 3000 | 15 | 15.5 | 16 | 2322 663 54013 | - |
| 490 | 735 | 4.4 | 3500 | 16 | 15.5 | 16 | 2322 663 54913 | - |
| 590 | 855 | 4 | 4500 | 19.5 | 19.8 | 20 | 2322 664 55913 | - |
| 700 | 1050 | 2.8 | 5500 | 21 | 19.8 | 20 | 2322 664 57013 | - |
| 800 | 1200 | 2.1 | 5500 | 22.5 | 19.8 | 20 | 2322 664 58013(5) | - |

Notes

1. The thermistors are clamped at the seating plane.
2. For leadless types the values given for I_{nt} and I_t are only valid for thermistors mounted in accordance with "IEC 60738". Thermistor dissipation depends on mounting and can slightly affect the typical values.
3. For leadless types replace the 8th digit in the catalog numbers by 4.
4. I_{max} is the maximum overload current that may flow through the PTC when it passes from the low ohmic to the high ohmic state.
5. Not UL approved.



DIMENSIONS in millimeters

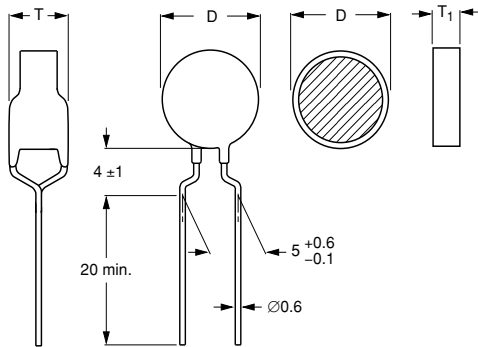


| THICKNESS DIMENSIONS AND CATALOG NUMBERS | | |
|---|-------------------|---|
| T₁ MAX. | T MAX. | CATALOG NUMBERS 2322 |
| N.A. | 3.0 | 66. 5...4 |
| 1.7 | 4.0 | 66. 4/5...1 |
| 2.8 | 5.0 | 66. 4/5...2 |
| 3.2 | 5.5 | 66. 4/5...3 |


Component outline for 2322 66. 4/5...1/2/3.

| DEVICE AND TAPE DIMENSIONS, PACKAGING AND CATALOG NUMBERS in millimeters | | | | | |
|---|-------------------------------|-------------------------------|---|--|---|
| D MAX. | H₁ MAX. | H₃ MAX. | PACKAGING AND CATALOG NUMBERS 2322 | | |
| | | | NAKED | LEADED BULK | LEADED TAPED |
| 5 | 26 | 9.5 | 660 49491; 660 41311; 660 41811; 660 42711; 660 44792; 660 46592; 660 49392; 660 41112; 660 41312; 660 41193; 660 41593; 660 41993; 660 42893; 660 43993; 660 46393; 660 47693; 660 49593 | 660 59491; 660 51311; 660 51811; 660 52711; 660 54792; 660 56592; 660 59392; 660 51112; 660 51312; 660 51193; 660 51593; 660 51993; 660 52893; 660 53993; 660 56393; 660 57693; 660 53514; 660 54714; 660 59593 | 660 69491; 660 61311; 660 61811; 660 62711; 660 64792; 660 66592; 660 69392; 660 61112; 660 61312; 660 61193; 660 61593; 660 61993; 660 62893; 660 63993; 660 66393; 660 67693; 660 69593 |
| 7 | 28 | 11.5 | 661 43211; 661 44111; 661 41712; 661 42112; 661 41113; 661 41413 | 661 53211; 661 54111; 661 51712; 661 52112; 661 51113; 661 51413; 661 56114; 661 57014 | 661 63211; 661 64111; 661 61712; 661 62112; 661 61113; 661 61413 |
| 8.5 | 29.5 | 13.0 | 661 44711; 661 45411; 661 42512; 661 42712; 661 41713; 661 41913 | 661 54711; 661 55411; 661 52512; 661 52712; 661 51713; 661 51913; 661 59014 | 661 64711; 661 65411; 661 62512; 661 62712; 661 61713; 661 61913 |
| 10.5 | 31.5 | 15.0 | 662 46111; 662 47011; 662 43212; 662 43612; 662 42113; 662 42513 | 662 56111; 662 57011; 662 53212; 662 53612; 662 52113; 662 52513; 662 51224 | 662 66111; 662 67011; 662 63212; 662 63612; 662 62113; 662 62513 |
| 12.5 | 32.5 | 17.0 | 662 48311; 662 49211; 662 44112; 662 44512; 662 42813; 662 43213 | 662 58311; 662 59211; 662 54112; 662 54512; 662 52813; 662 53213; 662 51624 | 662 68311; 662 69211; 662 64112; 662 64512; 662 62813; 662 63213 |
| 16.5 | - | - | 663 41121; 663 41321; 663 46012; 663 47112; 663 44013; 663 44913 | 663 51121; 663 51321; 663 56012; 663 57112; 663 54013; 663 54913; 663 52224 | - |
| 20.5 | - | - | 664 41721; 664 42021; 664 48812; 664 41022; 664 45913; 664 47013 | 664 51721; 664 52021; 664 58812; 664 51022; 664 55913; 664 57013; 664 53024 | - |

I_{MAX} AS A FUNCTION OF VOLTAGE.

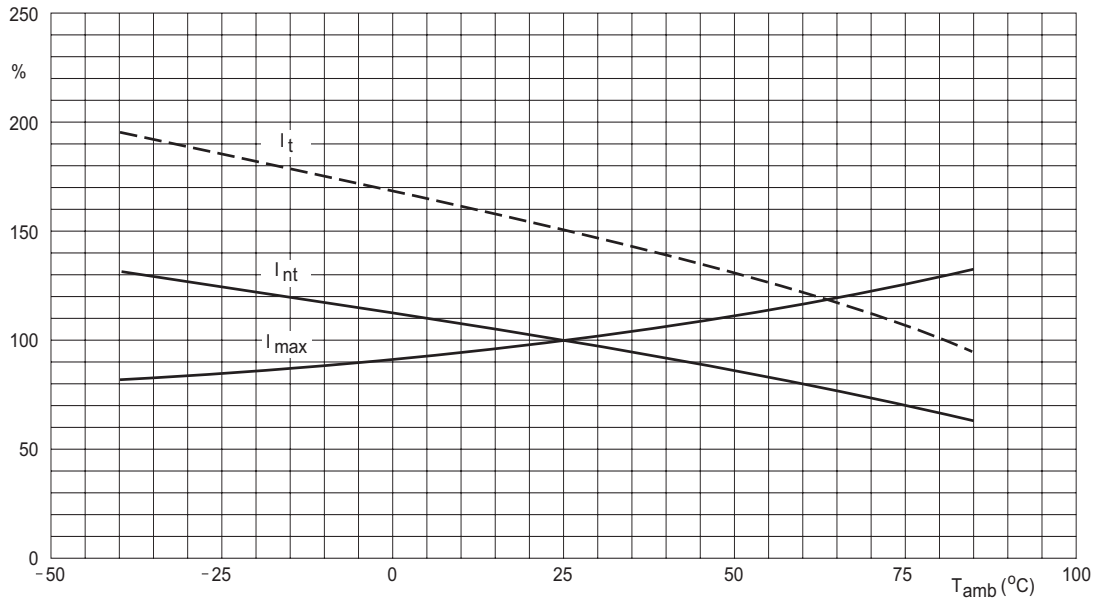

CURRENT DEVIATION AS A FUNCTION OF THE AMBIENT TEMPERATURE.

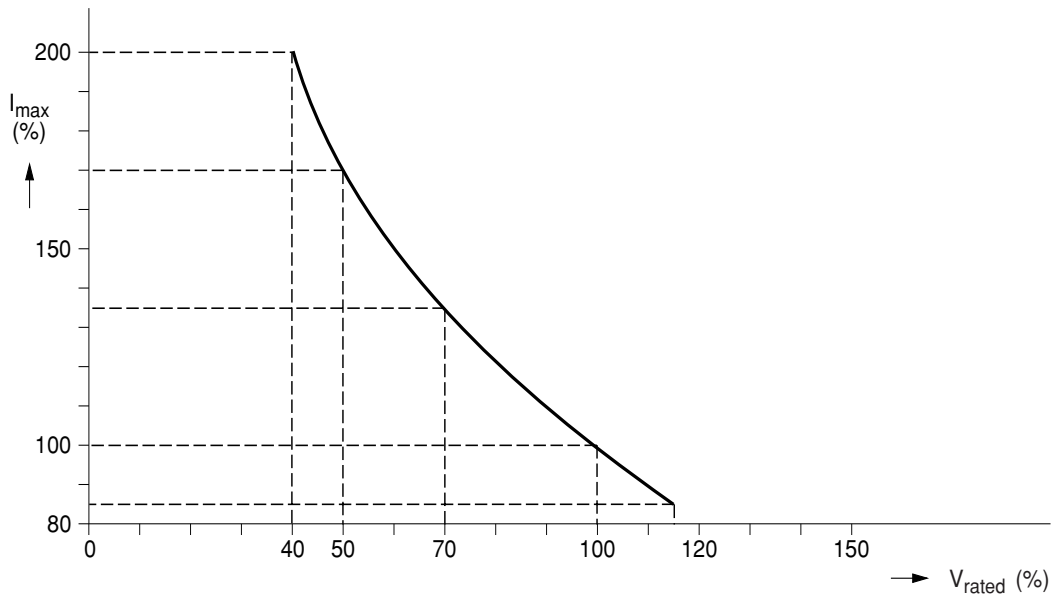

I_{max} as stated in the Electrical data and ordering information tables, is the maximum overload current that may flow through the PTC when passing from the low ohmic to high ohmic state at rated voltage.

When other voltages are present after tripping, the I_{max} value can be derived from the above I_{max} as a function of voltage graph. Voltages below V_{rated} will allow higher overload currents to pass the ptc.

Example

What maximum overload current is allowed for a thermistor type 2322 662 52513 at 0 °C and a maximum voltage after tripping of 180 V_{RMS} :


I_{max} at 230 V and 25 °C = 1.5 A_{RMS} : see electrical data and ordering information for 2322 66. 4/5/6...3; max. voltage = 265 V (ac or dc) table.

I_{max} at 180 V and 25 °C = 1.85 A_{RMS} (180 V_{RMS} = 78% of 230 V_{RMS} gives 123% of I_{max}).

At 0 °C this gives 1.68 A_{RMS} maximum overload current. See Current deviation as a function of the ambient temperature drawing.




TYPICAL TRIP-TIME AS A FUNCTION OF TRIP CURRENT RATIO for 30 to 60 volt types.

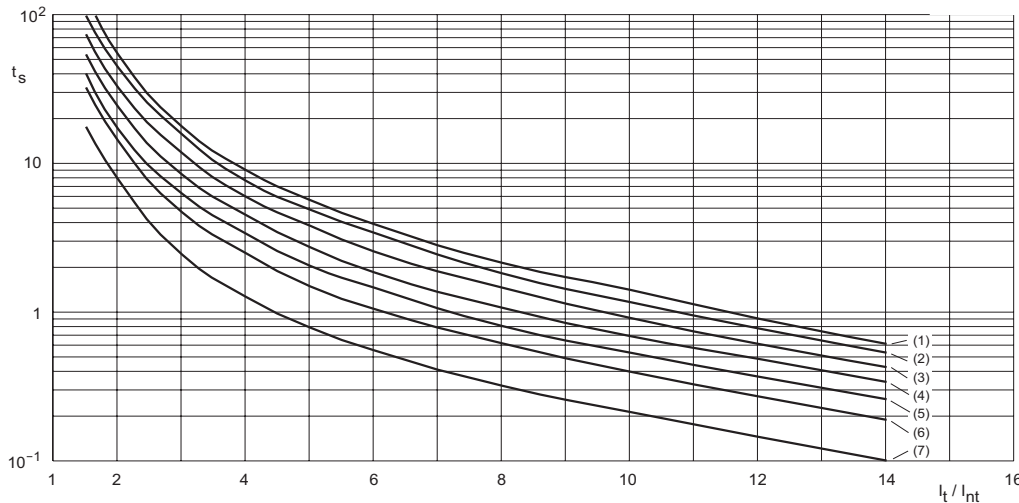

Curve 1: typical $\varnothing D = 20$ mm.
 Curve 2: typical $\varnothing D = 16$ mm.
 Curve 3: typical $\varnothing D = 12.0$ mm.
 Curve 4: typical $\varnothing D = 10.0$ mm.
 Curve 5: typical $\varnothing D = 8.0$ mm.
 Curve 6: typical $\varnothing D = 6.5$ mm.
 Curve 7: typical $\varnothing D = 4.5$ mm.
 Measured in accordance with "IEC 60738".
 For an example, see "Trip-time or switching time (t_s)".

TYPICAL TRIP-TIME AS A FUNCTION OF TRIP CURRENT RATIO for 145 and 265 volt types.

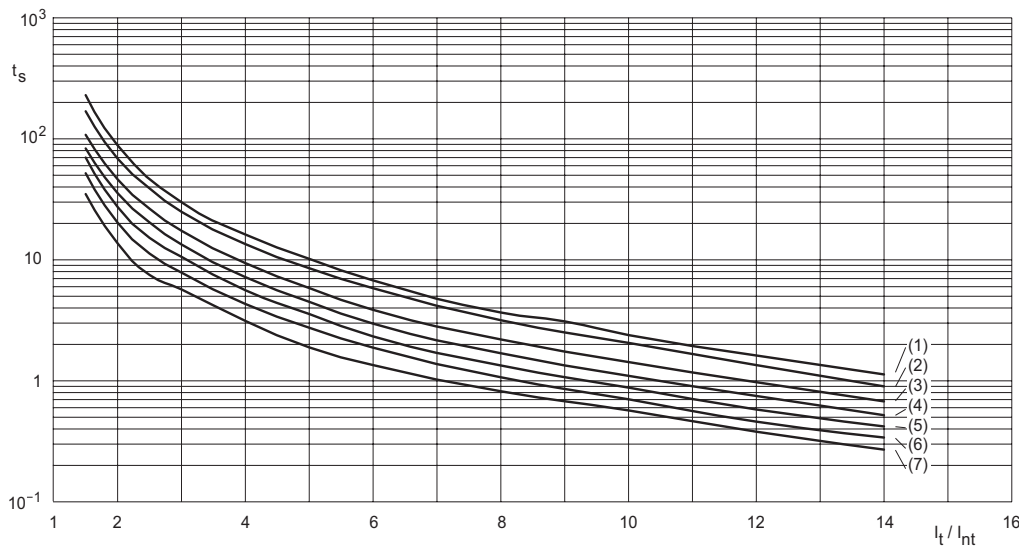

Curve 1: typical $\varnothing D = 20.0$ mm.
 Curve 2: typical $\varnothing D = 16.0$ mm.
 Curve 3: typical $\varnothing D = 12.0$ mm.
 Curve 4: typical $\varnothing D = 10.0$ mm.
 Curve 5: typical $\varnothing D = 8.0$ mm.
 Curve 6: typical $\varnothing D = 6.5$ mm.
 Curve 7: typical $\varnothing D = 4.5$ mm.
 Measured in accordance with "IEC 60738".
 For an example, see "Trip-time or switching time (t_s)".

Trip-time or switching time (t_s)

To check the trip-time for a specific PTC, refer to the Electrical Data and Ordering Information tables for the value I_{nt} . Divide the overload or trip current by this I_{nt} and you realize the factor I_t/I_{nt} . This rule is valid for any ambient temperature between 0 and 70 °C. Adapt the correct non-trip current with the appropriate curve in the Current Deviation as a Function of the Ambient Temperature graph. The relationship between the I_t/I_{nt} factor and the switching time is a function of the PTC diameter; see the above graphs.

Example

What will be the trip-time at $I_{ol} = 3$ A and $T_{amb} = 0$ °C of a thermistor type 2322 661 54711; 2.5Ω ; $\varnothing D = 8.0$ mm:


I_{nt} from Table 1: 470 mA at 25 °C

I_{nt} : $470 \times 1.12 = 526$ mA (0 °C).


Overload current = 3 A; factor I_t/I_{nt} : $\sqrt[3]{0.526} = 5.70$. In the typical trip-time as a function of trip current ratio for 30 to 60 volt types graph, at the 8.0 mm line and $I_t/I_{nt} = 5.70$, the typical trip-time is 1.7 s.




TYPICAL R/T CHARACTERISTICS
TYPICAL RESISTANCE/TEMPERATURE
CHARACTERISTIC for 2322 660 53514.

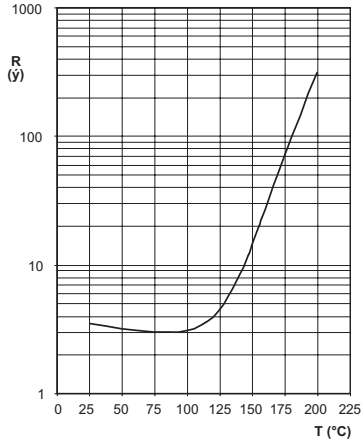


TYPICAL RESISTANCE/TEMPERATURE
CHARACTERISTIC for 2322 660 54714.

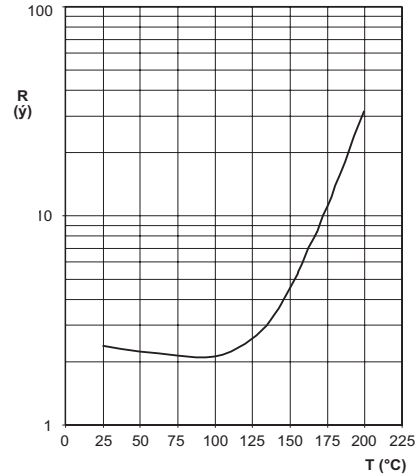


TYPICAL RESISTANCE/TEMPERATURE
CHARACTERISTIC for 2322 660 54714.

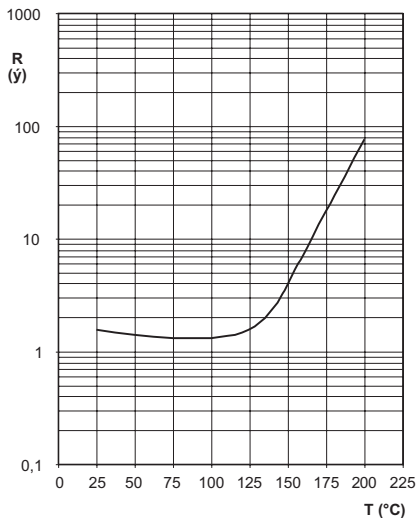


TYPICAL RESISTANCE/TEMPERATURE
CHARACTERISTIC for 2322 661 57014.

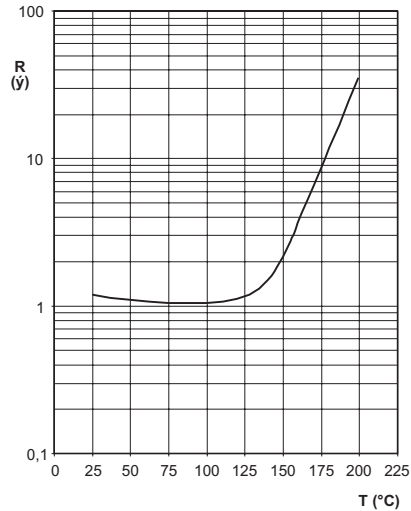

TYPICAL RESISTANCE/TEMPERATURE
CHARACTERISTIC for 2322 661 59014.

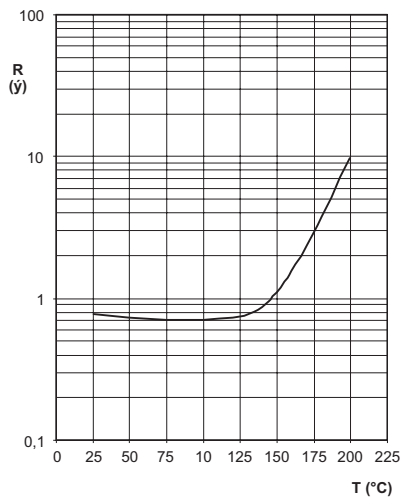


TYPICAL RESISTANCE/TEMPERATURE
CHARACTERISTIC for 2322 662 51224.

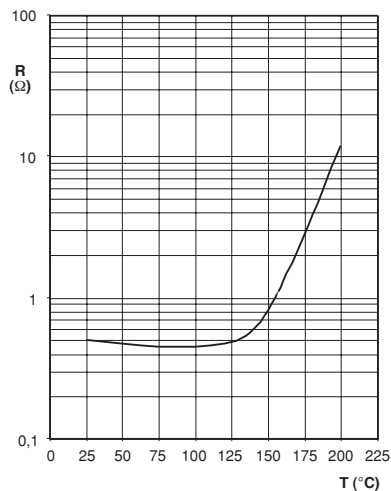





TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 662 51624.

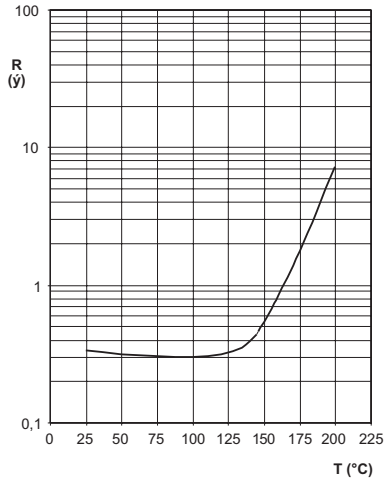


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 663 52224.

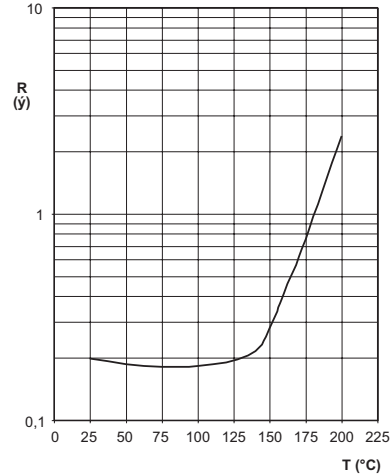


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 660 59491/51311.

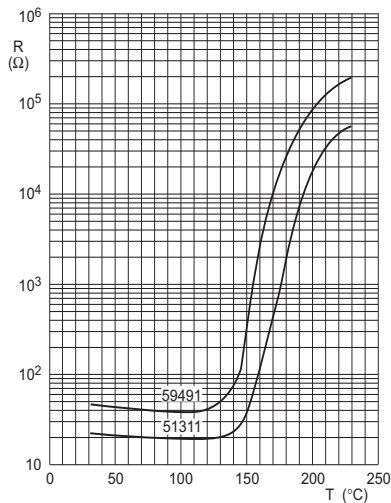


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 660 51811/52711 and 661 53211.

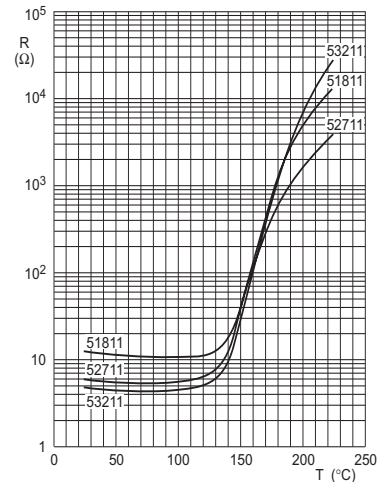

TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 662 56111/57011/58311.

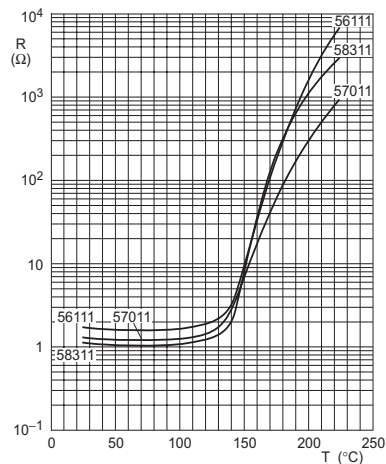


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 662 59211 and 663 51121/51321.

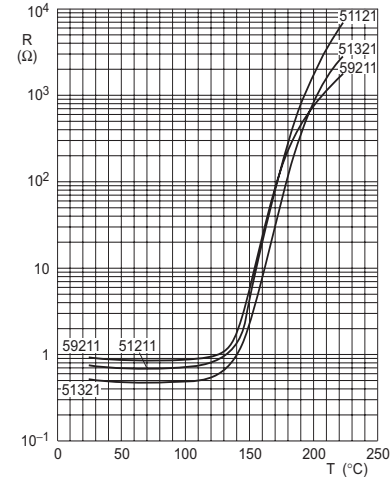





TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 661 54111/54711/55411.

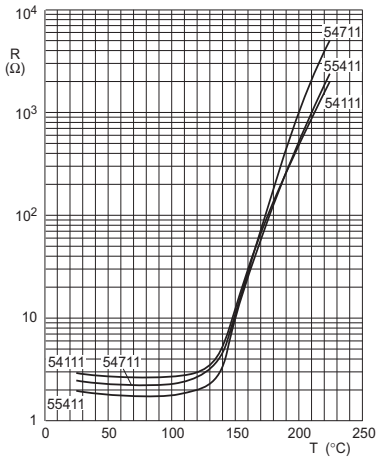


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 664 51721/52021.

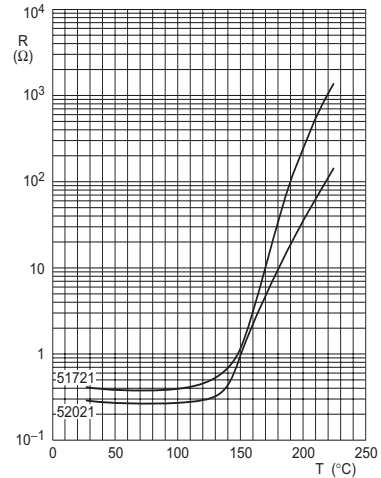


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 660 54792/56592/59392.

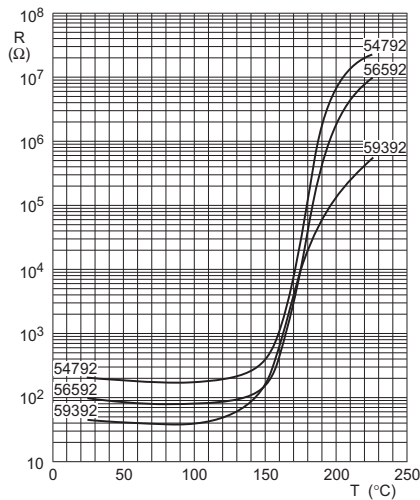


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 661 52112/52512/52712.

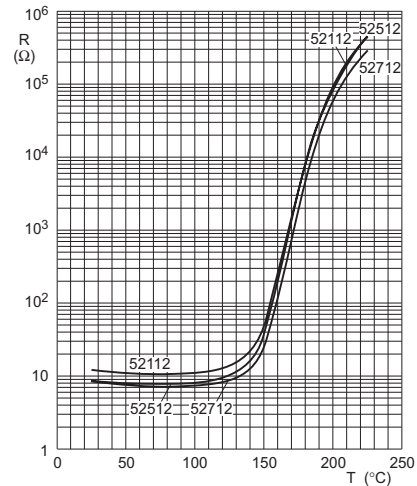

TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 660 51112/51312 and 661 51712.

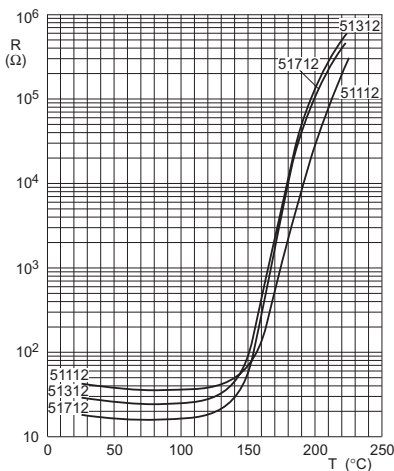


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 662 53212/53612/54112.

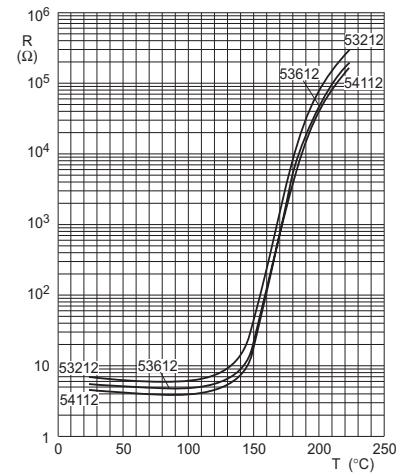





TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 662 54512 and 663 56012/57112.

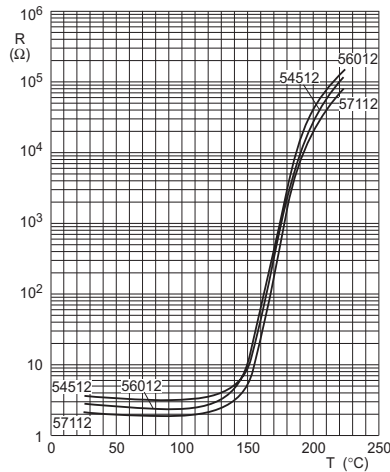


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 661 54111/54711/55411.

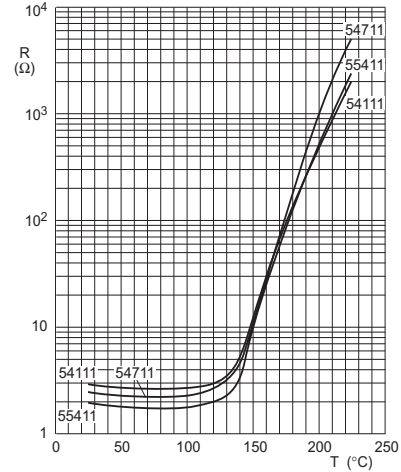


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 660 51193/51593/51993.

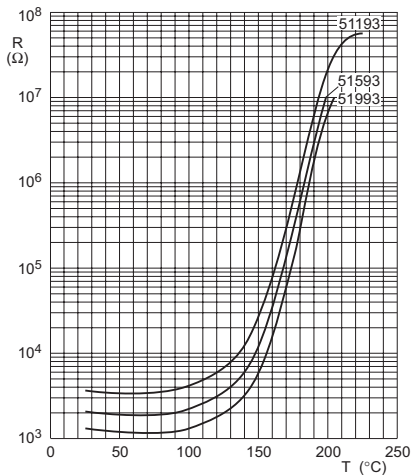


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 664 58812/51022.

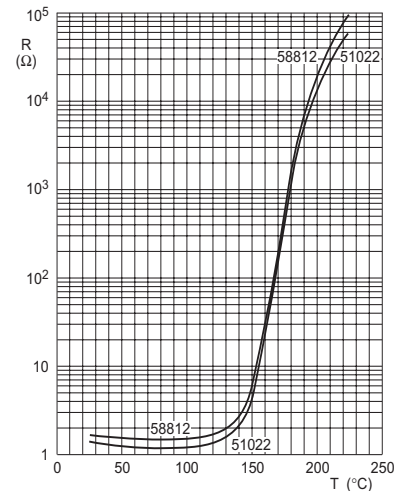

TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 660 57693/59593 and 661 51113.

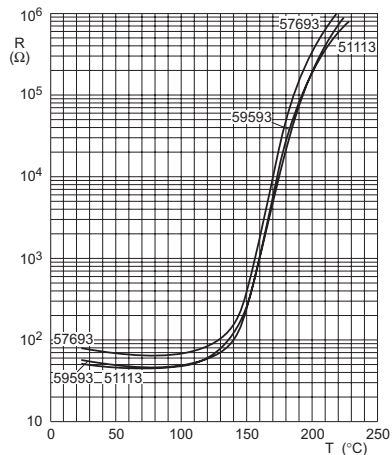


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 660 52893/53993/56393.

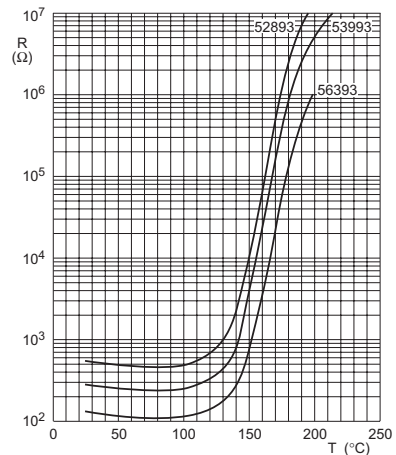





TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 662 52113/52513/52813.

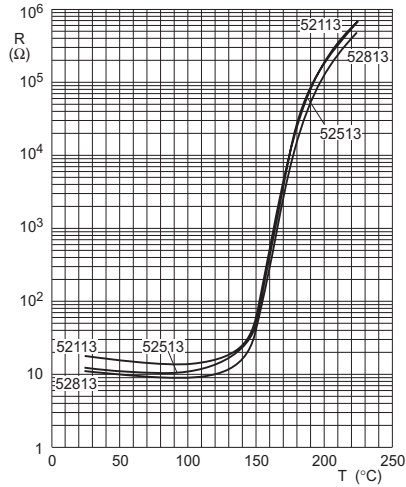


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 661 51413/51713/51913.

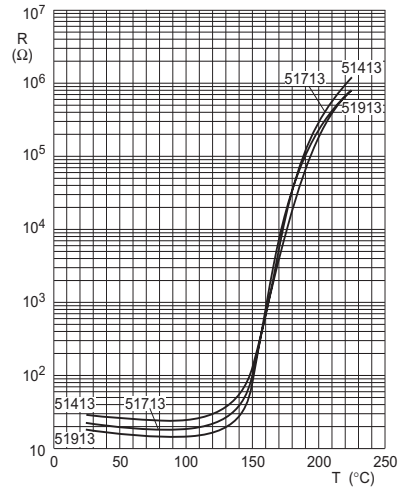

TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 664 55913/57013.

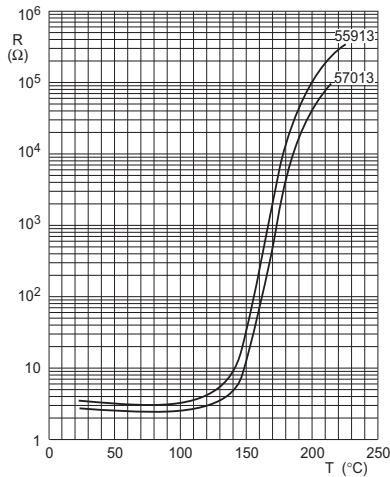


TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC for 2322 662 53213 and 663 54013/54913.

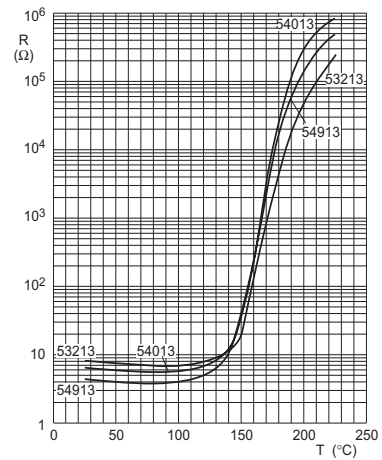

| CHARACTERISTICS CONCERNING TAPED THERMISTORS | |
|---|---------------|
| PARAMETER | VALUE |
| Minimum pull out force of the component | 5 N |
| Minimum pull off force of adhesive tape | 6 N |
| Minimum tearing force tape | 15 N |
| Maximum pull off force tape-reel | 5 N |
| Storage conditions | |
| Storage temperature range | -25 to +40 °C |
| Maximum relative humidity | 80% |




TAPE SPECIFICATIONS in millimeters

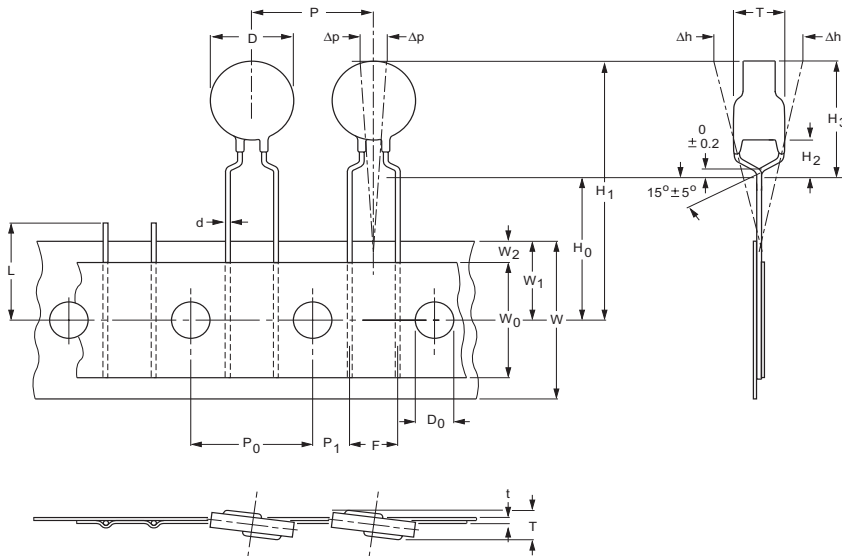

Thermistors on tape for 2322 66. 6...1/2/3.

REEL SPECIFICATIONS in millimeters

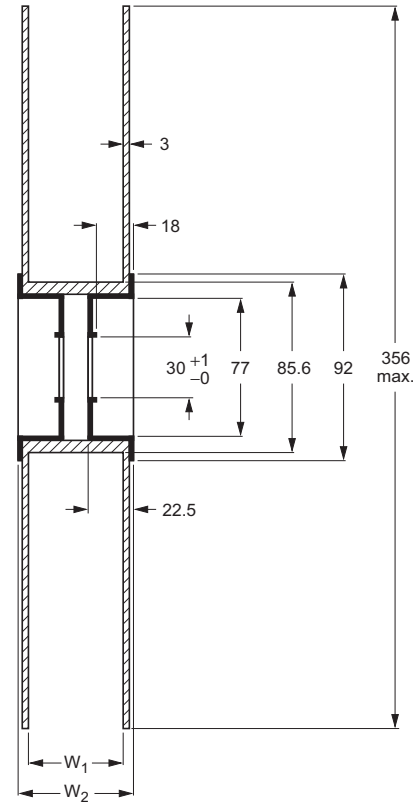

Dimensions of the reel for 2322 66. 6...1/2/3.

| REEL DIMENSIONS in millimeters | | |
|---------------------------------------|----------------|---------------------|
| DIAMETER Ø | W ₁ | W ₂ MAX. |
| <12 | 42 ±1 | 56 |
| 12 | 46 ±1 | 60 |

TAPE AND OTHER DEVICE DIMENSIONS IN MILLIMETERS

| SYMBOL | PARAMETER | DIMENSIONS | TOLERANCE | REMARKS |
|----------------|---------------------------------|--------------------------------------|--------------|---|
| D | body diameter | see Device and Tape Dimensions table | ±0.5 | |
| T | total maximum thickness | see Thickness Dimesions table | | |
| d | lead diameter | 0.6 | ±10% | |
| P | pitch between thermistors: | | | |
| | Ø < 12 mm | 12.7 | ±1 | |
| | Ø ≥ 12 mm | 25.4 | ±2 | |
| P ₀ | feed hole pitch | 12.7 | ±0.3 | cumulative pitch error ±1 mm/20 pitches |
| P ₁ | feed hole centre to lead centre | 3.81 | ±0.7 | guaranteed between component and tape |
| Δh | component alignment | 0 | ±1.3 | |
| F | lead to lead distance | 5 | +0.6 to -0.1 | guaranteed between component and tape |
| Δh | component alignment | 0 | ±2 | |
| W | tape width | 18 | +1 to -0.5 | |
| W ₀ | hold down tape width | ≥12.3 | - | |
| W ₁ | hole position | 9 | ±0.5 | |
| W ₂ | hold down tape position | ≤3.0 | - | |
| H ₁ | component height | see Device and Tape Dimensions table | | |
| H ₂ | component body to seating plane | 4 | ±1 | |
| H ₃ | component top to seating plane | see Device and Tape Dimensions table | | |
| H ₀ | lead-wire clinch height | 16 | ±0.5 | |
| D ₀ | feed hole diameter | 4 | ±0.2 | |
| t | total tape thickness | ≤0.9 | - | with cardboard tape 0.5 ±0.1 mm |
| L | length of snapped lead | ≤11 | - | |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru