

DC/DC Product Specification

Embedded Power for
Business-Critical Continuity

- 1/16th brick fully regulated DCDC converter.

AVD50-48S05

1/16th brick

Input voltage: 36-75V
Single Output: 5V
Rated power: 50W



Rev 30.08.2012
AVD50 series
1 of 2

Product Description

The AVD50-48S05 is the latest high efficiency 1/16th brick. It operates from a wide input range of 36Vdc to 75Vdc and provides a regulated output voltage of 5Vdc. The output is rated to a power level up to 50Watts maximum. Its protection features include non latching OCP, OTP and OVP. It also has an enable pin on the primary side of the converter. The unit is an open frame design with baseplate option that is optimised for either contact-cooled applications or forced airflow applications.

Specifications

Feature	
Output power:	50W
Super high efficiency:	90.5%(5V)
Functions:	Remote control, trim function, Sense; Input LVP, output OVP and OCP, OTP Open frame structure with base plate option.
Isolation:	Basic Insulation
Safety	
UL:	UL60950
TUV/CE:	IEC/EN60950
Input specification	
Input range	36Vdc to 75Vdc
Input Surge	100V for 100mSec
Control specification	
Enable	TTL compatible Positive or Negative enable
Output specification	
Output Voltage	5V dc
Trim range	+10% to -20% Vout
Output Current	10A
Ripple and noise	50mV pk-pk
Regulation	Load regulation = 25.5mV, Line regulation = 10mV
Switching Frequency	Fixed switching frequency 250Khz
Isolation Voltage	1500Vdc
Transient response.	150mV deviation 100uS recovery (50%-75% Iout)

Environmental Specification

Storage Temperature	-55 to +125 deg C
Ambient operating temp	-40 to +85 deg C
MTBF at 25degC	2 Million hours (48V, Io=20A)
OTP	125 deg C

Special Features

- 2:1 Wide input range
- Optimised for High density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Pre-bias start-up capability
- Basic insulation system
- Through hole or SMT termination
- Openframe structure

Safety

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

DC/DC Product Specification

Embedded Power for
Business-Critical Continuity


- 1/16th brick fully regulated DCDC converter.

Rev 30.08.2012

AVD50 series

2 of 2

Mechanical

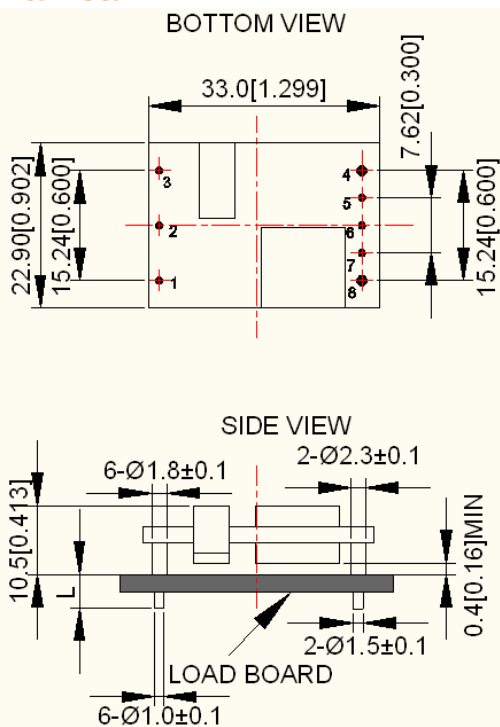

UNIT: mm[inch]

BOTTOM VIEW: pin on

TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	- Sense
6	Trim
7	+Sense
8	+V out

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 (760) 930 4600
Facsimile: +1 (760) 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.powerconversion.com

techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2008 Emerson Electric Co.



EMERSON
Network Power

Ordering information

Input voltage	Output voltage	Output current	Efficiency	Part number
48V	5V	10A	90.5%	AVD50-48S05SL
48V	5V	10A	90.5%	AVD50-48S05-6L
48V	5V	10A	90.5%	AVD50-48S05P-6L

Notes

- Standard converter is Negative enable
- '-6' = 3.8mm pin length.
- '-S' = Surface mount, tray package
- '-L' = RoHS-6 compliant.
- '-P' = Positive logic remote control

Notes,

- 1\ 20Mhz bandwidth. External 10uF tantalum capacitor placed across +Vout and -Vout; 33 uF e-cap or equivalent placed across +Vin and -Vin.
- 2\ Efficiency measurements taken at full load and nominal line and Tamb = 25degC
- 3\ All specifications taken at nominal line, full load and Tamb = 25degC unless otherwise noted
- 4\ Mechanical dimensions are for reference only. Dimensions are in MM. Mechanical tolerance = +/- 0.5mm
- 5\ Technical reference notes should be consulted for detailed information when available.
- 6\ All specifications subject to change without notice
- 7\ Warranty 2 years
- 8\ The through-hole terminated modules are intended for wave-soldering process – special request for other manufacturing processes to be made to Emerson

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru