


☐ EYE OF NEEDLE BABY-H
 PRESS FIT SECTION PRESS FIT SECTION




SEE DETAIL

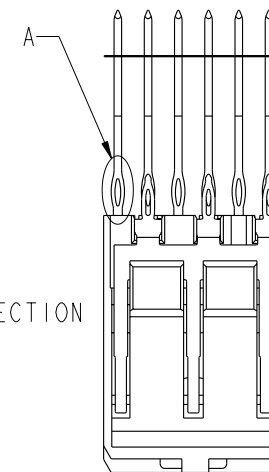

BABY - H

DETAIL A
SCALE 4:1
SEE NOTE 16

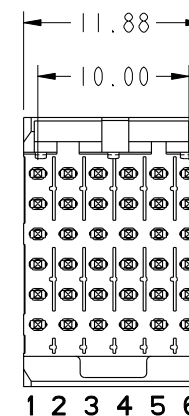
Pro/E

STATUS: **Released** Printed: May 13, 2011




PRODUCT NUMBER
SEE SHEET 1


PRESS-FIT HOLES	OPTION 1
HOLE DIAMETER AFTER PLATING	0.65-0.80
DRILLED HOLE	0.81-0.86 (0.85 DRILL)
COPPER PLATING	0.025 MIN
SnPb PLATING	0.005-0.015

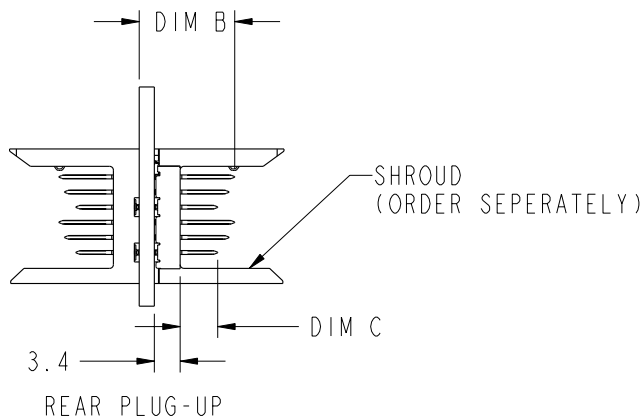

SEE PRINT 58351 FOR ADDITIONAL
PCB INFORMATION

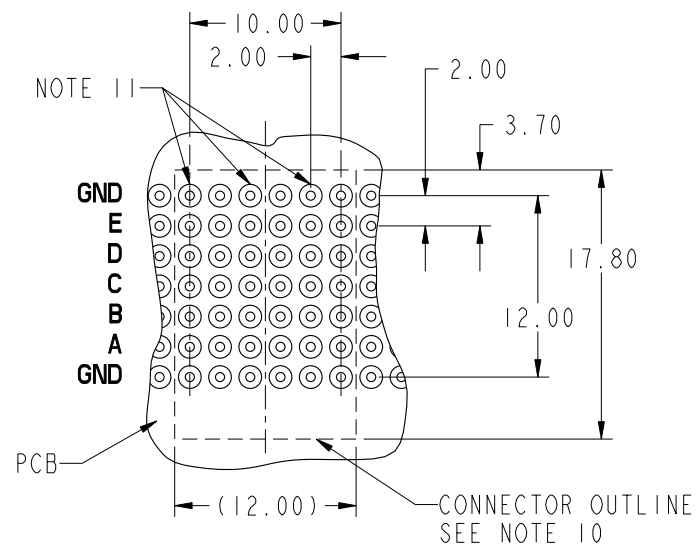

RECOMMENDED PCB HOLE PATTERN
(COMPONENT SIDE)



mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecr no.	dr	date	linear	0.X ± 0.3	projection	COPY	title	VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.
AW					0.XX ± 0.13				
					.XXX ± .051				
				angles	0° ± 2°	MM 2:1	scale	product family METRAL 1000	code 213
				dr	K. BELL 2000-03-29				
				enrg	M. HAHN 2000-03-29				
				chr	M. HAHN 2000-03-29	A	size dwg no 74817	sheet 2	
				appd	M. HAHN 2000-03-29				
sheet index	revision sheet							cage code 22526	4

Pro/E

PDM: Rev:AW

STATUS: Released Printed: May 13, 2011



PIN CODE NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN'S TAIL LENGTH				
			WHEN MATING TO A 73981 OR 84688 SERIES METRAL 1000 RECEPTACLE		WHEN MATING TO A 52057 SERIES METRAL 4000 RECEPTACLE		
			ROWS A,B,C,D,E	GROUND ROW	ROWS:A,B,D,E	ROW C	GROUND ROW
01*	5.00	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
22		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
30		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
05		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
35		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
48		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
40		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
65		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
09		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
02*	5.75	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
44		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
31		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
06		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
36		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
49		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
25		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
66		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
10		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
03*	6.50	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
45		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
32		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
07		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
37		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
50		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
41		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
24		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
11		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10

* STUB PINS - NO REAR PLUG-UP
 ** THE GREATEST RANGE OCCURS WHEN
 THE B DIMENSION OF PIN 'GND' IS ONE SIZE
 SHORTER THEN THE OTHER PINS.

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.3	projection	COPY	title	VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.
AW					0.XX ±0.13				
					.XXX ±.051				
				angles	0° ±2°		MM	product family	METRAL 1000
				dr	K. BELL 2000-03-29				
				engr	M. HAHN 2000-03-29				
					chr	M. HAHN 2000-03-29	scale	A	size
					appd	M. HAHN 2000-03-29			
sheet	revision								
index	sheet								

cage code 22526

Pro/E

PDM: Rev:AW

STATUS: Released Printed: May 13, 2011



PIN CODE NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN LENGTH				
			WHEN MATING TO A 73981 OR 84688 SERIES RECEPTACLE		WHEN MATING TO A 52057 SERIES METRAL 4000 RECEPTACLE		
			ROWS A,B,C,D,E	GROUND ROW	ROWS:A,B,D,E	ROW C	GROUND ROW
04*	7.25	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
46		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
33		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
08		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
38		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
51		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
42		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
67		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
12		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
19*	8.00	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
47		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
34		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
20		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
39		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
52		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
43		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
68		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
21		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10

* STUB PINS - NO REAR PLUG-UP
** THE GREATEST RANGE OCCURS WHEN
THE B DIMENSION OF PIN 'GND' IS ONE SIZE
SHORTER THEN THE OTHER PINS.

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		www.fciconnect.com					
ltr	ecn no.	dr	date	linear	0.X ±0.3	projection		title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.					
AW					0.XX ±0.13								
					.XXX ±.051								
				angles	0° ±2°	 MM scale 1:1		product family	METRAL 1000	code	213		
				dr	K. BELL			2000-03-29	size	dwg no	74817	sheet	4
				enrg	M. HAHN			2000-03-29					
				chr	M. HAHN			2000-03-29					
				appd	M. HAHN	2000-03-29							
sheet	revision												
index	sheet												

cage code 22526

Pro/E

PDM: Rev:AW

STATUS: Released Printed: May 13, 2011



METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X001 ** SEE NOTE 15 LEAD FREE OPTION	E	04	03	03	01	01	01
	D	04	03	03	01	01	01
	C	04	03	03	01	01	01
	B	04	03	03	01	01	01
	A	04	03	03	01	01	01
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X002 ** SEE NOTE 15 LEAD FREE OPTION	E	01	01	01	01	03	04
	D	01	01	01	01	03	04
	C	01	01	01	01	03	04
	B	01	01	01	01	03	04
	A	01	01	01	01	03	04
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X003 ** SEE NOTE 15 LEAD FREE OPTION	E	02	03	02	02	04	19
	D	02	03	02	02	04	19
	C	02	03	02	02	04	19
	B	02	03	02	02	04	19
	A	02	03	02	02	04	19
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X004 ** SEE NOTE 15 LEAD FREE OPTION	E	03	02	02	04	19	02
	D	03	02	02	04	19	02
	C	03	02	02	04	19	02
	B	03	02	02	04	19	02
	A	03	02	02	04	19	02
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X005 *RPU SEE NOTE 15 LEAD FREE OPTION	E	06	06	06	06	06	06
	D	06	06	06	06	06	06
	C	30	06	06	06	06	06
	B	06	06	06	06	06	06
	A	06	06	06	06	06	06
	GND	30	30	30	30	30	30

PCB THICKNESS
RANGE FOR REAR
PLUG UP
APPLICATIONS:
3.25 - 4.55

- * REAR PLUG-UP PART NUMBER WITH PIN ALIGNER
- ** CANNOT BE MATED TO A METRAL 4000
RECEPTACLE
- *** REAR PLUG-UP PART NUMBER WITHOUT PIN ALIGNER

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X006 ** SEE NOTE 15 LEAD FREE OPTION	E	19	03	03	03	02	01
	D	19	03	03	03	02	01
	C	19	03	03	03	02	01
	B	19	03	03	03	02	01
	A	19	03	03	03	02	01
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X007 *RPU ** SEE NOTE 15 LEAD FREE OPTION	E	20	07	07	07	06	05
	D	20	07	07	07	06	05
	C	20	07	07	07	06	05
	B	20	07	07	07	06	05
	A	20	07	07	07	06	05
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X008 ** SEE NOTE 15 LEAD FREE OPTION	E	19	03	03	03	03	03
	D	19	03	03	03	03	03
	C	19	03	03	03	03	03
	B	19	03	03	03	03	03
	A	19	03	03	03	03	03
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X009 *RPU ** SEE NOTE 15 LEAD FREE OPTION	E	20	07	07	07	07	07
	D	20	07	07	07	07	07
	C	20	07	07	07	07	07
	B	20	07	07	07	07	07
	A	20	07	07	07	07	07
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X010 SEE NOTE 15 LEAD FREE OPTION	E	03	03	03	03	03	03
	D	02	03	03	03	03	03
	C	03	03	03	03	03	03
	B	03	03	03	03	03	03
	A	03	03	03	03	03	03
	GND	01	01	01	01	01	01

PCB THICKNESS
RANGE FOR REAR
PLUG UP
APPLICATIONS:
2.30 (2.95) - 5.30
(NOT A STANDARD
METRAL 1000 APPL.).
CANNOT BE MATED
TO A METRAL 4000
RECEPTACLE

PCB THICKNESS
RANGE FOR REAR
PLUG UP
APPLICATIONS:
2.30 (2.95) - 5.30
(NOT A STANDARD
METRAL 1000 REAR
PLUG UP APPL.).
CANNOT BE MATED
TO A METRAL 4000.

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X011 *RPU SEE NOTE 15 LEAD FREE OPTION	E	05	05	05	05	05	05
	D	05	05	05	05	05	05
	C	05	05	05	05	05	05
	B	05	05	05	05	05	05
	A	05	05	05	05	05	05
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X012 *RPU SEE NOTE 15 LEAD FREE OPTION	E	02	02	06	06	06	06
	D	02	02	06	06	06	06
	C	02	02	06	06	06	06
	B	02	02	06	06	06	06
	A	02	02	06	06	06	06
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X013 *RPU SEE NOTE 15 LEAD FREE OPTION	E	06	06	06	06	02	02
	D	06	06	06	06	02	02
	C	06	06	06	06	02	02
	B	06	06	06	06	02	02
	A	06	06	06	06	02	02
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X014 *RPU SEE NOTE 15 LEAD FREE OPTION	E	10	10	10	10	10	10
	D	10	10	10	10	10	10
	C	10	10	10	10	10	10
	B	10	10	10	10	10	10
	A	10	10	10	10	10	10
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X015 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	04	04	04	04	04	04
	B	02	02	02	02	02	02
	A	02	02	02	02	02	02
	GND	02	02	02	02	02	02

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
2.30 (2.95) - 5.30
FOR METAL 1000
RECEPTACLE (NOT
A STANDARD METRAL
1000 APPL.) AND
2.30 (3.30) - 5.30 FOR
METRAL 4000 APPL.

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
2.30 (2.95) - 5.30
FOR METAL 1000
RECEPTACLE (NOT
A STANDARD METRAL
1000 APPL.) AND
2.30 (3.30) - 5.30 FOR
METRAL 4000 APPL.

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
2.30 (2.95) - 5.30
FOR METAL 1000
RECEPTACLE (NOT
A STANDARD METRAL
1000 APPL.) AND
2.30 (3.30) - 5.30 FOR
METRAL 4000 APPL.

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
5.70 - 8.70 FOR METAL
1000 APPL. (NOT A
STANDARD METRAL
1000 APPL.) AND
6.70 - 8.70 FOR A
METRAL 4000
APPLICATION.

mat'l code SEE NOTE 5				tolerances unless otherwise specified				CUSTOMER		FCi www.fciconnect.com	
ltr	ecr no.	dr	date	linear	0.X ±0.3			projection	COPY		
AW					0.XX ±0.13				title		
					.XXX ±.051				VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.		
				angles	0° ±2°			MM scale 2:1	product family METRAL 1000		
				dr	K. BELL	2000-03-29	code				
				enrg	M. HAHN	2000-03-29	213				
				chr	M. HAHN	2000-03-29	size			dwg no	
				appd	M. HAHN	2000-03-29	A			74817	
sheet index		revision sheet								sheet 5	



METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X016 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	04	04	04	04	04	04
	B	01	02	02	02	02	01
	A	02	02	02	02	02	02
	GND	02	02	02	02	02	02

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X017 SEE NOTE 15 LEAD FREE OPTION	E	01	01	01	01	01	01
	D	01	01	01	01	01	01
	C	03	03	03	03	03	03
	B	01	01	01	01	01	01
	A	01	01	01	01	01	01
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X018 SEE NOTE 15 LEAD FREE OPTION	E	03	02	02	01	01	01
	D	03	02	02	01	01	01
	C	03	02	02	03	03	03
	B	03	02	02	01	01	01
	A	03	02	02	01	01	01
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X019 SEE NOTE 15 LEAD FREE OPTION	E	01	01	01	02	02	03
	D	01	01	01	02	02	03
	C	03	03	03	02	02	03
	B	01	01	01	02	02	03
	A	01	01	01	02	02	03
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X023 ** SEE NOTE 15 LEAD FREE OPTION	E	01	03	03	03	01	01
	D	01	03	03	03	01	19
	C	01	01	01	01	01	19
	B	01	01	01	01	01	19
	A	01	01	01	19	19	19
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X024 *RPU SEE NOTE 15 LEAD FREE OPTION	E	05	05	05	05	05	05
	D	05	05	05	05	05	05
	C	05	05	05	05	05	05
	B	05	05	05	05	05	05
	A	05	05	05	05	05	05
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X025 ** SEE NOTE 15 LEAD FREE OPTION	E	01	19	01	01	01	01
	D	01	19	01	01	01	01
	C	01	19	01	01	01	01
	B	01	19	01	01	01	01
	A	01	19	01	01	01	01
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X026 *RPU SEE NOTE 15 LEAD FREE OPTION	E	02	02	49	49	49	49
	D	02	02	49	49	49	49
	C	02	02	49	49	49	49
	B	02	02	49	49	49	49
	A	02	02	49	49	49	49
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X027 *RPU SEE NOTE 15 LEAD FREE OPTION	E	49	49	49	49	02	02
	D	49	49	49	49	02	02
	C	49	49	49	49	02	02
	B	49	49	49	49	02	02
	A	49	49	49	49	02	02
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X028 *RPU SEE NOTE 15 LEAD FREE OPTION	E	49	49	49	49	49	49
	D	49	49	49	49	49	49
	C	49	49	49	49	49	49
	B	49	49	49	49	49	49
	A	49	49	49	49	49	49
	GND	01	01	01	01	01	01

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
2.30 (2.95) - 5.30 FOR
METRAL 1000 APPL.
(NOT A STANDARD
METRAL 1000 APPL.)
AND 2.30 (3.30) -
5.30 FOR METRAL
4000 RECEPTACLE
APPLICATION

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
3.80 - 6.80 FOR
METRAL 1000
RECEPTACLE APPL.
(NOT A STANDARD
METRAL 1000 APPL.)
AND 2.30 (4.80) -
6.80 FOR METRAL
4000 APPLICATIONS

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
3.80 - 6.80 FOR
METRAL 1000
RECEPTACLE APPL.
(NOT A STANDARD
METRAL 1000 APPL.)
AND 2.30 (4.80) -
6.80 FOR METRAL
4000 APPLICATIONS

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
3.80 - 6.80 FOR
METRAL 1000
APPLICATIONS,
AND 4.80 - 6.80
FOR METRAL 4000
APPLICATIONS

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X029 SEE NOTE 15 LEAD FREE OPTION	E	01	01	01	01	01	01
	D	01	01	01	01	01	02
	C	01	01	01	01	01	01
	B	01	01	01	01	01	01
	A	01	01	03	01	01	03
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X030 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	19	19	19	19	19	19
	B	02	02	02	02	02	02
	A	03	02	03	02	02	01
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X031 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	19	19	19	19	19	19
	B	02	02	02	02	02	02
	A	01	03	02	03	02	02
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X032 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	19	19	19	19	19	19
	B	02	02	02	02	02	02
	A	02	02	02	02	02	01
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X033 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	19	19	19	19	19	19
	B	02	02	02	02	02	02
	A	01	02	02	02	02	03
	GND	01	01	01	01	01	01

- * REAR PLUG-UP PART NUMBER WITH PIN ALIGNER
- ** CANNOT BE MATED TO A METRAL 4000 RECEPTACLE
- *** REAR PLUG-UP PART NUMBER WITHOUT PIN ALIGNER

mat'l code SEE NOTE 5				tolerances unless otherwise specified				CUSTOMER		FCJ www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.3			projection			
AW					0.XX ±0.13						
					.XXX ±.051						
				angles	0° ±2°				title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.		
				dr	K. BELL	2000-03-29					
				enrg	M. HAHN	2000-03-29					
				chr	M. HAHN	2000-03-29					
				appd	M. HAHN	2000-03-29	scale 2:1		product family METRAL 1000 size A 74817 code 213 sheet 6		
sheet index	revision sheet										



A

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X034 *RPU ** SEE NOTE 15 LEAD FREE OPTION	E	05	20	05	05	05	05
	D	05	20	05	05	05	05
	C	05	20	05	05	05	05
	B	05	20	05	05	05	05
	A	05	20	05	05	05	05
GND	01	01	01	01	01	01	01

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
2.30 (2.95) - 5.30
(NOT A STANDARD
METRAL 1000
APPLICATION).
CANNOT BE MATED
TO A METRAL 4000
RECEPTACLE.

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X035 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	03	03	03	03	03	03
	B	01	02	02	02	02	02
	A	01	02	02	02	02	02
GND	01	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X036 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	01	01	01	01	03	02
	B	01	01	02	02	02	02
	A	02	02	02	02	02	02
GND	01	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X037 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	01	02	02	02	02	02
	B	01	01	01	01	01	01
	A	02	02	02	02	02	02
GND	01	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X038 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	02	02	02	02	02	02
	B	02	02	02	02	02	02
	A	02	02	02	03	02	02
GND	-	-	-	-	-	-	-

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X039 ** SEE NOTE 15 LEAD FREE OPTION	E	01	01	01	01	01	01
	D	01	01	01	01	01	01
	C	01	01	01	01	01	01
	B	01	01	01	01	01	01
	A	01	04	01	01	01	01
GND	01	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X040 *RPU ** SEE NOTE 15 LEAD FREE OPTION	E	08	06	06	06	06	06
	D	08	06	06	06	06	06
	C	06	06	06	06	06	06
	B	08	06	06	06	06	06
	A	08	06	06	06	06	06
GND	06	06	06	06	06	06	06

PCB THICKNESS
RANGE FOR REAR
PLUG UP
APPLICATIONS:
4.00 - 5.30.
CANNOT BE MATED
TO A METRAL 4000
RECEPTACLE.

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X041 ** SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	04	02
	D	02	02	02	02	02	02
	C	02	02	02	02	02	04
	B	02	02	02	02	02	02
	A	02	02	02	02	02	04
GND	01	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X042 *RPU ** SEE NOTE 15 LEAD FREE OPTION	E	08	06	06	06	06	06
	D	08	06	06	06	06	06
	C	08	06	06	06	06	06
	B	08	06	06	06	06	06
	A	08	06	06	06	06	06
GND	30	30	30	30	30	30	30

PCB THICKNESS
RANGE FOR REAR
PLUG UP
APPLICATIONS:
3.25 - 4.95 FOR
METRAL 1000
APPLICATIONS.
CANNOT BE MATED
TO A METRAL 4000
RECEPTACLE.

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X043 ** SEE NOTE 15 LEAD FREE OPTION	E	03	03	03	03	03	03
	D	03	03	03	03	01	03
	C	03	03	03	03	03	03
	B	03	03	03	03	03	03
	A	19	19	19	19	19	19
GND	01	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X044 *RPU ** SEE NOTE 15 LEAD FREE OPTION	E	45	45	45	45	45	45
	D	45	45	45	45	22	45
	C	45	45	45	45	45	45
	B	45	45	45	45	45	45
	A	47	47	47	47	47	47
GND	22	22	22	22	22	22	22

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
2.95 - 3.80 FOR
MATING TO
METRAL 1000
RECEPTACLE.
CANNOT BE MATED
TO METRAL 4000
RECEPTACLES.

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X045 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	02	02	02	02	02	2
	B	02	02	02	02	02	02
	A	02	01	02	02	02	02
GND	01	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X046 *RPU SEE NOTE 15 LEAD FREE OPTION	E	22	22	22	22	22	22
	D	22	22	22	22	22	22
	C	45	45	45	45	45	45
	B	22	22	22	22	22	22
	A	22	22	22	22	22	22
GND	01	22	22	22	22	01	01

PCB THICKNESS
RANGE FOR REAR
PLUG UP APPL.:
2.95 - 3.80 FOR
BOTH METRAL
1000 AND 4000
RECEPTACLE
MATING (NOT A
STANDARD METRAL
1000 APPLICATION)

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X047 SEE NOTE 15 LEAD FREE OPTION	E	02	01	02	02	02	02
	D	02	02	02	02	02	02
	C	02	02	02	02	02	02
	B	02	02	02	02	02	02
	A	02	02	02	02	02	02
GND	01	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X048 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	02	02	02	02	02	04
	B	02	02	02	02	02	02
	A	02	02	02	02	02	02
GND	02	02	02	02	02	02	02

A

- * REAR PLUG-UP PART NUMBER WITH
PIN ALIGNER
- ** CANNOT BE MATED TO A METRAL 4000
RECEPTACLE
- *** REAR PLUG-UP PART NUMBER WITHOUT
PIN ALIGNER

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCJ www.fciconnect.com	
ltr	ecr no.	dr	date	linear	0.X ±0.3	COPY		title	
AW				linear	0.XX ±0.13	projection		VERTICAL SIGNAL HDR 5 ROW	
				angles	.XXX ±.051	MM		P.F. 30 POS. SELECT LOAD STD.	
				dr	0° ±2°	MM		product family METRAL 1000	
				enrg	K. BELL 2000-03-29	scale		code	
				chr	M. HAHN 2000-03-29	2:1		213	
				appd	M. HAHN 2000-03-29	A		sheet	
								7	
sheet	revision								
index	sheet								

B



METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X049 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	04	02	02	02	02	02
	B	02	02	02	02	02	02
	A	02	02	02	02	02	02
	GND	02	02	02	02	02	02

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X050 ** SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	04
	D	02	02	02	02	02	04
	C	02	02	02	02	02	04
	B	02	02	02	02	02	04
	A	02	01	02	02	02	04
	GND	02	02	02	02	02	02

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X051 ** SEE NOTE 15 LEAD FREE OPTION	E	04	02	02	02	02	02
	D	04	02	02	02	02	02
	C	04	02	02	02	02	02
	B	04	02	02	02	02	02
	A	04	01	02	02	02	02
	GND	02	02	02	02	02	02

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X052 ***RPU SEE NOTE 15 LEAD FREE OPTION	E	05	05	05	05	05	05
	D	05	05	05	05	05	05
	C	05	05	05	05	05	05
	B	05	05	05	05	05	05
	A	05	05	05	05	05	05
	GND	01	01	01	01	01	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X053 ***RPU SEE NOTE 15 LEAD FREE OPTION	E	05	20	05	05	05	05
	D	05	20	05	05	05	05
	C	05	20	05	05	05	05
	B	05	20	05	05	05	05
	A	05	20	05	05	05	05
	GND	01	01	01	01	01	01



- * REAR PLUG-UP PART NUMBER WITH
PIN ALIGNER
- ** CANNOT BE MATED TO A METRAL 4000
RECEPTACLE
- *** REAR PLUG-UP PART NUMBER WITHOUT
PIN ALIGNER

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X054 ***RPU SEE NOTE 15 LEAD FREE OPTION	E	22	22	22	22	22	22
	D	22	22	22	22	22	22
	C	45	45	45	45	45	45
	B	22	22	22	22	22	22
	A	22	22	22	22	22	22
	GND	01	22	22	22	22	01

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X055 ** SEE NOTE 15 LEAD FREE OPTION	E	04	02	02	02	02	02
	D	04	02	02	02	02	02
	C	04	02	02	02	02	02
	B	04	02	02	02	02	02
	A	04	02	02	02	02	02
	GND	-	02	02	02	02	-

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X056 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	04	02	02	02	02	02
	B	02	02	02	02	02	02
	A	02	02	02	02	02	02
	GND	-	02	02	02	02	-

METRAL P/N	ROW	CONTACT CODE					
		1	2	3	4	5	6
74817-X057 *RPU SEE NOTE 15 LEAD FREE OPTION	E	22	22	22	01	01	01
	D	22	22	22	01	01	01
	C	22	22	22	01	01	01
	B	22	22	22	01	01	01
	A	22	22	22	01	01	01
	GND	22	22	22	22	22	22

mat'l code SEE NOTE 5				tolerances unless otherwise specified				CUSTOMER		 www.fciconnect.com			
ltr	ecr no.	dr	date	linear	0. X ± 0.3				projection 	title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.			
AW					0. XX ± 0.13								
					. XXX ± .051								
				angles	0° ± 2°				MM  scale 2:1	product family		METRAL 1000	code
				dr	K. BELL	2000-03-29				size	dwg no	213	
				enrg	J. VOLSTORF	2001-05-23						sheet	
				chr	M. HAHN	2000-03-29						8	
				appd	M. HAHN	2000-03-29							
sheet index		revision sheet											

Pro/E

cage code 22526

PDM: Rev:AW

STATUS: Released Printed: May 13, 2011



PRODUCT NUMBER
SEE SHEET 1

NOTES:

- SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
- SEE FCI PUBLICATION 950511-028 FOR "ELECTRICAL PERFORMANCE DATA FOR DIFFERENTIAL APPLICATIONS."
- SEE FCI PUBLICATION 950511-029 FOR "ELECTRICAL PERFORMANCE DATA FOR SINGLE-ENDED APPLICATION."
- UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994
- HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0.
PIN MATERIAL: PHOSPHOR BRONZE
GROUND SPRING MATERIAL: PHOSPHOR BRONZE
- PLATING INFORMATION: PLATING ON CONTACT AREA MEETS THE PERFORMANCE LEVELS SHOWN IN TABLE ON SHEET 1. PLATING OF "LF" TAILS IS Sn. PLATING ON ALL OTHER TAILS IS SnPb.
- DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.
FOR MATING WITH METRAL 1000 RECEPTACLES
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROWS A-E
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROW GND NEXT TO ROW A
DIM C : 5.00mm MIN, 8.00mm MAX FOR ROWS A-E
DIM C : 4.60mm MIN, 6.30mm MAX FOR ROW GND NEXT TO ROW A
FOR MATING WITH METRAL 4000 RECEPTACLES
DIM A : 5.00mm MIN, 6.50mm MAX FOR ROWS A, B, D & E
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROW C
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROW GND NEXT TO ROW A
DIM C : 5.00mm MIN, 7.00mm MAX FOR ROWS A, B, D & E
DIM C : 5.00mm MIN, 8.00mm MAX FOR ROW C
DIM C : 4.60mm MIN, 6.30mm MAX FOR ROW GND NEXT TO ROW A

- THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 2.9mm SINCE THE COMPLAINT SECTIONS OF THE GROUND SPRING OF THE HEADER DIRECTLY OPPOSE THE GROUND SPRING OF THE SHROUD. THE MIN PCB THICKNESS FOR FRONT PLUG-UP ONLY APPLICATIONS IS 1.6mm.
- THESE HOLES ARE NEEDED FOR REAR PLUG-UP DESIGNS USING A SHROUD AND MAY BE OMITTED FOR FRONT PLUG-UP ONLY DESIGNS.
- THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.
- CURRENT RATING: 1 AMP PER PIN
- TEMPERATURE RANGE: -55°C TO +105°C
- P/N 74817-XZZLF
- LEAD FREE (OPTIONAL)
SELECT LOAD PATTERN
PLATING CODE
- THE PRODUCTS WHERE THE PART NUMBERS ENDS IN LF MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- FOR LEAD FREE PART NUMBERS ADD 'LF' SUFFIX.
EXAMPLE: 74817-XXXXLF
- PIN TYPE IS AT THE MANUFACTURERS OPTION AND CAN BE EITHER BABY-H OR EYE OF THE NEEDLE STYLE



mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com			
ltr	ecr no.	dr	date		0.X ±0.3	COPY					
AW				linear	0.XX ±0.13	projection		title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.			
					.XXX ±.051						
				angles	0° ±2°						
				dr	K. BELL 2000-03-29	MM		product family METRAL 1000 code			
				enrg	M. HAHN 2000-03-29			size dwg no			
				chr	M. HAHN 2000-03-29	scale		A 74817			
				appd	M. HAHN 2000-03-29	1:1		sheet 213 9			
sheet index	revision sheet										

Pro/E

3

cage code 22526

4

PDM: Rev:AW

STATUS: Released

Printed: May 13, 2011

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru