

LTPD/CAPD Series 24 V **Printer** Mechanisms



In today's market product designers are asked to deliver smaller devices with more robust functionality, greater longevity, and enhanced reliability. To succeed products must be priced competitively and time to market is key. Point-of-sale (POS) systems, medical devices, and other products with embedded thermal printers are no exception. Each new generation must do more, cost less, and last longer.

New 24 V LTPD and CAPD series thermal printer mechanisms help engineers meet these challenges. These mechanisms are smaller and more robust, offering industry leading value, backed by critical advancements in design flexibility and reliability.

Small Form Factor

LTPD and CAPD series mechanisms free up critical design real estate. The new mechanisms offer a smaller overall form factor, innovative angled paper guide that requires less depth, and a smaller pitch flexible print circuit (FPC) cable.



Proven Reliability

LTPD and CAPD models are rated for a minimum of 100 km total printing and 100 million pulses for long life reliability. CAPD models offer a new built-in auto-cutter design, improving cutter reliability. The result: reliable media output, every time.

Design Flexibility

An array of form factor choices provides more flexibility for a smoother integration process. Options include, ASIC and interface board solutions, and both horizontal and vertical mechanical orientation designs.

- **2" and 3" print width models**
- **Choice of horizontal and vertical orientations**
- **EZ-OP clamshell paper replacement**
- **Platen latch for better shock absorption**
- **Available built-in auto-cutter (CAPD models)**

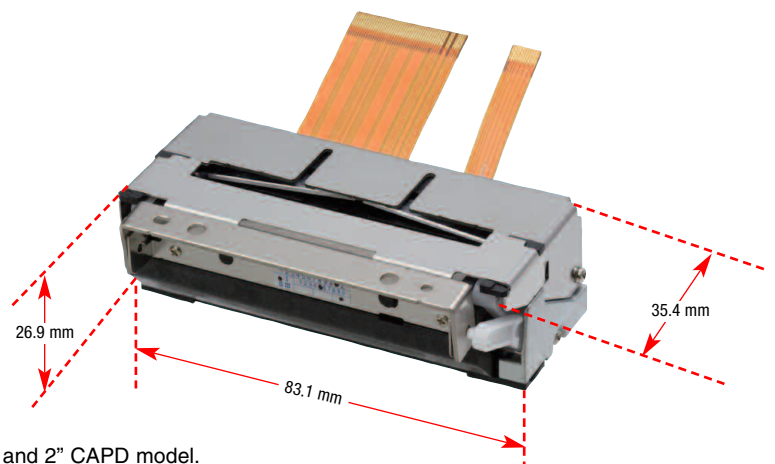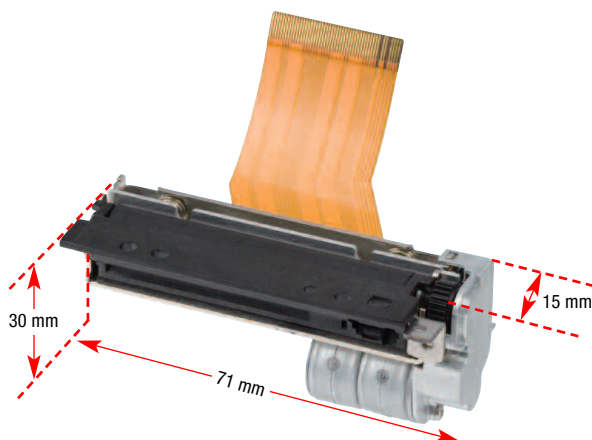

2" vertical LTPD model and 2" CAPD model.



Product Specifications

| Model | LTPD247 | LTPD347 | CAPD247 | CAPD347 |
|----------------------------|--|---------|---|---------|
| Printing | Method Thermal line dot printing | | | |
| | Number of dots/line 432 | | | |
| | Resolution(dots/mm) 8 | | | |
| | Paper width (mm) 58 ^{+0.1} | | | |
| | Printing width (mm) 54 | | | |
| | Speed (max mm/sec) 200 | | | |
| Sensors | Paper path Curved | | | |
| | Head temperature By thermistor | | | |
| | Platen position detection By mechanical switch | | | |
| | Out of paper detection By photo interrupter | | | |
| Power supply (V) | Cutter home position detection - | | | |
| | Cutter home position detection By photo interrupter | | | |
| Peak current (A) | Operating Voltage (Vdd) 2.7 to 3.6 / 4.75 to 5.25 | | | |
| | Operating Voltage (Vp) 21.6 to 26.4 | | | |
| Service life | Head 2.61 (26.4 V/144 dots) | | 2.61 (26.4 V/144dots) | |
| | Motor 0.44 | | 0.4 | |
| | Cutter - | | 0.55 | |
| Operating temperature (°C) | Pulse activation (pulses) 100 million | | 100 million | |
| | Abrasion resistance (km)* 100 * | | 100 * | |
| Dimensions (WxDxHmm)* | Horizontal 71.0 x 30.0 x 15.0 ** | | 91.0 x 30.0 x 15.0 ** | |
| | Vertical 71.0 x 15.0 x 30.0 ** | | 91.0 x 15.0 x 30.0 ** | |
| Auto-cutter | Mass(g) Approx. 56 | | Approx. 64 | |
| | Method - | | Slide cutting | |
| Life span | Paper thickness (um) - | | 54 to 90 | |
| | Cutting type - | | 54 to 78 | |
| | Operating time (sec/cycle) - | | Full cut and partial cut (1.5±0.5mm tab left at the center) | |
| | Minimum paper cutting length (mm) - | | 0.5 | |
| | Cutting frequency (max cuts/min) - | | 10 | |
| Life span | Paper cutting (cuts) - | | 30 | |
| | | | 700,000 * | |

*Use recommended thermal paper. **Excluding convex section. ***Excluding Mounting Part. Specifications are subject to change without notice.

IF Board Specifications

| | IFD001-01UK-E | IFD001-01SK-E |
|-------------------------------|---|------------------|
| CPU | PTD00P01-E | |
| Corresponding Model | LTPD247, LTPD347 Series CAPD247, CAPD347 Series | |
| Operating Voltage (V) | Vp: 21.6 to 26.4 | |
| Character matrix (H x W dots) | 16 dot characters: 16 x 8, 16 x 16 24 dot characters: 24 x 12, 24 x 24 | |
| Character Type | Optional font | Yes |
| | Downloaded character | Yes |
| | User-defined character | Yes |
| | Extend graphics character set | Yes |
| | Katakana character set | Yes |
| | Codepage 1252 | Yes |
| Communication interface | USB(2.0) | Serial (RS-232C) |
| Dimensions (W x D x H mm) | 69.0 x 50.0 x 14.0 | |

ASIC Specifications:

| | PTD00P01-E |
|-------------------------------|---|
| Corresponding model | LTPD247, LTPD347 series CAPD247, CAPD347 series |
| Package form | 120 pin QFP |
| Operating voltage (V) | Vp: 21.6 to 26.4, Vcc: 3.0 to 3.6 |
| Operating frequency (MHz) | 12MHz±0.01% |
| Configuration | C-MOS LSI |
| Communication interface | Parallel, Serial, USB |
| Character type | Extended graphics character set Other characters available with CGs or external memory |
| Character matrix (H x W dots) | 16 dot characters: 16 x 8, 16 x 16 24 dot characters: 24 x 12, 24 x 24 |
| Dimensions (W x D x H mm) | 16.0 x 16.0 x 1.7 |

Optional Cables

| Accessory | Product |
|--------------|-------------|
| Power Cable | DC-04100A-E |
| Switch Cable | OC-D1430A-E |
| Serial Cable | OC-D0730A-E |
| USB Cable | IFC-U01-1-E |



Seiko Instruments USA Inc.
Thermal Printer Division
2990 Lomita Blvd., Torrance, CA 90505
Telephone (310) 517-7778
Facsimile (310) 517-8154
Email: printerinfo@siu-la.com
www.siiprinters.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru