

## MINIATURE PC BOARD RELAY

### FEATURES

- Subminiature size
- High sensitivity, 110 mW pickup
- Coils to 48 VDC
- Hermetically sealed version available
- Epoxy sealed for automatic wave soldering
- Contacts rated at 3, 6 or 10 Amps
- Withstands 6 kV IEEE Lightning Surge (special order)
- Class B insulation (130°C) standard
- Class F insulation (155°C) version available
- UL, CUR file E44211
- VDE approved versions available (Class A Insulation only)



### CONTACTS

|                    |                                                                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Arrangement</b> | SPDT (1 Form C)<br>SPST (1 Form A) 10 A version only                                                                                                                        |
| <b>Ratings</b>     | Resistive load:<br>Max. switched power: 100 W or 600 VA<br>Max. switched current: 3 A<br>Max. switched voltage: 150 VDC or 300 VAC<br><b>UL Rating:</b> See chart on Page 3 |
| <b>Light Duty</b>  |                                                                                                                                                                             |
| <b>Medium Duty</b> | Max. switched power: 180 W or 1800 VA<br>Max. switched current: 6 A<br>Max. switched voltage: 150 VDC or 300 VAC<br><b>UL Rating:</b> See chart on Page 3                   |
| <b>Heavy Duty</b>  | Max. switched power: 300 W or 2400 VA<br>Max. switched current: 10 A<br>Max. switched voltage: 150 VDC or 300 VAC<br><b>UL Rating:</b> See chart on Page 3                  |
| <b>Material</b>    | Light duty: Silver<br>Medium duty: Silver nickel<br>Heavy duty: Silver cadmium oxide                                                                                        |
| <b>Resistance</b>  | < 100 milliohms initially                                                                                                                                                   |

### COIL

|                                          |                                                                                                                                      |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power At Pickup Voltage (typical)</b> | Standard coil: 210 mW<br>Sensitive coil: 140 mW<br>Heavy duty: 228 mW<br>(110 mW available)                                          |
| <b>Max. Continuous Dissipation</b>       | Class B: 2.0 W 20°C (68°F) ambient<br>1.6 W 40°C (104°F) ambient<br>Class F: 2.5 W 20°C (68°F) ambient<br>2.1 W 40°C (104°F) ambient |
| <b>Temperature Rise</b>                  | At nominal coil voltage<br>Standard coil: 38°C (68°F)<br>Sensitive coil: 28°C (50°F)                                                 |
| <b>Temperature</b>                       | Max. 105°C (221°F) Class A<br>Max. 130°C (266°F) Class B<br>Max. 155°C (311°F) Class F                                               |

### GENERAL DATA

|                                                      |                                                                                                                |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Life Expectancy</b>                               | Minimum operations                                                                                             |
| <b>Mechanical</b>                                    | 100 million operations                                                                                         |
| <b>Electrical</b>                                    | 3 x 10 <sup>5</sup> at 3 A, 120 VAC                                                                            |
| <b>Light Duty</b>                                    | 1.8 x 10 <sup>5</sup> at 6 A, 120 VAC                                                                          |
| <b>Medium Duty</b>                                   | 1 x 10 <sup>5</sup> at 10 A, 120 VAC                                                                           |
| <b>Heavy Duty</b>                                    |                                                                                                                |
| <b>Operate Time (typical)</b>                        | 5 ms at nominal coil voltage                                                                                   |
| <b>Release Time (typical)</b>                        | 2 ms at nominal coil voltage<br>(with no coil suppression)                                                     |
| <b>Dielectric Strength (at sea level for 1 min.)</b> | 750 Vrms contact to contact<br>2500 Vrms contact to coil except hermetically sealed version which is 1600 Vrms |
| <b>Insulation Resistance</b>                         | 1000 megohms min. at 20°C, 500 VDC, 50% RH                                                                     |
| <b>Dropout</b>                                       | Greater than 5% of nominal coil voltage                                                                        |
| <b>Ambient Temperature Operating</b>                 | At nominal coil voltage<br>-55°C (-67°F) to 90°C (194°F) Class B<br>-55°C (-67°F) to 115°C (239°F) Class F     |
| <b>Storage</b>                                       | -55°C (-67°F) to 130°C (266°F) Class B<br>-55°C (-67°F) to 155°C (311°F) Class F                               |
| <b>Vibration</b>                                     | 0.062" DA at 10–55 Hz, 10 g at 55–110 Hz                                                                       |
| <b>Shock</b>                                         | 10 g                                                                                                           |
| <b>Enclosure</b>                                     | P.E.T. polyester                                                                                               |
| <b>Terminals</b>                                     | Tinned copper alloy, P.C.                                                                                      |
| <b>Max. Solder Temp.</b>                             | 270°C (518°F)                                                                                                  |
| <b>Max. Solder Time</b>                              | 5 seconds                                                                                                      |
| <b>Max. Solvent Temp.</b>                            | 80°C (176°F)                                                                                                   |
| <b>Max. Immersion Time</b>                           | 30 seconds                                                                                                     |
| <b>Weight</b>                                        | 8 grams                                                                                                        |

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Other coil resistances and sensitivities available upon request.
4. Unsealed relays should not be dip cleaned.
5. Specifications subject to change without notice.



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

11/14/06W

## RELAY ORDERING DATA

| COIL SPECIFICATIONS               |                     |                       |                  | ORDER NUMBER*               |              |                             |               |
|-----------------------------------|---------------------|-----------------------|------------------|-----------------------------|--------------|-----------------------------|---------------|
| STANDARD RELAYS: 1 Form C (SPDT)  |                     |                       |                  | LIGHT DUTY (3 Amp contact)  |              | MEDIUM DUTY (6 Amp contact) |               |
| Nominal Coil VDC                  | Max. VDC Continuous | Resistance $\pm 10\%$ | Must Operate VDC | Unsealed                    | Epoxy Sealed | Unsealed                    | Epoxy Sealed  |
| 5                                 | 10.6                | 56                    | 3.25             | AZ8-1C-5D                   | AZ8-1C-5DE   | AZ8-1CH-5D                  | AZ8-1CH-5DE   |
| 6                                 | 12.6                | 80                    | 3.90             | AZ8-1C-6D                   | AZ8-1C-6DE   | AZ8-1CH-6D                  | AZ8-1CH-6DE   |
| 9                                 | 19.0                | 180                   | 5.85             | AZ8-1C-9D                   | AZ8-1C-9DE   | AZ8-1CH-9D                  | AZ8-1CH-9DE   |
| 12                                | 25.0                | 320                   | 7.80             | AZ8-1C-12D                  | AZ8-1C-12DE  | AZ8-1CH-12D                 | AZ8-1CH-12DE  |
| 18                                | 37.8                | 720                   | 11.7             | AZ8-1C-18D                  | AZ8-1C-18DE  | AZ8-1CH-18D                 | AZ8-1CH-18DE  |
| 24                                | 50.0                | 1,280                 | 15.60            | AZ8-1C-24D                  | AZ8-1C-24DE  | AZ8-1CH-24D                 | AZ8-1CH-24DE  |
| 48                                | 87.0                | 3,800                 | 31.20            | AZ8-1C-48D                  | AZ8-1C-48DE  | AZ8-1CH-48D                 | AZ8-1CH-48DE  |
| SENSITIVE RELAYS: 1 Form C (SPDT) |                     |                       |                  | LIGHT DUTY (3 Amp contact)  |              | MEDIUM DUTY (6 Amp contact) |               |
| Nominal Coil VDC                  | Max. VDC Continuous | Resistance $\pm 10\%$ | Must Operate VDC | Unsealed                    | Epoxy Sealed | Unsealed                    | Epoxy Sealed  |
| 5                                 | 12.6                | 80                    | 3.25             | AZ8-1C-5DS                  | AZ8-1C-5DSE  | AZ8-1CH-5DS                 | AZ8-1CH-5DSE  |
| 6                                 | 14.8                | 110                   | 3.90             | AZ8-1C-6DS                  | AZ8-1C-6DSE  | AZ8-1CH-6DS                 | AZ8-1CH-6DSE  |
| 9                                 | 22.4                | 250                   | 5.85             | AZ8-1C-9DS                  | AZ8-1C-9DSE  | AZ8-1CH-9DS                 | AZ8-1CH-9DSE  |
| 12                                | 30.0                | 440                   | 7.80             | AZ8-1C-12DS                 | AZ8-1C-12DSE | AZ8-1CH-12DS                | AZ8-1CH-12DSE |
| 24                                | 60.0                | 1,780                 | 15.60            | AZ8-1C-24DS                 | AZ8-1C-24DSE | AZ8-1CH-24DS                | AZ8-1CH-24DSE |
| 48                                | 120.0               | 7,120                 | 31.20            | AZ8-1C-48DS                 | AZ8-1C-48DSE | AZ8-1CH-48DS                | AZ8-1CH-48DSE |
| STANDARD RELAYS: 1 Form C (SPDT)  |                     |                       |                  | HEAVY DUTY (10 Amp contact) |              |                             |               |
| Nominal Coil VDC                  | Max. VDC Continuous | Resistance $\pm 10\%$ | Must Operate VDC | Unsealed                    |              | Epoxy Sealed                |               |
| 5                                 | 10.6                | 56                    | 4.0              | AZ8-1CT-5D                  |              | AZ8-1CT-5DE                 |               |
| 6                                 | 12.6                | 80                    | 4.8              | AZ8-1CT-6D                  |              | AZ8-1CT-6DE                 |               |
| 9                                 | 19.0                | 180                   | 7.2              | AZ8-1CT-9D                  |              | AZ8-1CT-9DE                 |               |
| 12                                | 25.0                | 320                   | 9.6              | AZ8-1CT-12D                 |              | AZ8-1CT-12DE                |               |
| 24                                | 50.0                | 1,280                 | 19.2             | AZ8-1CT-24D                 |              | AZ8-1CT-24DE                |               |
| 48                                | 87.0                | 3,800                 | 38.4             | AZ8-1CT-48D                 |              | AZ8-1CT-48DE                |               |

\*To indicate Class F version, add suffix "F". Other coil resistances and sensitivities available. Please contact the factory. Substitute "1AT" in place of "1CT" to indicate 1 Form A. For Hermetically sealed version, substitute "H" for "E".

## RELAY ORDERING DATA - VDE APPROVED VERSIONS

| COIL SPECIFICATIONS                     |                     |                       |                  | ORDER NUMBER   |                    |
|-----------------------------------------|---------------------|-----------------------|------------------|----------------|--------------------|
| STANDARD RELAYS: 1 Form C (SPDT) – VDE  |                     |                       |                  | MEDIUM DUTY    |                    |
| Nominal Coil VDC                        | Max. VDC Continuous | Resistance $\pm 10\%$ | Must Operate VDC | Unsealed 6 Amp | Epoxy Sealed 5 Amp |
| 5                                       | 10.6                | 56                    | 3.25             | AZ8-1CH-5DA    | AZ8-1CH-5DEA       |
| 6                                       | 12.6                | 80                    | 3.90             | AZ8-1CH-6DA    | AZ8-1CH-6DEA       |
| 9                                       | 19.0                | 180                   | 5.85             | AZ8-1CH-9DA    | AZ8-1CH-9DEA       |
| 12                                      | 25.0                | 320                   | 7.80             | AZ8-1CH-12DA   | AZ8-1CH-12DEA      |
| 24                                      | 50.0                | 1,280                 | 15.60            | AZ8-1CH-24DA   | AZ8-1CH-24DEA      |
| 48                                      | 87.0                | 3,800                 | 31.20            | AZ8-1CH-48DA   | AZ8-1CH-48DEA      |
| SENSITIVE RELAYS: 1 Form C (SPDT) – VDE |                     |                       |                  | MEDIUM DUTY    |                    |
| Nominal Coil VDC                        | Max. VDC Continuous | Resistance $\pm 10\%$ | Must Operate VDC | Unsealed 6 Amp | Epoxy Sealed 5 Amp |
| 5                                       | 12.6                | 80                    | 3.25             | AZ8-1CH-5DSA   | AZ8-1CH-5DSEA      |
| 6                                       | 14.8                | 110                   | 3.90             | AZ8-1CH-6DSA   | AZ8-1CH-6DSEA      |
| 9                                       | 22.4                | 250                   | 5.85             | AZ8-1CH-9DSA   | AZ8-1CH-9DSEA      |
| 12                                      | 30.0                | 440                   | 7.80             | AZ8-1CH-12DSA  | AZ8-1CH-12DSEA     |
| 24                                      | 60.0                | 1,780                 | 15.60            | AZ8-1CH-24DSA  | AZ8-1CH-24DSEA     |
| 48                                      | 120.0               | 7,120                 | 31.20            | AZ8-1CH-48DSA  | AZ8-1CH-48DSEA     |



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

11/14/06W


## UL, CUR RATINGS

|                    |                                                                                                                                                                                                                                                 |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Light Duty</b>  | 2 A at 28 VDC or 300 VAC<br>1/8 HP at 120 VAC<br>1/10 HP at 120/240 VAC (100,000 cyc)<br>1.2/0.6 A at 120/240 VAC, Pilot Duty 100,000 cyc<br>3.0/1.5 A at 120/240 VAC General Use 100,000 cyc                                                   |
| <b>Medium Duty</b> | 6 A at 28 VDC or 300 VAC<br>1/8 HP at 120/240 VAC (100,000 cyc)<br>1.5/0.8 A at 120/240 VAC, Pilot Duty 100,000 cyc<br>3.8/1.9 A at 120/240 VAC General Use 100,000 cyc                                                                         |
| <b>Heavy Duty</b>  | SPST:<br>10 A at 24 VDC / 125 VAC Resistive<br>1/4 HP at 120 / 125 VAC<br>1/2 HP at 250 VAC<br>7 A at 277 VAC Resistive<br><br>SPDT:<br>10 A at 250 VAC General Use<br>7 A at 277 VAC Resistive<br>6 A at 24 VDC Resistive<br>1/4 HP at 125 VAC |

## VDE RATINGS


|                 |                                         |
|-----------------|-----------------------------------------|
| <b>Sealed</b>   | 5 A at 250 VAC resistive, 10,000 cycles |
| <b>Unsealed</b> | 6 A at 250 VAC resistive, 50,000 cycles |

## MECHANICAL DATA

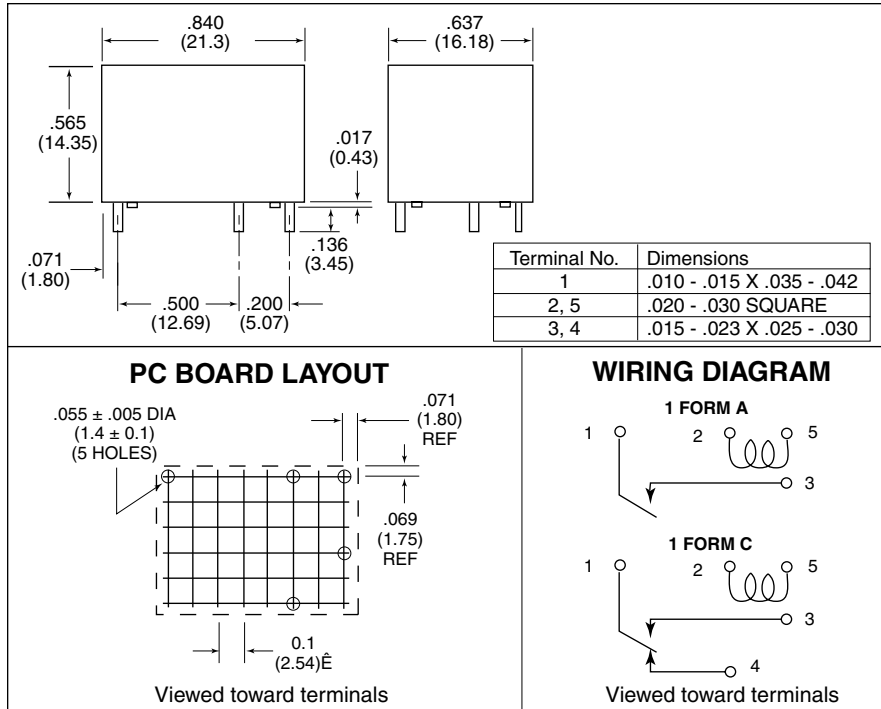


Dimensions in inches with metric equivalents in parentheses. Tolerance: ± .010"

## Coil Temperature Rise

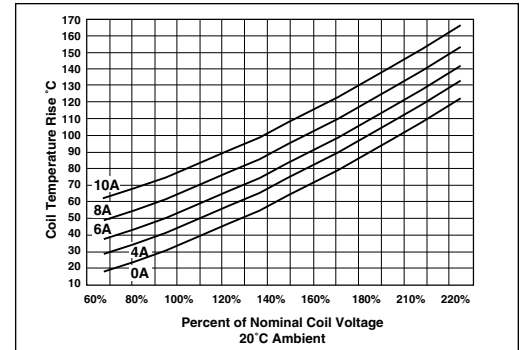

## Maximum Switching Capacity

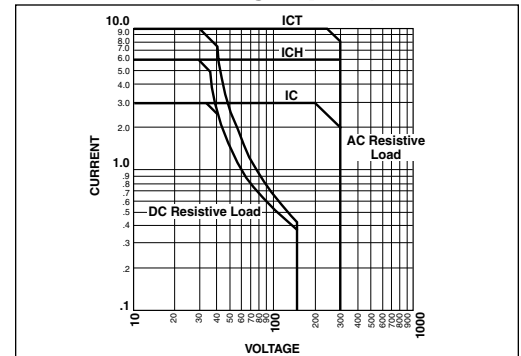

# AMERICAN ZETTLER, INC.

[www.azettler.com](http://www.azettler.com)


75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

11/14/06W


## HERMETICALLY SEALED VERSION



### MECHANICAL DATA

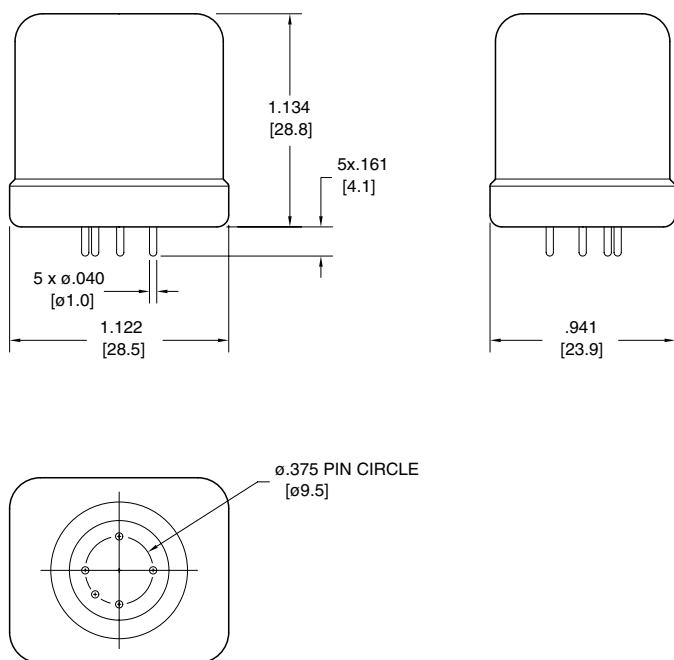


### PC BOARD LAYOUT

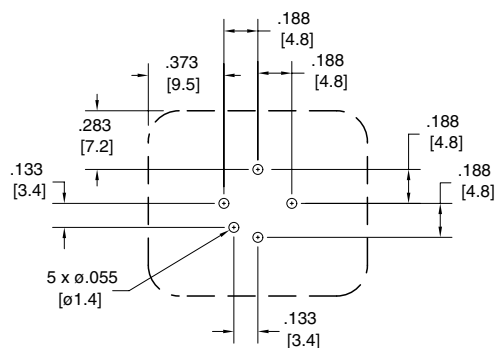

VIEWED TOWARD TERMINALS

### WIRING DIAGRAMS

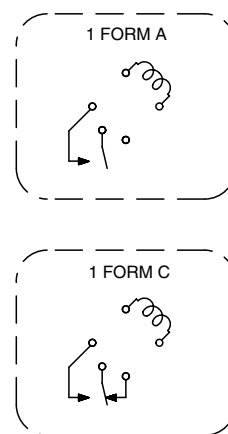

VIEWED TOWARD TERMINALS



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

11/14/06W

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)