

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Multi-level terminal block, Connection method: Spring-cage/plug-in connection, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS 35/7,5, NS 35/15

The illustration shows the version without engagement pin

### Product Features

- ✓ Can be labeled at each terminal point
- ✓ Design width of just 5.2 mm
- ✓ Four feed-through levels



### Key commercial data

|                                      |           |
|--------------------------------------|-----------|
| Packing unit                         | 1 1       |
| Minimum order quantity               | 50 1      |
| Weight per Piece (excluding packing) | 25.67 GRM |
| Custom tariff number                 | 85369010  |
| Country of origin                    | Germany   |

### Technical data

#### General

|                                         |      |
|-----------------------------------------|------|
| Number of levels                        | 4    |
| Number of connections                   | 6    |
| Color                                   | gray |
| Insulating material                     | PA   |
| Inflammability class according to UL 94 | V0   |
| Rated surge voltage                     | 4 kV |
| Pollution degree                        | 3    |
| Surge voltage category                  | III  |
| Insulating material group               | I    |

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Technical data

#### General

|                                  |           |
|----------------------------------|-----------|
| Connection in acc. with standard | IEC 61984 |
| Nominal current $I_N$            | 24 A      |
| Nominal voltage $U_N$            | 500 V     |
| Open side panel                  | ja        |

#### Dimensions

|                  |          |
|------------------|----------|
| Width            | 5.2 mm   |
| Length           | 120.5 mm |
| Height NS 35/7,5 | 59 mm    |
| Height NS 35/15  | 66.5 mm  |

#### Connection data

|                                                                                         |                                |
|-----------------------------------------------------------------------------------------|--------------------------------|
| Conductor cross section solid min.                                                      | 0.08 mm <sup>2</sup>           |
| Conductor cross section solid max.                                                      | 4 mm <sup>2</sup>              |
| Conductor cross section stranded min.                                                   | 0.08 mm <sup>2</sup>           |
| Conductor cross section stranded max.                                                   | 2.5 mm <sup>2</sup>            |
| Conductor cross section AWG/kcmil min.                                                  | 28                             |
| Conductor cross section AWG/kcmil max                                                   | 12                             |
| Conductor cross section stranded, with ferrule without plastic sleeve min.              | 0.14 mm <sup>2</sup>           |
| Conductor cross section stranded, with ferrule without plastic sleeve max.              | 2.5 mm <sup>2</sup>            |
| Conductor cross section stranded, with ferrule with plastic sleeve min.                 | 0.14 mm <sup>2</sup>           |
| Conductor cross section stranded, with ferrule with plastic sleeve max.                 | 2.5 mm <sup>2</sup>            |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 0.5 mm <sup>2</sup>            |
| Connection method                                                                       | Spring-cage/plug-in connection |
| Minimum stripping length                                                                | 8 mm                           |
| Maximum stripping length                                                                | 10 mm                          |
| Internal cylindrical gage                                                               | A3                             |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141117 |
| eCl@ss 4.1 | 27141117 |
| eCl@ss 5.0 | 27141120 |
| eCl@ss 5.1 | 27141120 |
| eCl@ss 6.0 | 27141120 |
| eCl@ss 7.0 | 27141120 |

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 8.0 | 27141120 |
|------------|----------|

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000897 |
| ETIM 3.0 | EC000897 |
| ETIM 4.0 | EC000897 |
| ETIM 5.0 | EC000897 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121410 |
| UNSPSC 12.01  | 39121410 |
| UNSPSC 13.2   | 39121410 |

### Approvals

#### Approvals

#### Approvals

CSA / UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

#### Ex Approvals

#### Approvals submitted

### Approval details

|                                                                                         |       |
|-----------------------------------------------------------------------------------------|-------|
| CSA  |       |
|                                                                                         | B     |
| mm²/AWG/kcmil                                                                           | 28-12 |
| Nominal current I <sub>N</sub>                                                          | 10 A  |
| Nominal voltage U <sub>N</sub>                                                          | 300 V |

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Approvals

| UL Recognized  |       |       |
|-------------------------------------------------------------------------------------------------|-------|-------|
|                                                                                                 | B     | D     |
| mm <sup>2</sup> /AWG/kcmil                                                                      | 28-12 | 28-12 |
| Nominal current I <sub>N</sub>                                                                  | 10 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                  | 300 V | 300 V |

| cUL Recognized  |       |       |
|--------------------------------------------------------------------------------------------------|-------|-------|
|                                                                                                  | B     | D     |
| mm <sup>2</sup> /AWG/kcmil                                                                       | 28-12 | 28-12 |
| Nominal current I <sub>N</sub>                                                                   | 10 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                   | 300 V | 300 V |

|                                                                                          |  |  |
|------------------------------------------------------------------------------------------|--|--|
| GOST  |  |  |
|------------------------------------------------------------------------------------------|--|--|

|                                                                                          |  |  |
|------------------------------------------------------------------------------------------|--|--|
| GOST  |  |  |
|------------------------------------------------------------------------------------------|--|--|

|                                                                                                      |  |  |
|------------------------------------------------------------------------------------------------------|--|--|
| cULus Recognized  |  |  |
|------------------------------------------------------------------------------------------------------|--|--|

### Accessories

#### Accessories

#### Bridge

Potential bridge - FBS-PV PT 2,5-4L - 3012318



Vertical bridge between two levels

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Plug-in bridge - FBS 2-5 - 3030161



Plug-in bridge, Number of positions: 2, Color: red

---

Plug-in bridge - FBS 3-5 - 3030174



Plug-in bridge, Number of positions: 3, Color: red

---

Plug-in bridge - FBS 4-5 - 3030187



Plug-in bridge, Number of positions: 4, Color: red

---

Plug-in bridge - FBS 5-5 - 3030190



Plug-in bridge, Number of positions: 5, Color: red

---

Plug-in bridge - FBS 10-5 - 3030213



Plug-in bridge, Number of positions: 10, Color: red

---

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Plug-in bridge - FBS 20-5 - 3030226



Plug-in bridge, Number of positions: 20, Color: red

---

Plug-in bridge - FBS 50-5 - 3038930



Plug-in bridge, Number of positions: 50, Color: red

---

### Cable housing

Cable housing - PH CP-H 2,5/2 - 3012332



Cable housing, Width: 10.4 mm, Number of positions: 2, Color: gray

---

Cable housing - PH CP-H 2,5/3 - 3012333



Cable housing, Width: 15.6 mm, Number of positions: 3, Color: gray

---

Cable housing - PH CP-H 2,5/4 - 3012334



Cable housing, Width: 20.8 mm, Number of positions: 4, Color: gray

---

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Cable housing - PH CP-H 2,5/5 - 3012335



Cable housing, Width: 26 mm, Number of positions: 5, Color: gray

---

### Cable tie

Cable tie - WT-HF 2,5X98 BK - 3240733



Cable binders for quick and secure bundling, standard version

---

### Documentation

Mounting material - ST-IL - 3039900



Operating decal for the ST terminal block

---

### End block

End clamp - CLIPFIX 35 - 3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

End clamp - CLIPFIX 35-5 - 3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

End clamp - E/NS 35 N - 0800886



End clamp, width: 9.5 mm, color: gray

End cover

End cover - D-ST 2,5-4L/2P - 3041927



End cover, Length: 120.5 mm, Width: 2.2 mm, Height: 57 mm, Color: gray

Spacer plate - DP PS-5 - 3036725



Spacer plate, Color: red

Flange

Flange - PT 2,5-4L/2P-FS - 3012312



Flange, Length: 125 mm, Width: 5.2 mm

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

---

#### Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663



Insulating sleeve, Color: white

---

Insulating sleeve - MPS-IH RD - 0201676



Insulating sleeve, Color: red

---

Insulating sleeve - MPS-IH BU - 0201689



Insulating sleeve, Color: blue

---

Insulating sleeve - MPS-IH YE - 0201692



Insulating sleeve, Color: yellow

---

Insulating sleeve - MPS-IH GN - 0201702



Insulating sleeve, Color: green

---

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Insulating sleeve - MPS-IH GY - 0201728



Insulating sleeve, Color: gray

Insulating sleeve - MPS-IH BK - 0201731



Insulating sleeve, Color: black

Insulation stop sleeve - ISH 2,5/0,2 - 3002843



Insulation stop sleeve, Color: white

Insulation stop sleeve - ISH 2,5/0,5 - 3002856



Insulation stop sleeve, Color: gray

Insulation stop sleeve - ISH 2,5/1,0 - 3002869



Insulation stop sleeve, Color: black

### Labeled terminal marker

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

#### Zack marker strip - ZB 5 CUS - 0824962



Zack marker strip, Can be ordered: Strip, white, Labeled according to customer specifications, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

---

#### Marker for terminal blocks - UC-TM 5 CUS - 0824581



Marker for terminal blocks, Can be ordered: By sheet, white, Labeled according to customer specifications, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 10.5 x 4.6 mm

---

#### Marker for terminal blocks - UCT-TM 5 CUS - 0829595



Marker for terminal blocks, Can be ordered: By sheet, white, Labeled according to customer specifications, Mounting type: Snap into tall marker groove, Lettering field: 4.6 x 10.5 mm

---

#### Zack Marker strip, flat - ZBF 5 CUS - 0825025



Zack Marker strip, flat, Can be ordered: Strip, white, Labeled according to customer specifications, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

---

#### Marker for terminal blocks - UC-TMF 5 CUS - 0824638



Marker for terminal blocks, Can be ordered: By sheet, white, Labeled according to customer specifications, Mounting type: Snap into flat marker groove, For terminal block width: 5.2 mm, Lettering field: 4.6 x 5.1 mm

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Marker for terminal blocks - UCT-TMF 5 CUS - 0829658



Marker for terminal blocks, Can be ordered: By sheet, white, Labeled according to customer specifications, Mounting type: Snap into flat marker groove, For terminal block width: 5.2 mm, Lettering field: 4.4 x 4.7 mm

---

### Mounting rail

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733



DIN rail, material: steel galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2000 mm

---

DIN rail - NS 35/ 7,5 UNPERF 2000MM - 0801681



DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m

---

DIN rail - NS 35/ 7,5 WH PERF 2000MM - 1204119



DIN rail 35 mm (NS 35)

---

DIN rail - NS 35/ 7,5 WH UNPERF 2000MM - 1204122



DIN rail 35 mm (NS 35)

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704



DIN rail, unperforated, Width: 35 mm, Height: 7.5 mm, Length: 2000 mm, Color: silver

DIN rail - NS 35/ 7,5 ZN PERF 2000MM - 1206421



DIN rail, material: Galvanized, perforated, height 7.5 mm, width 35 mm, length: 2 m

DIN rail - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



DIN rail, material: Galvanized, unperforated, height 7.5 mm, width 35 mm, length: 2 m

DIN rail - NS 35/ 7,5 CU UNPERF 2000MM - 0801762



DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m

End cap - NS 35/ 7,5 CAP - 1206560



DIN rail end piece, for DIN rail NS 35/7.5

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730



DIN rail, material: steel galvanized and passivated with a thick layer, perforated, height 15 mm, width 35 mm, length: 2000 mm

DIN rail - NS 35/15 UNPERF 2000MM - 1201714



DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m

DIN rail - NS 35/15 WH PERF 2000MM - 0806602



DIN rail 35 mm (NS 35)

DIN rail - NS 35/15 WH UNPERF 2000MM - 1204135



DIN rail 35 mm (NS 35)

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756



DIN rail, deep drawn, high profile, unperforated, 1.5 mm thick, material: aluminum, height 15 mm, width 35 mm, length 2000 mm

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

DIN rail - NS 35/15 ZN PERF 2000MM - 1206599



DIN rail, material: Galvanized, perforated, height 15 mm, width 35 mm, length: 2 m

---

DIN rail - NS 35/15 ZN UNPERF 2000MM - 1206586



DIN rail, material: Galvanized, unperforated, height 15 mm, width 35 mm, length: 2 m

---

DIN rail - NS 35/15 CU UNPERF 2000MM - 1201895



DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m

---

End cap - NS 35/15 CAP - 1206573



DIN rail end piece, for DIN rail NS 35/15

---

DIN rail - NS 35/15-2,3 UNPERF 2000MM - 1201798



DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m

---

Planning and marking software

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

#### Software - CLIP-PROJECT ADVANCED - 5146040



Multilingual software for easy planning of Phoenix Contact on DIN rails together with the integrated TRABTECH-select software module for planning comprehensive surge protection concepts.

---

#### Software - CLIP-PROJECT PROFESSIONAL - 5146053



Multi-lingual software for terminal strip project planning. A marking module allows professional labeling of markers and labels for marking terminal blocks, conductors, cables and devices. The additionally integrated software module TRABTECH-select for planning comprehensive surge protection concepts.

---

### Screwdriver tools

#### Screwdriver - SZF 1-0,6X3,5 - 1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

### Terminal marking

#### Zack marker strip - ZB 5 :UNBEDRUCKT - 1050004



Zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 5.1 x 10.5 mm

---

#### Marker for terminal blocks - UC-TM 5 - 0818108



Marker for terminal blocks, Sheet, white, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 10.5 x 4.6 mm

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

---

#### Marker for terminal blocks - UCT-TM 5 - 0828734



Marker for terminal blocks, Sheet, white, Unlabeled, Can be labeled with: THERMOMARK CARD PLUS, THERMOMARK CARD, BLUEMARK CLED, BLUEMARK LED, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 4.6 x 10.5 mm

#### Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.1 x 5.2 mm

#### Marker for terminal blocks - UC-TMF 5 - 0818153



Marker for terminal blocks, Sheet, white, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 5.2 mm, Lettering field: 4.6 x 5.1 mm

#### Marker for terminal blocks - UCT-TMF 5 - 0828744



Marker for terminal blocks, Sheet, white, Unlabeled, Can be labeled with: THERMOMARK CARD PLUS, THERMOMARK CARD, BLUEMARK CLED, BLUEMARK LED, Mounting type: Snap into flat marker groove, For terminal block width: 5.2 mm, Lettering field: 4.4 x 4.7 mm

#### Test plug terminal block

#### Test plugs - MPS-MT - 0201744



Test plugs, Color: silver

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Test adapter - PAI-4-FIX-5/6 BU - 3035975



Test adapter, for 4 mm Ø safety test plugs, latches into the bridge shaft; color: Blue

---

Test adapter - PAI-4-FIX-5/6 OG - 3035974



Test adapter, for 4 mm Ø safety test plugs, latches into the bridge shaft; color: Orange

---

Test adapter - PAI-4-FIX-5/6 YE - 3035977



Test adapter, for 4 mm Ø safety test plugs, latches into the bridge shaft; color: Yellow

---

Test adapter - PAI-4-FIX-5/6 RD - 3035976



Test adapter, for 4 mm Ø safety test plugs, latches into the bridge shaft; color: Red

---

Test adapter - PAI-4-FIX-5/6 GN - 3035978



Test adapter, for 4 mm Ø safety test plugs, latches into the bridge shaft; color: Green

---

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Test adapter - PAI-4-FIX-5/6 BK - 3035980



Test adapter, for 4 mm Ø safety test plugs, latches into the bridge shaft; color: Black

---

Test adapter - PAI-4-FIX-5/6 GY - 3035982



Test adapter, for 4 mm Ø safety test plugs, latches into the bridge shaft; color: Gray

---

Test adapter - PAI-4-FIX-5/6 VT - 3035979



Test adapter, for 4 mm Ø safety test plugs, latches into the bridge shaft; color: Violet

---

Test adapter - PAI-4-FIX-5/6 BN - 3035981



Test adapter, for 4 mm Ø safety test plugs, latches into the bridge shaft; color: Brown

---

Test adapter - PS-5 - 3030983



Test adapter, Color: red

---

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Test plugs - PS-5/2,3MM RD - 3038723



Test plugs, Color: red

---

### Required add-on products

Connector housing - CP 2,5-4L - 3041956



Connector housing, Connection method: Special and hybrid connection, Number of positions: 4, Cross section: 0.5 mm<sup>2</sup> - 2.5 mm<sup>2</sup>, AWG: 20 - 14, Width: 5.2 mm, Height: 13 mm, Color: gray

---

Connector housing - CP 2,5-4L-Z - 3041943



Connector housing, Connection method: Special and hybrid connection, Number of positions: 1, Cross section: 0.5 mm<sup>2</sup> - 2.5 mm<sup>2</sup>, AWG: 20 - 14, Width: 5.2 mm, Height: 13 mm, Color: gray

---

Female insert - STG-MTN 0,5-1,0 - 3190438



Module socket contact, inserted in the PCC or HCC plug housing after crimping the conductor, for 0.5 mm<sup>2</sup> ... 1.0 mm<sup>2</sup> conductors

---

Female insert - STG-MTN 1,5-2,5 - 3190506



Module socket contact, inserted in the PCC or HCC plug housing after crimping the conductor, for 1.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup> conductors

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Crimping pliers - CRIMPFOX MT 2,5 - 1204038



Crimping pliers, for crimping conductors to the module female contacts STG-MTN, crimp range: 0.5-2.5 mm<sup>2</sup>, AWG: 20-14

---

Cover profile - AP-CP-H METER - 3012315



Cover profile, length: 1 m

---

End cover - D-CP-H 2,5-4L - 3012320



End cover, Length: 31.6 mm, Width: 5.2 mm, Color: gray

---

Flange cover - DFS-CP-H 2,5-4L - 3012317



Cover profile carrier with self-locking flange cover, for CP-H 2,5-4L, can be adapted on both sides of the plug

---

Flange cover - DFS-CP 2,5-4L - 3012321



Flange cover, Length: 31.6 mm, Width: 5.2 mm, Height: 26 mm, Color: gray

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

### Accessories

Spacer plate - DP-CP-H 2,5-4L - 3012319



Spacer plate

---

Connector housing - CP-H 2,5-4L - 3012313



Connector housing, Length: 31.6 mm, Width: 5.2 mm, Height: 31.7 mm

---

Connector housing - CP-H 2,5-4L-Z - 3012314




Connector housing, Length: 31.6 mm, Width: 5.2 mm, Height: 31.7 mm

---


### Drawings

## Multi-level terminal block - ST 2,5-4L/2P-Z - 3041998

Circuit diagram



Diagram

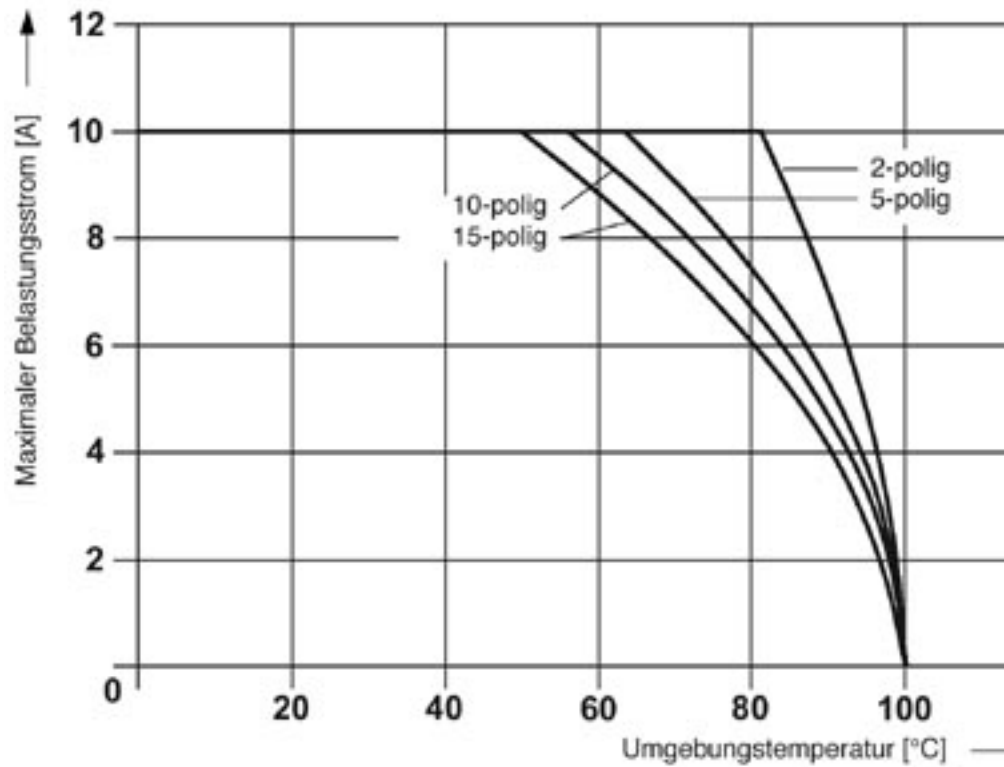

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)