



TAOGLAS®



Datasheet

GNSS Hercules

Part No:
A.40.A.301111

Description:

GPS/GLONASS/Galileo Hercules Heavy Duty Permanent Mount Antenna

Features:

Bands Covered:

- GPS L1
- GLONASS G1
- Galileo E1

Heavy duty Permanent mount

IP69K Waterproof Rating

Dimensions: Ø48*29mm

Cable: 3m RG-174

Connector: SMA(M) Straight

RoHS & Reach Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	6
4. Radiation Patterns	8
5. Mechanical Drawing	10
6. Footprint	11
7. Packaging	12
Changelog	13

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The A.40 Hercules is an active high-performance permanent mount GPS/GLONASS/Galileo antenna designed for external use on vehicles and outdoor assets. Durable UV resistant PC housing is resistant to vandalism and direct attack. At only 29mm high it complies with the latest EU directives for height restrictions, whilst also enabling covert operation with a diameter of only 49mm. The antenna is completely waterproof with an IP67 rating, plus an additional IP69K rating for waterproof resistance against high pressure water jets used in cleaning.

Typical Applications Include:

- Remote Asset Tracking
- Navigation
- Telematics Devices

The cable and connector is fully customizable, for further information, please contact your regional Taoglas customer support team.

2. Specifications

GNSS Frequency Bands Covered							
GPS/QZSS	L1 1575.42MHz	L2 1227.6MHz	L5 1176.45MHz	L6 1278.75MHz			
	■	□	□	□			
GLONASS	L5R 1176.45MHz	L3PT 1201.5MHz	L2PT 1246MHz	L1CR 1575.42MHz	L1PT 1602MHz		
	□	□	□	■	■		
Galileo	E5a 1176.45MHz	E5b 1201.5MHz	E4 1215MHz	E3 1256MHz	E6 1278.75MHz	E2 1561MHz	E1 1575.42MHz
	□	□	□	□	□	□	■
BeiDou	B1 1561MHz	B2 1207.14MHz	B3 1268.52MHz				
	□	□	□				
Compass	E5B(B2)/ E6(B3) 1268.56MHz	E2(B1) 1561MHz					
	□	□					
SBAS	Omnistar 1542.5MHz	WAAS/EGN OS 1575.42MHz					
	□	■					

GNSS Electrical	
Frequency (MHz)	1574 ~ 1606
VSWR (max.)	2.0:1
Impedance (Ohm)	50Ω
Axial ratio	3.0dB max
Polarization	RHCP
Input Voltage(V)	Typ. 2.5~5.5V
Total Gain @ Zenith	27dB typical at 3.0V
Current consumption(mA)	10mA typical at 3.0V
Noise figure	1.3dB typical
GPS/GALILEO Gain@ Zenith	-1.4dB Passive Gain @ Zenith
GLONASS Patch Gain@ Zenith	-1.3dBi Gain @ Zenith
Out Band Rejection	fo = 1575.42MHz fo ± 30 MHz 5dB Min. fo ± 50 MHz 20dB Min. fo ± 100 MHz 25dB Min.


Mechanical	
Dimensions	Ø49mm Height 28.5mm
Cable type	RG-174
Cable length	3000mm
Casing	UV Resistant PC
Connector	SMA Male Straight
Recommended Mounting Torque	24.5N·m
Maximum Mounting Torque	29.4N·m
Environmental	
Temperature Range	-40°C to 85°C
Waterproof	IP67 and IP69K
Thermal Shock	100 cycles -40°C to +85°C
Shock (drop test)	1m drop on concrete 6 axes
Humidity	Non-condensing 65°C 95% RH

3. Antenna Characteristics

3.1 Return Loss



3.2 Smith Chart

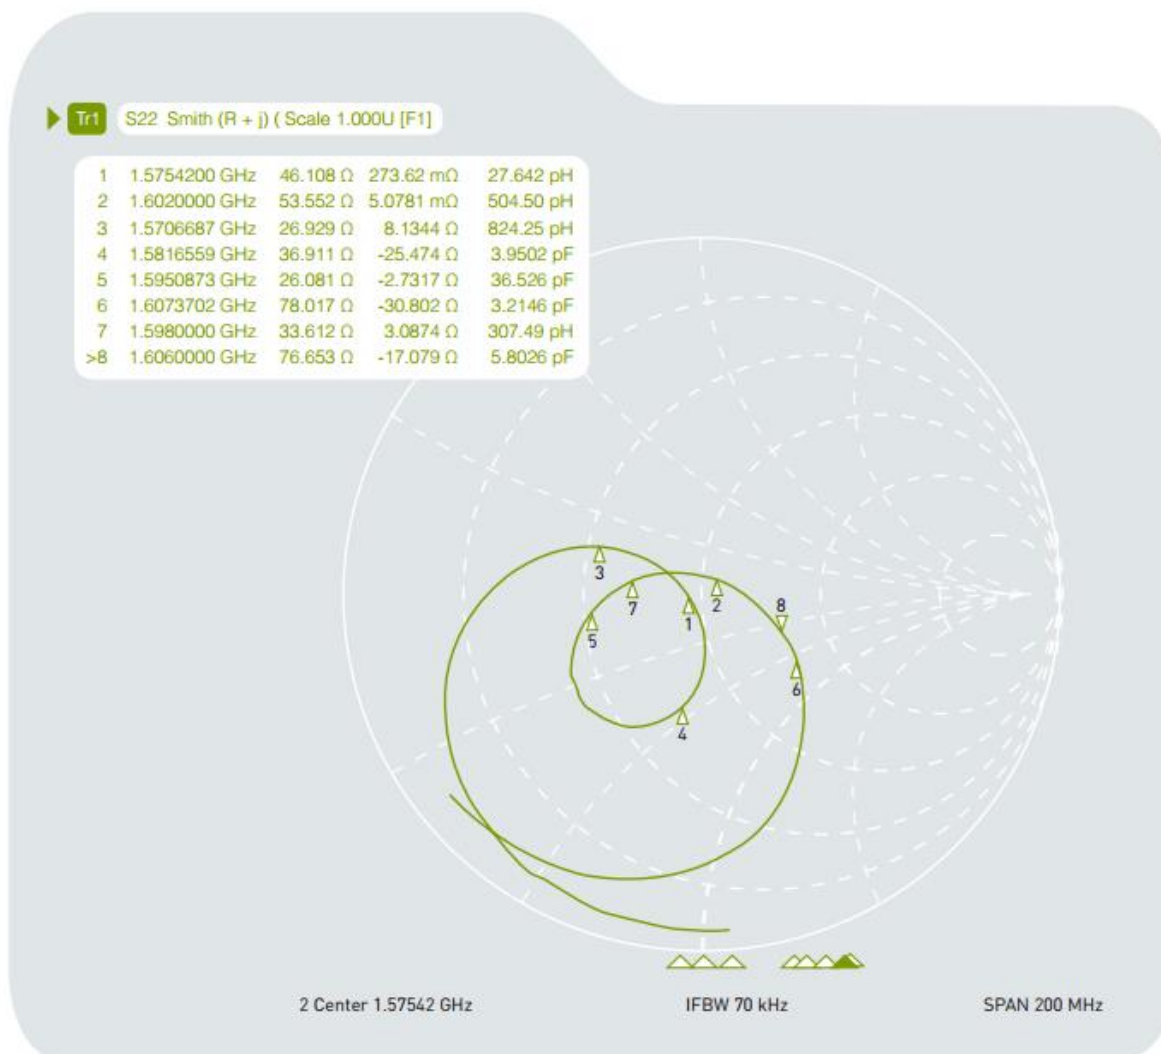

4. Radiation Patterns

4.1 Test Setup


H-Plane




E-Plane




4.2 1575.42MHz

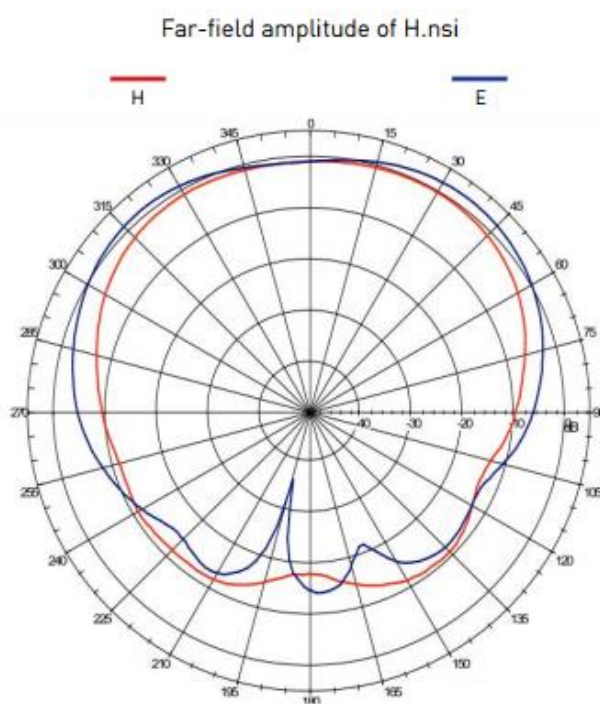


4.3 1602MHz

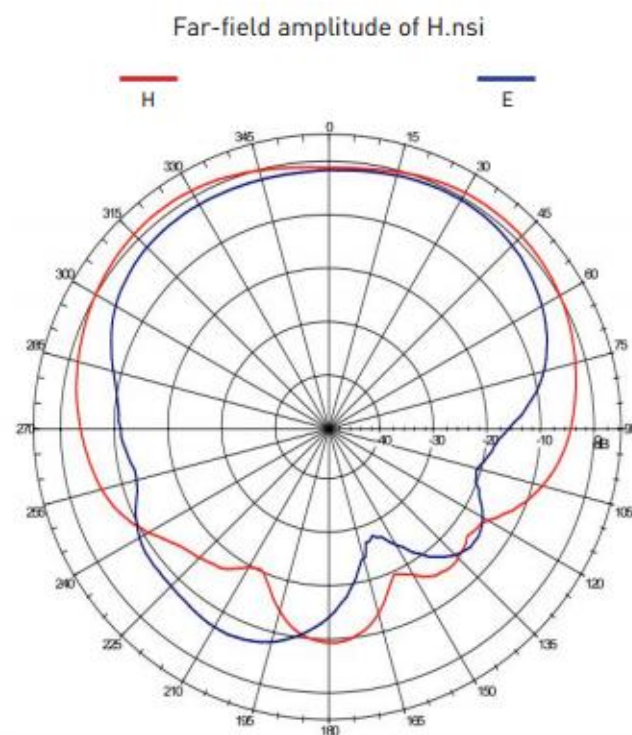

5. Mechanical Drawing (Units: mm)

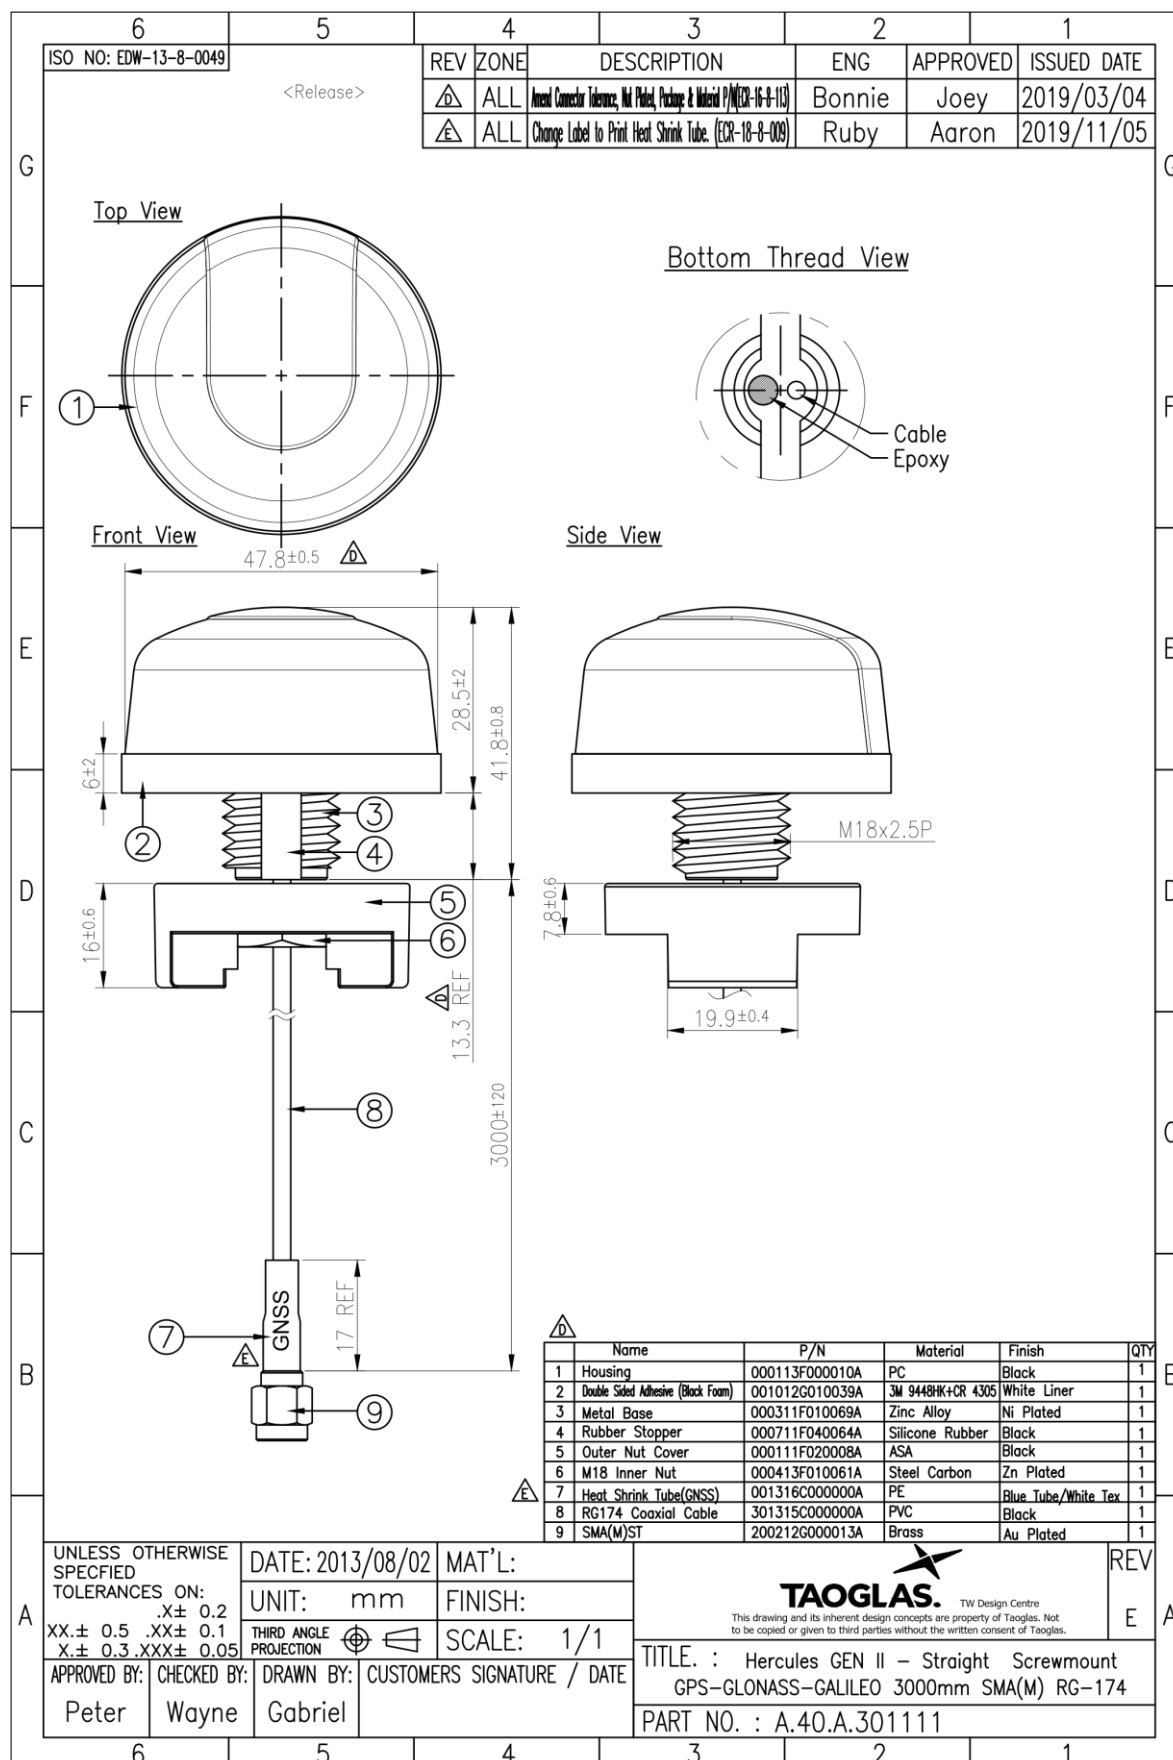


6. Installation

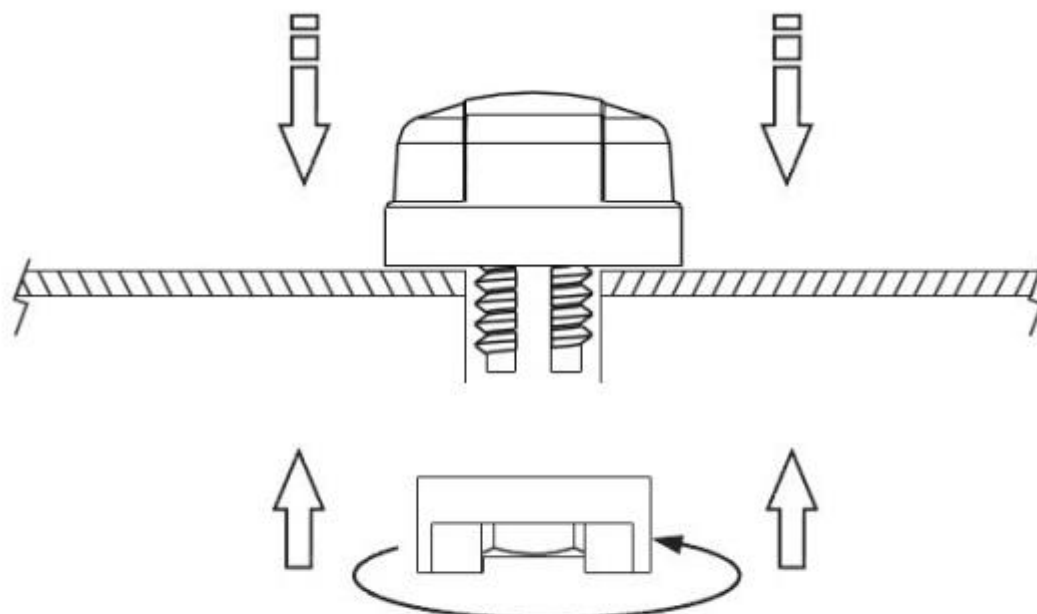

Recommended torque for Mounting is 24.5N·m
Maximum torque for mounting is 29.4 N·m

7. Packaging


1pc A.40.A.301111 per PE Bag
Dimensions: 100*300mm
Weight: 151g



100mm

300mm


10 pcs A.40.A.301111 per Large PE Bag
Dimensions: 280*450mm
Weight: 1.524Kg



280mm

450mm

60pcs A.40.A.301111 per carton
Dimensions - 320*250*230mm
Weight – 9.8Kg

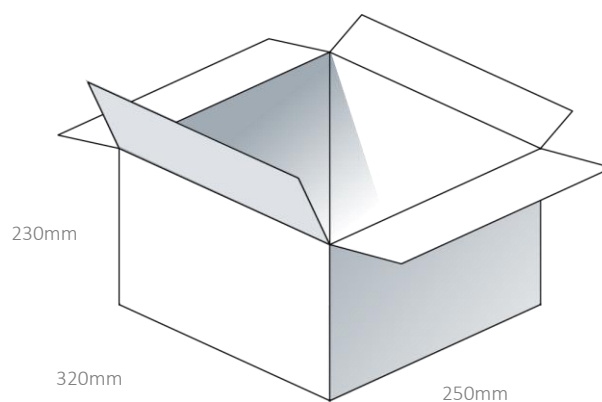


230mm

320mm

250mm

Pallet Dimensions:
1200*1000*1650mm
60 Cartons per Pallet
12 Cartons per Layer, 5 Layers

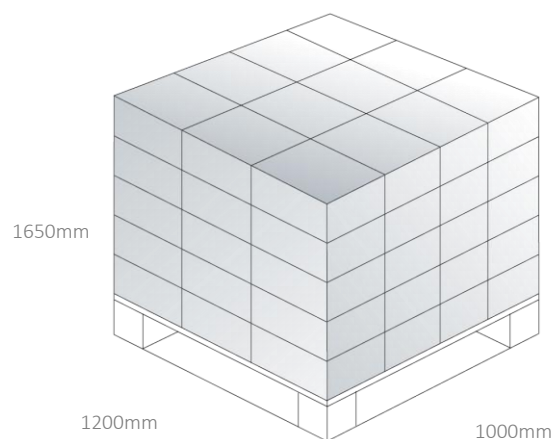

1650mm

1200mm

1000mm

Changelog for the datasheet

SPE-13-8-053 – A.40.A.301111

Revision: H (Current Version)

Date:	2020-03-27
Changes:	Updated Packaging and Template
Changes Made by:	Jack Conroy

Previous Revisions

Revision: G

Date:	2019-11-07
Changes:	Amended Drawing
Changes Made by:	Jack Conroy

Revision: B

Date:	2014-08-11
Changes:	Updated Torque Info
Changes Made by:	Aine Doyle

Revision: F

Date:	2019-01-22
Changes:	Amended Drawing
Changes Made by:	Jack Conroy

Revision: A (Original First Release)

Date:	2013-07-26
Notes:	
Author:	Wayne Yang

Revision: E

Date:	2018-12-12
Changes:	Amended Heatshrink Drawing
Changes Made by:	Jack Conroy

Revision: D

Date:	2016-06-01
Changes:	Amended Packaging and Info
Changes Made by:	Aine Doyle

Revision: C

Date:	2014-08-26
Changes:	Removed Saw info
Changes Made by:	Aine Doyle



www.taoglas.com



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru