

n-Channel Power MOSFET

OptiMOS™
BSB013NE2LXI


Data Sheet

2.3, 2011-09-16
Final

Industrial & Multimarket

1 Description

OptiMOS™25V products are class leading power MOSFETs for highest power density and energy efficient solutions. Ultra low gate and output charges together with lowest on state resistance in small footprint packages make OptiMOS™ 25V the best choice for the demanding requirements of voltage regulator solutions in Servers, Datacom and Telecom applications. Super fast switching Control FETs together with low EMI Sync FETs provide solutions that are easy to design in. OptiMOS™ products are available in high performance packages to tackle your most challenging applications giving full flexibility in optimizing space, efficiency and cost. OptiMOS™ products are designed to meet and exceed the energy efficiency and power density requirements of the sharpened next generation voltage regulation standards in computing applications.

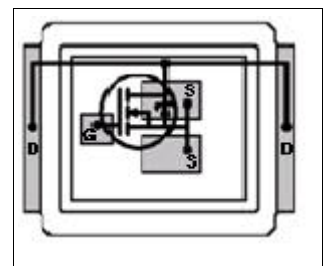

Features

- Optimized SyncFET for high performance buck converters
- 100% avalanche tested
- Qualified according to JEDEC¹⁾ for target applications
- Integrated monolithic Schottky like diode
- Pb-free plating; RoHS compliant
- Halogen-free according to IEC61249-2-21
- Double.sided cooling
- Compatible with DirectFET® package MX footprint and outline
- 100% Rg Tested
- Low profile (<0.7 mm)

Applications

- On board power for server
- Power managment for high performance computing
- Synchronous rectification
- High power density point of load converters



Table 1 Key Performance Parameters

Parameter	Value	Unit	Related Links
V_{DS}	25	V	IFX OptiMOS webpage IFX OptiMOS product brief IFX OptiMOS spice models IFX Design tools
$R_{DS(on),max}$	1.3	mΩ	
I_D	163	A	
Q_{OSS}	39	nC	
$Q_{g,typ}$	62		

Type	Package	Marking
BSB013NE2LXI	MG-WDSON-2	02E2

1) J-STD20 and JESD22

2 Maximum ratings

at $T_j = 25\text{ °C}$, unless otherwise specified.

Table 2 Maximum ratings

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Continuous drain current	I_D	-	-	163	A	$V_{GS}=10\text{ V}, T_C=25\text{ °C}$
		-	-	103		$V_{GS}=10\text{ V}, T_C=100\text{ °C}$
		-	-	36		$V_{GS}=10\text{ V}, T_A=25\text{ °C}, R_{thJA}=45\text{ K/W})^1)$
Pulsed drain current ²⁾	$I_{D,pulse}$	-	-	400		$T_C=25\text{ °C}$
Avalanche current, single pulse ³⁾	I_{AS}	-	-	40		
Avalanche energy, single pulse	E_{AS}	-	-	130	mJ	$I_D=40\text{ A}, R_{GS}=25\text{ }\Omega$
Gate source voltage	V_{GS}	-20	-	20	V	
Power dissipation	P_{tot}	-	-	57	W	$T_C=25\text{ °C}$
		-	-	2.8		$T_A=25\text{ °C}, R_{thJA}=45\text{ K/W}$
Operating and storage temperature	T_j, T_{stg}	-40	-	150	°C	
IEC climatic category; DIN IEC 68-1		-				

1) Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μ , thick) copper area for drain connection. PCB is vertical in still air

2) See figure 3 for more detailed information

3) See figure 13 for more detailed information

3 Thermal characteristics

Table 3 Thermal characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Thermal resistance, junction - case	R_{thJC}	-	1.0	-	K/W	bottom
		-	-	2.2		top
Device on PCB	R_{thJA}	-	-	45		6 cm ² cooling area ¹⁾

1) Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μ , thick) copper area for drain connection. PCB is vertical in still air.

4 Electrical characteristics

Electrical characteristics, at $T_j=25\text{ °C}$, unless otherwise specified.

Table 4 Static characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Drain-source breakdown voltage	$V_{(BR)DSS}$	25	-	-	V	$V_{GS}=0\text{ V}$, $I_D=10\text{ mA}$
Breakdown voltage temperature coefficient	$\frac{dV_{(BR)DSS}}{dT_j}$	-	15	-	mV/K	$I_D=10\text{ mA}$, reference to 25 °C
Gate threshold voltage	$V_{GS(th)}$	1.2	-	2		$V_{DS}=V_{GS}$, $I_D=250\text{ }\mu\text{A}$
Zero gate voltage drain current	I_{DSS}	-	25	500	μA	$V_{DS}=20\text{ V}$, $V_{GS}=0\text{ V}$, $T_j=25\text{ °C}$
		-	4	-	mA	$V_{DS}=20\text{ V}$, $V_{GS}=0\text{ V}$, $T_j=125\text{ °C}$
Gate-source leakage current	I_{GSS}	-	10	100	nA	$V_{GS}=20\text{ V}$, $V_{DS}=0\text{ V}$
Drain-source on-state resistance	$R_{DS(on)}$	-	1.4	1.8	m Ω	$V_{GS}=4.5\text{ V}$, $I_D=30\text{ A}$
		-	1.1	1.3		$V_{GS}=10\text{ V}$, $I_D=30\text{ A}$
Gate resistance	R_G	-	0.6	-	Ω	
Transconductance	g_{fs}	85	170	-	S	$ V_{DS} >2 I_D R_{DS(on)max}$, $I_D=30\text{ A}$

Table 5 Dynamic characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Input capacitance	C_{iss}	-	4400	-	pF	$V_{GS}=0\text{ V}$, $V_{DS}=12\text{ V}$, $f=1\text{ MHz}$
Output capacitance	C_{oss}	-	1900	-		
Reverse transfer capacitance	C_{rss}	-	190	-		
Turn-on delay time	$t_{d(on)}$	-	5.4	-	ns	$V_{DD}=12\text{ V}$, $V_{GS}=10\text{ V}$, $I_D=30\text{ A}$, $R_G=1.6\text{ }\Omega$
Rise time	t_r	-	6.4	-		
Turn-off delay time	$t_{d(off)}$	-	32	-		
Fall time	t_f	-	4.8	-		

Table 6 Gate charge characteristics¹⁾

Parameter	Symbol	Values			Unit	Note / Test Condition	
		Min.	Typ.	Max.			
Gate to source charge	Q_{gs}	-	10.5	-	nC	$V_{DD}=12\text{ V}$, $I_D=30\text{ A}$, $V_{GS}=0\text{ to }4.5\text{ V}$	
Gate charge at threshold	$Q_{g(th)}$	-	7.1	-			
Gate to drain charge	Q_{gd}	-	7.3	-			
Switching charge	Q_{sw}	-	10.7	-			
Gate charge total	Q_g	-	30	-			
Gate plateau voltage	$V_{plateau}$	-	2.4	-	V		
Gate charge total	Q_g	-	62	-	nC	$V_{DD}=12\text{ V}$, $I_D=30\text{ A}$, $V_{GS}=0\text{ to }10\text{ V}$	
Gate charge total, sync. FET	$Q_{g(sync)}$	-	26	-			$V_{DS}=0.1\text{ V}$, $V_{GS}=0\text{ to }4.5\text{ V}$
Output charge	Q_{oss}	-	39	-			$V_{DD}=12\text{ V}$, $V_{GS}=0\text{ V}$

1) See figure 16 for gate charge parameter definition

Table 7 Reverse diode characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Diode continuous forward current	I_s	-	-	57	A	$T_C=25\text{ °C}$
Diode pulse current	$I_{s,pulse}$	-	-	228		
Diode forward voltage	V_{SD}	-	0.55	0.7	V	$V_{GS}=0\text{ V}$, $I_F=12\text{ A}$, $T_j=25\text{ °C}$
Reverse recovery charge	Q_{rr}	-	5	-	nC	$V_R=15\text{ V}$, $I_F=I_s$, $di_F/dt=400\text{ A}/\mu\text{s}$

5 Electrical characteristics diagrams

Table 8

1 Power dissipation	2 Drain current
$P_{\text{tot}} = f(T_c)$	$I_D = f(T_c)$; parameter: V_{GS}

Table 9

3 Safe operating area $T_c = 25^\circ\text{C}$	4 Max. transient thermal impedance
$I_D = f(V_{DS})$; $T_c = 25^\circ\text{C}$; $D = 0$; parameter: T_p	$Z_{\text{th(jc)}} = f(t_p)$; parameter: $D = t_p/T$

Table 10

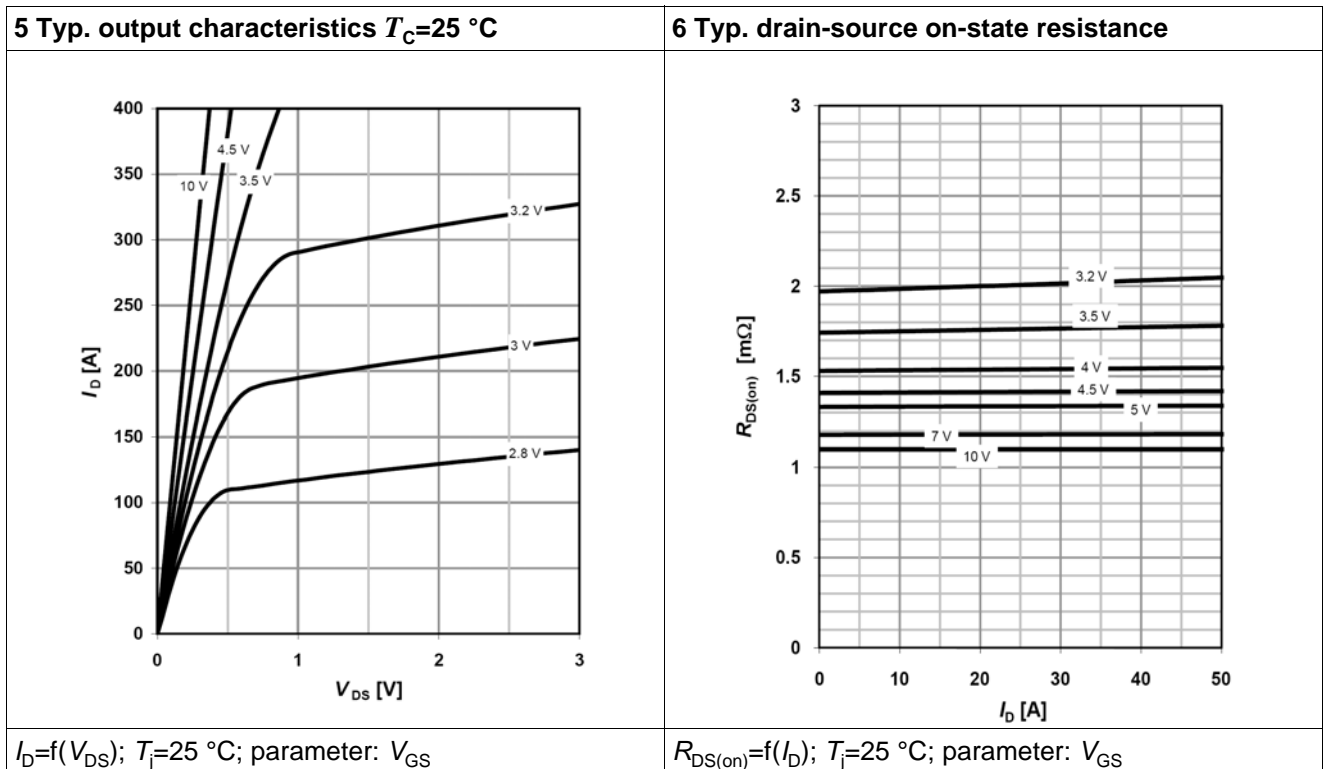


Table 11

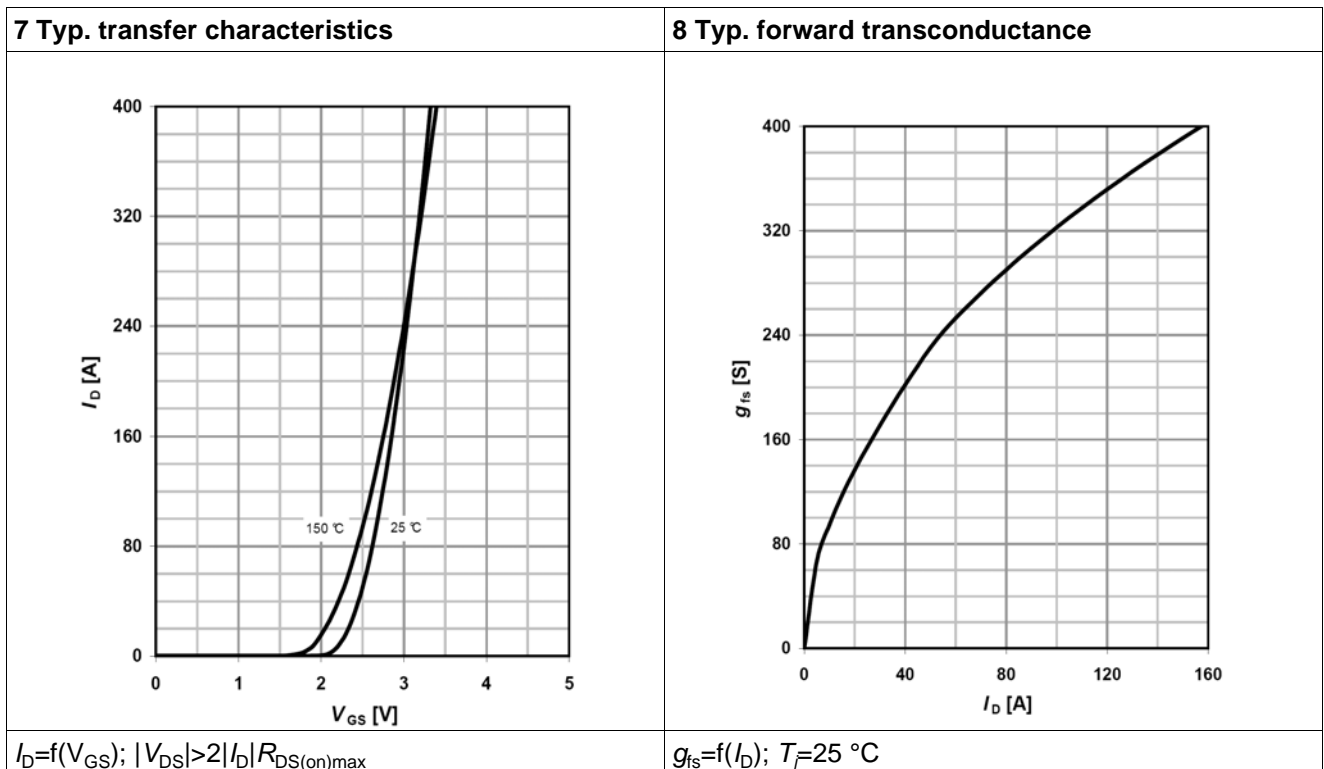


Table 12

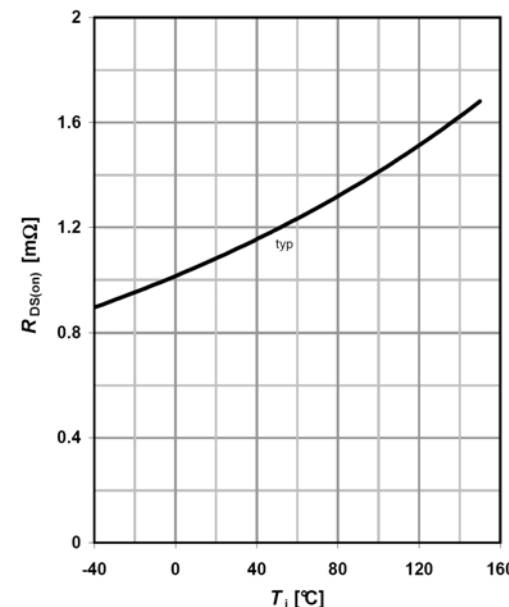
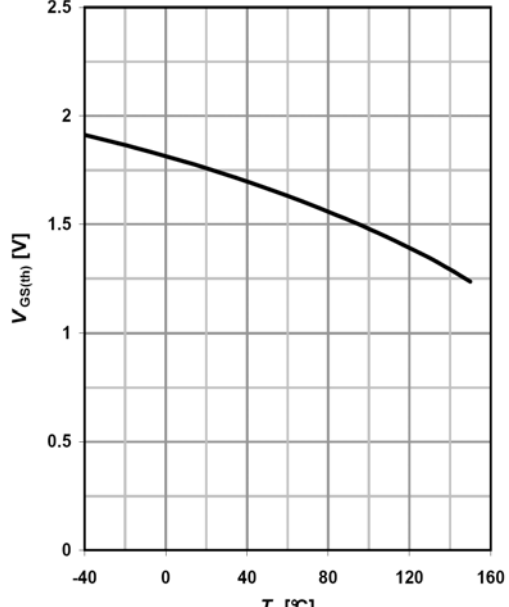
<p>9 Drain-source on-state resistance</p>  <p>$R_{DS(on)} = f(T_j); I_D = 30 \text{ A}; V_{GS} = 10 \text{ V}$</p>	<p>10 Typ. gate threshold voltage</p>  <p>$V_{GS(th)} = f(T_j); V_{GS} = V_{DS}; I_D = 10 \text{ mA}$</p>
--	--

Table 13

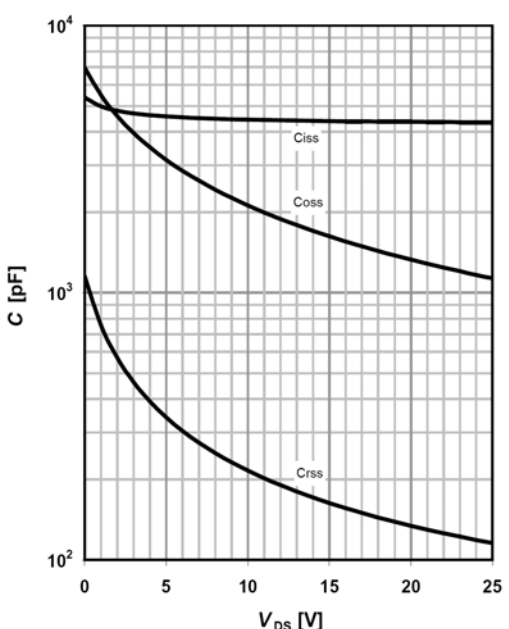
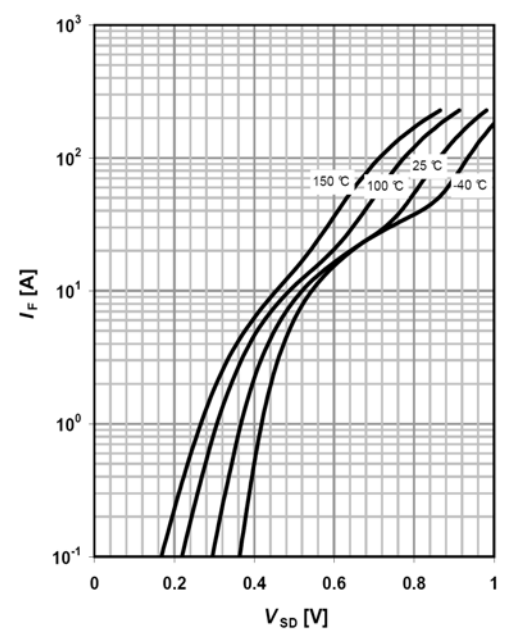
<p>11 Typ. capacitances</p>  <p>$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$</p>	<p>12 Forward characteristics of reverse diode</p>  <p>$I_F = f(V_{SD}); \text{parameter: } T_j$</p>
---	--

Table 14



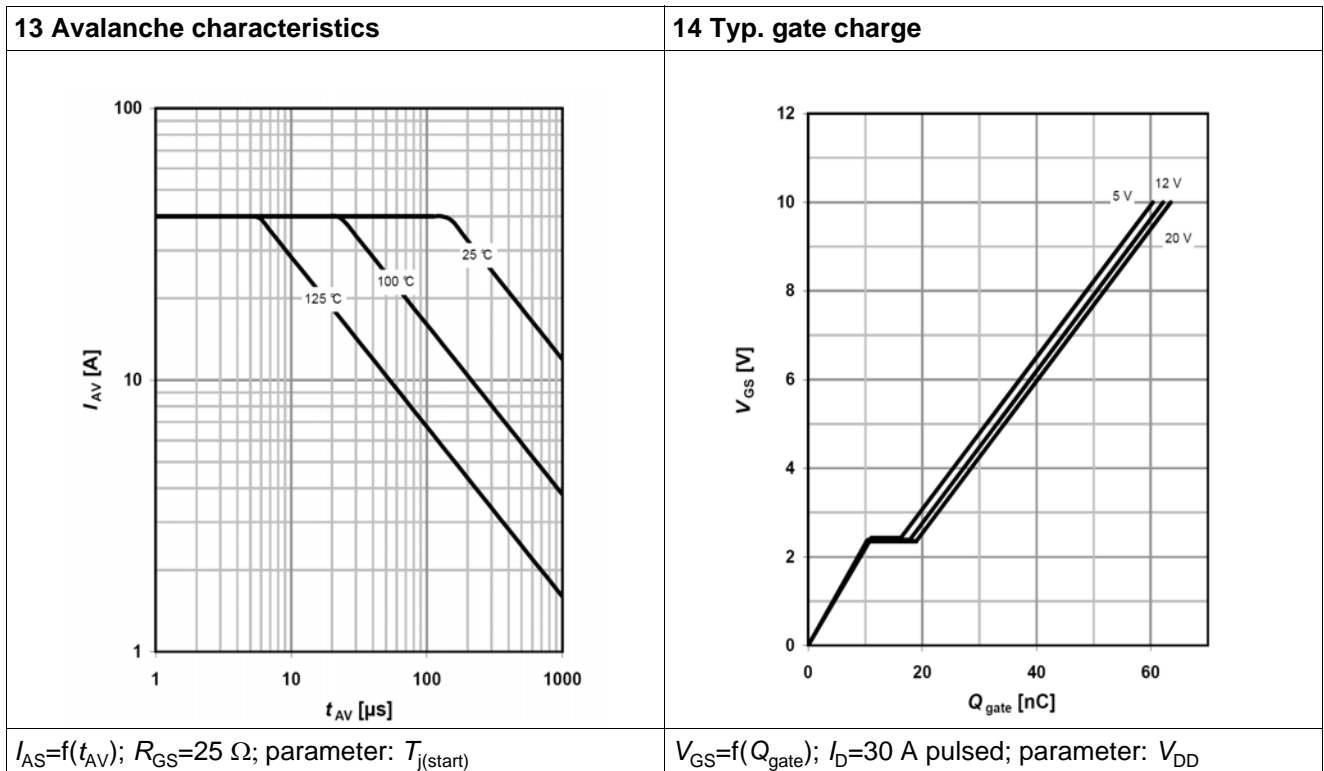


Table 15

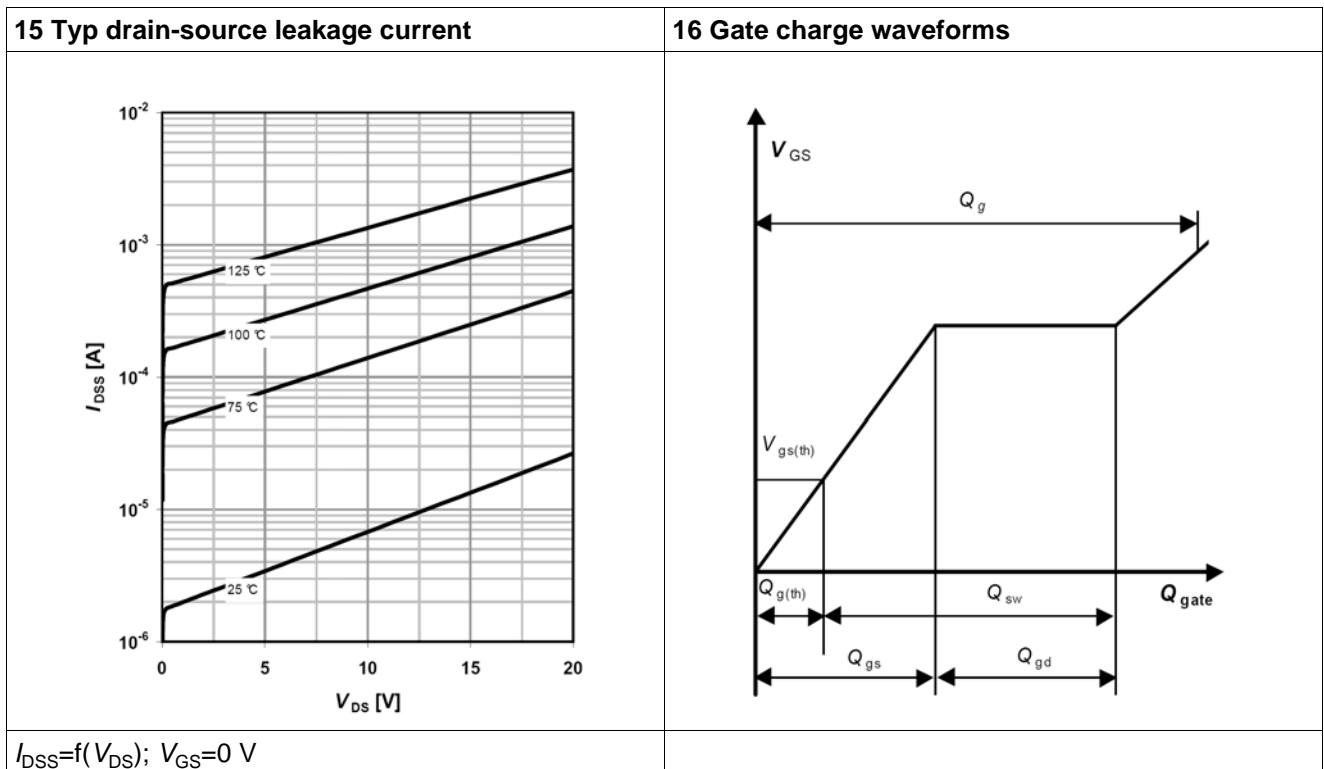

6 Package outlines

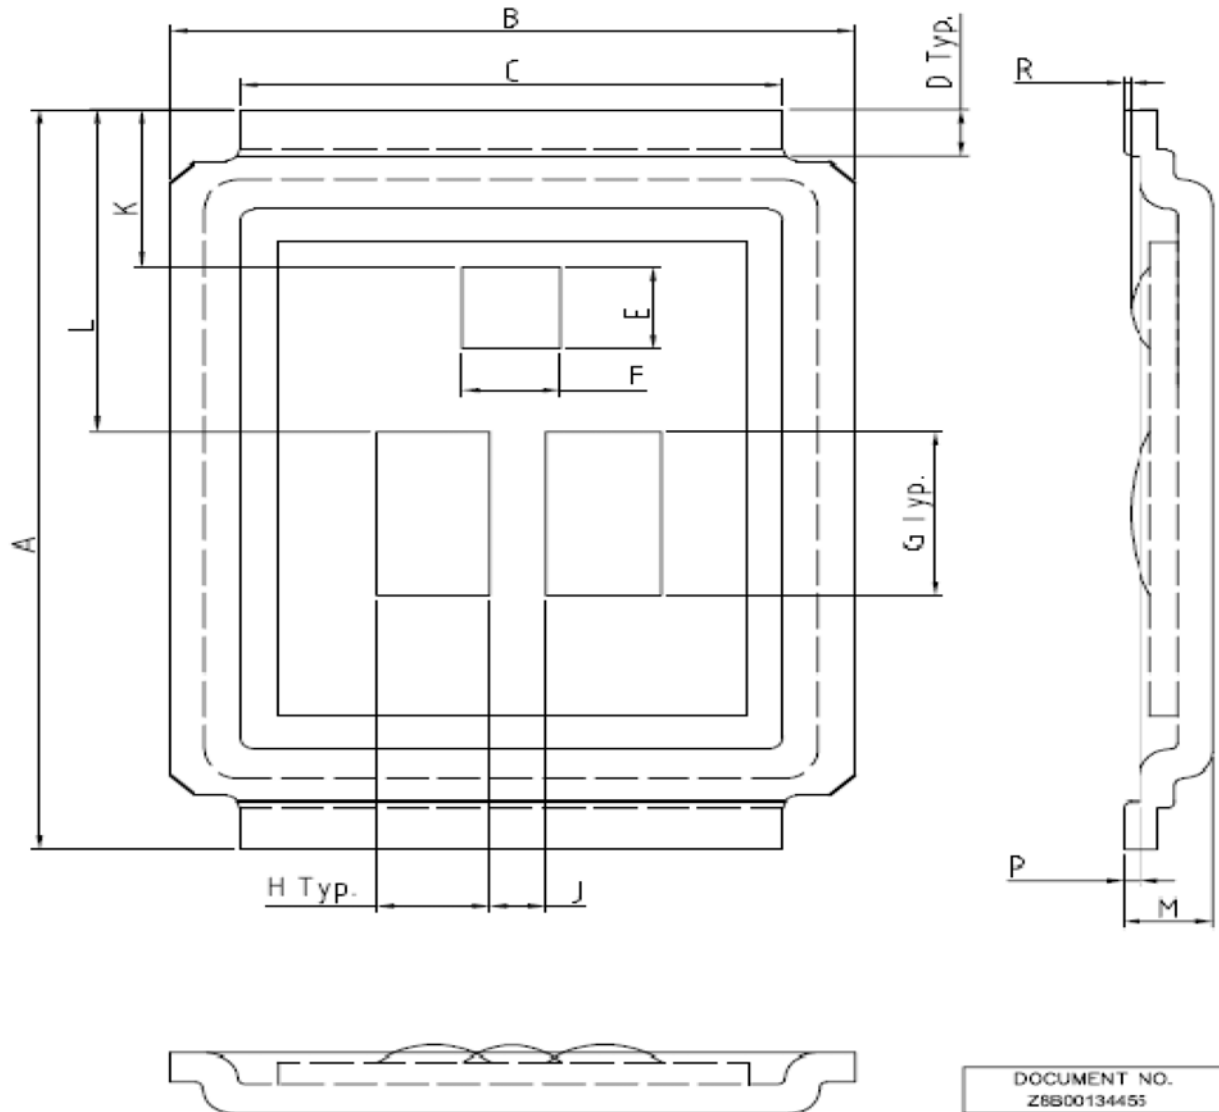

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.25	6.35	0.249	0.250
B	4.80	5.05	0.189	0.199
C	3.85	3.95	0.152	0.156
D	0.35	0.45	0.014	0.018
E	0.68	0.72	0.027	0.028
F	0.68	0.72	0.027	0.028
G	1.38	1.42	0.054	0.056
H	0.80	0.84	0.031	0.033
J	0.38	0.42	0.015	0.017
K	1.25	1.45	0.049	0.057
L	2.65	2.85	0.104	0.112
M	0.60	0.70	0.024	0.028
R	0.00	0.10	0.000	0.004
P	0.08	0.17	0.003	0.007

DOCUMENT NO.
Z8B00134455

SCALE

7.5mm

EUROPEAN PROJECTION

ISSUE DATE
05-05-2006

REVISION
03

Figure 1 Outlines MG-WDSO-2, dimensions in mm/inches

7 Package outlines

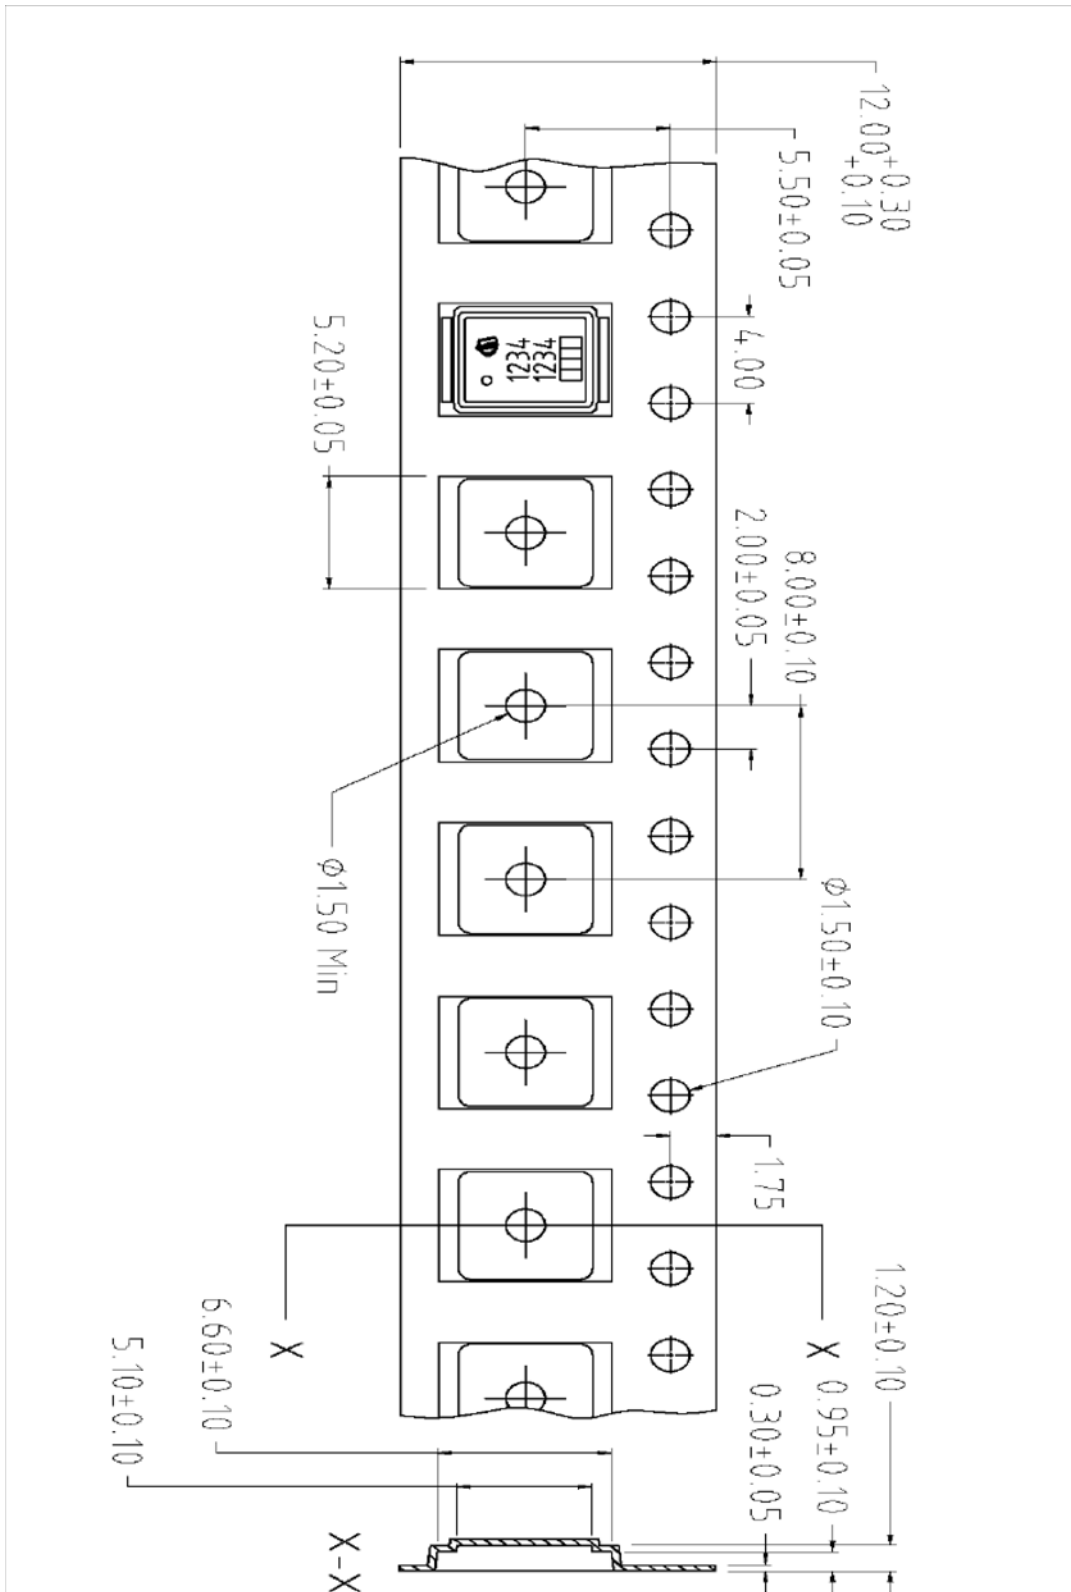


Figure 2 Outlines MG-WDSO-2, dimensions in mm/inches

8 Package outlines


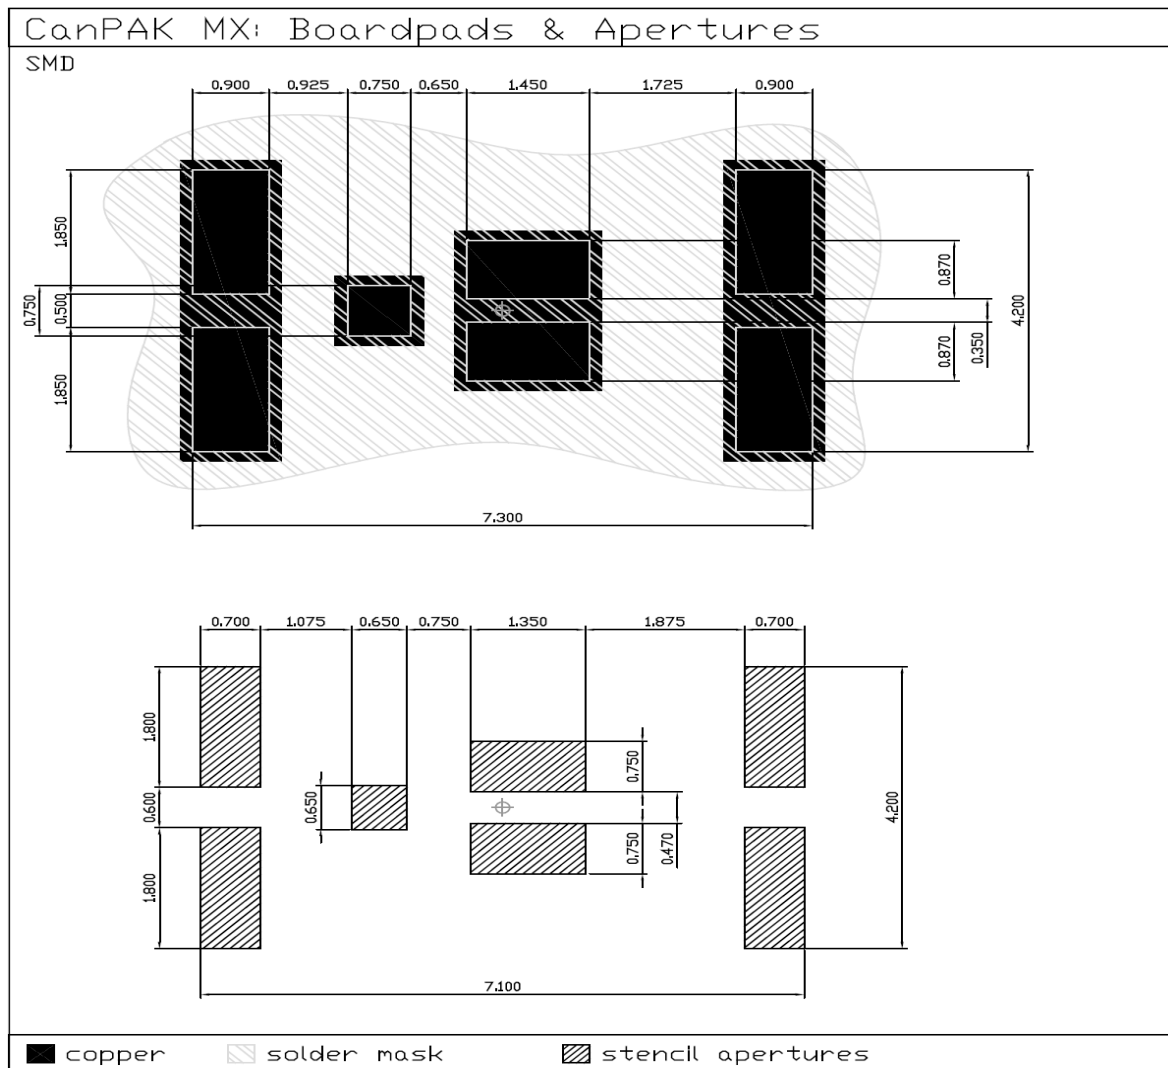


Figure 3 Outlines MG-WDSO-2, dimensions in mm/inches. Recommended stencil thickness 150µm

9 Marking Layout

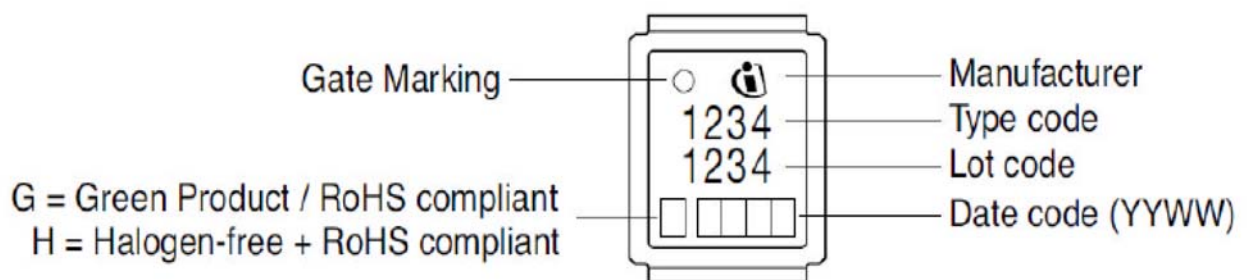

9 Revision History

Revision History: 2011-09-16, 2.3

Previous Revision:

Revision	Subjects (major changes since last revision)
0.1	Release of target data sheet
2.0	Release Final version
2.2	DirectFET Disclaimer expired
2.3	Update VGS(th)

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?

Your feedback will help us to continuously improve the quality of this document.

Please send your proposal (including a reference to this document) to: erratum@infineon.com



Edition 2011-09-16

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2011 Infineon Technologies AG

All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru