

Specification

Part No.	:	GW.48.A151
Product Name	:	Black 2.4 / 5.8GHz Dual Band 3-3.5dBi Rubber Duck Dipole Antenna with RP-SMA(M)
Features	:	2.4/5.8GHz Dual Band Operation UV Resistant, Robust TPEE Housing IP67 Waterproof Enclosure IK05 Impact Rated Enclosure 3.5 dBi Peak Gain @ 2.4GHz 3 dBi Peak Gain @ 5.8GHz Connector Mount: RP-SMA(M) Dimensions: 89.5mm x 7.5mm Diameter RoHS compliant



1. Introduction

The GW.48 dual-band 2.4/5.8GHz RP-SMA(M) mount dipole antenna is designed for superior performance and reliability. With an omnidirectional radiation pattern and excellent efficiency and gain on both 2.4 GHz and 5.8 GHz bands.

At just 89.5mm in height, the GW.48 is a great smaller form factor solution for Bluetooth and Wireless LAN networks. The IP67 rated enclosure makes it suitable for both indoor and outdoor applications. The flexible IK05 rated TPEE enclosure is impact resistant and durable and has the added benefit of UV resistance, allowing it to meet the needs of demanding outdoor applications.

The GW.48 has a 3.5 dBi Peak Gain at 2.4GHz and 3 dBi Peak Gain @ 5.8GHz making it a cost-effective, high-performing choice for any outdoor application operating at 2.4 or 5.8 GHz. Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when installed. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.


Contact your local Taoglas customer support team for further information.

2. Specification


ELECTRICAL			
Frequency		2.4 ~ 2.5GHz	5.15 ~ 5.85GHz
Return Loss (dB)		<-10	<-7
Peak Gain (dBi)	Free Space	3.42	4.56
	Ground Plane	2.52	2.85
Average Gain (dBi)	Free Space	-1.20	-1.73
	Ground Plane	-1.56	-2.62
Efficiency (%)	Free Space	75.82	67.21
	Ground Plane	69.77	54.65
Polarization		Linear	
Impedance		50 Ω	
Radiation Pattern		Omni	
Input Power		2W max.	
MECHANICAL			
Antenna Length		89.5 mm	
Antenna Diameter		7.5 mm	
Weight		9.5g	
Antenna Body Material		TPEE	
Connector		RP-SMA(M)	
Waterproof		IP67	
Pendulum Hammer Test [IEC62262]		IK05	
ENVIRONMENTAL			
Temperature Range		-40°C to 85°C	
Humidity		Non-condensing 65°C 95% RH	

3. Antenna Measurement Setup & Return Loss

3.1 Test Setup

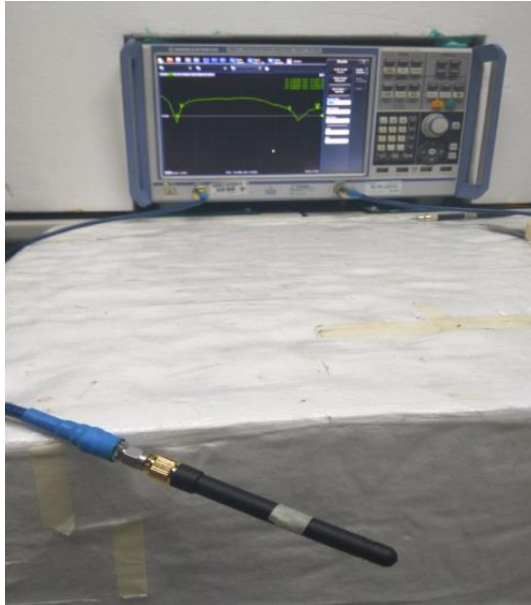


Free Space

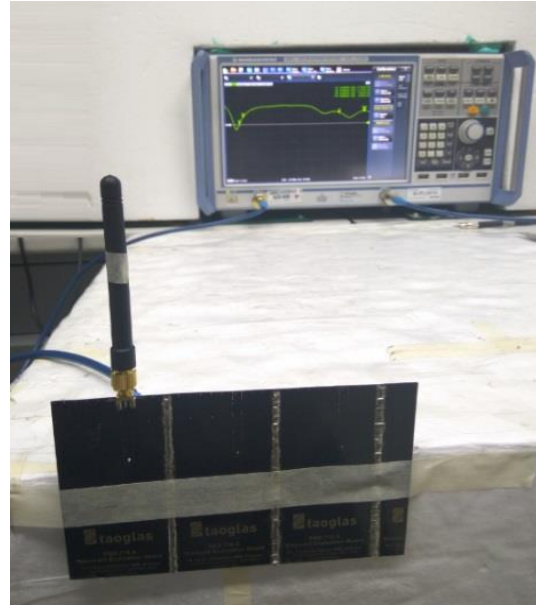


With Ground Plane


3.2 Return Loss

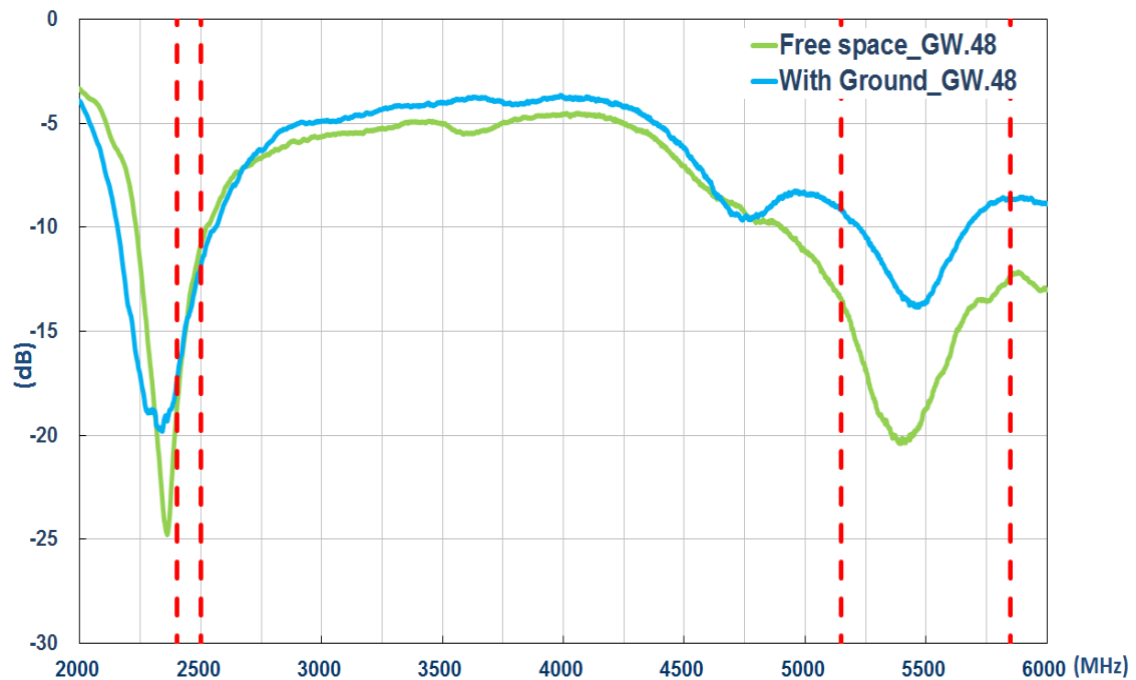


3.2. Efficiency

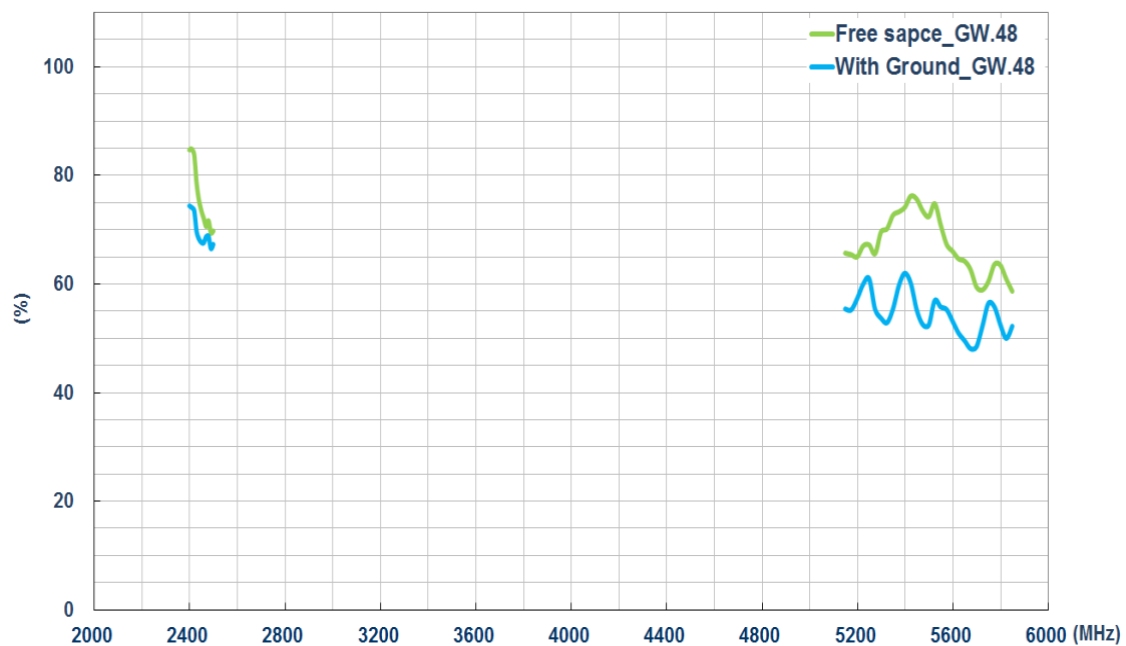

3.3 Average Gain

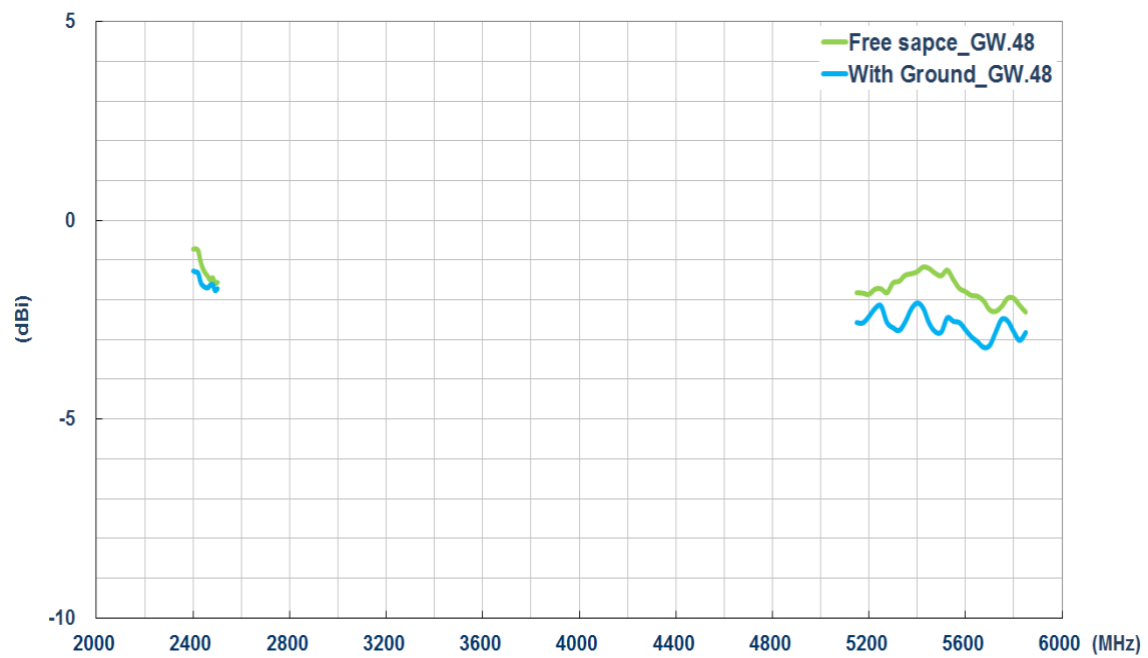

3.4 Peak Gain

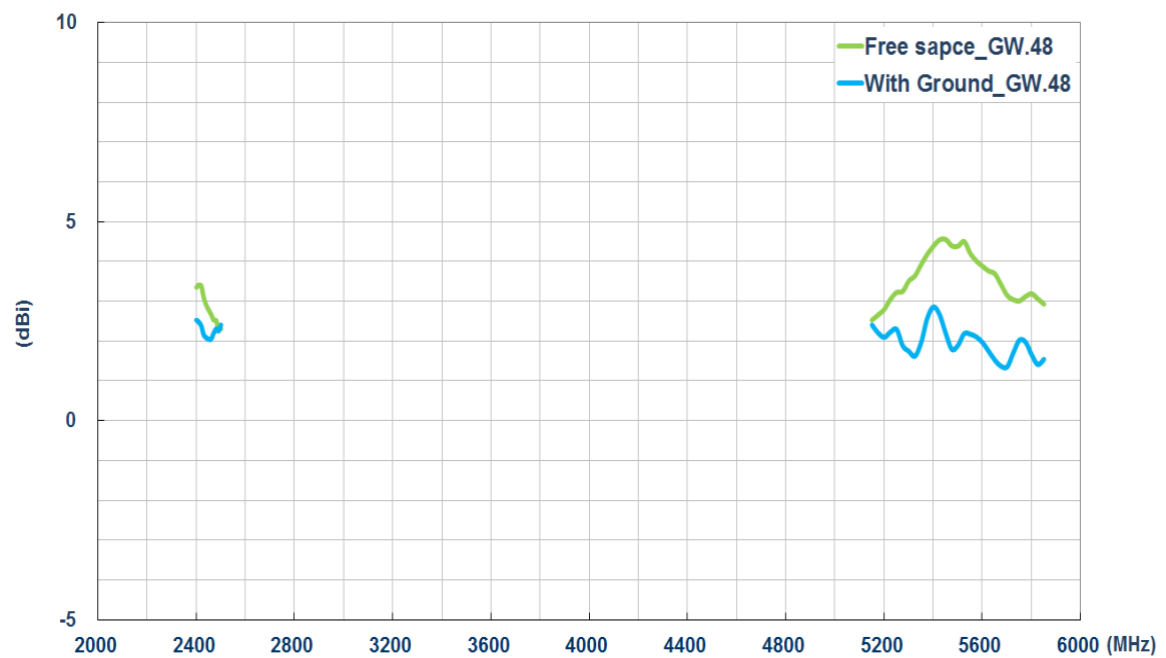


4. Antenna Radiation Patterns

4.1 Antenna Setup (Antenna Test Setup in Anechoic Chamber)



Free Space


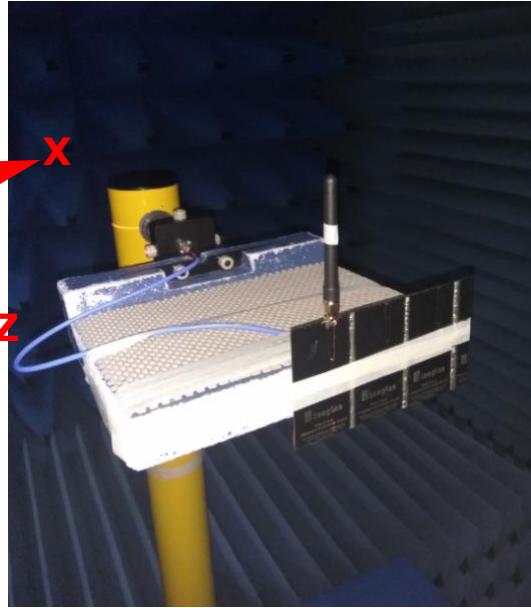


With Ground

4.2 2D Radiation Patterns


4.2.1 Wi-Fi Dual Band - Free Space

XY Plane

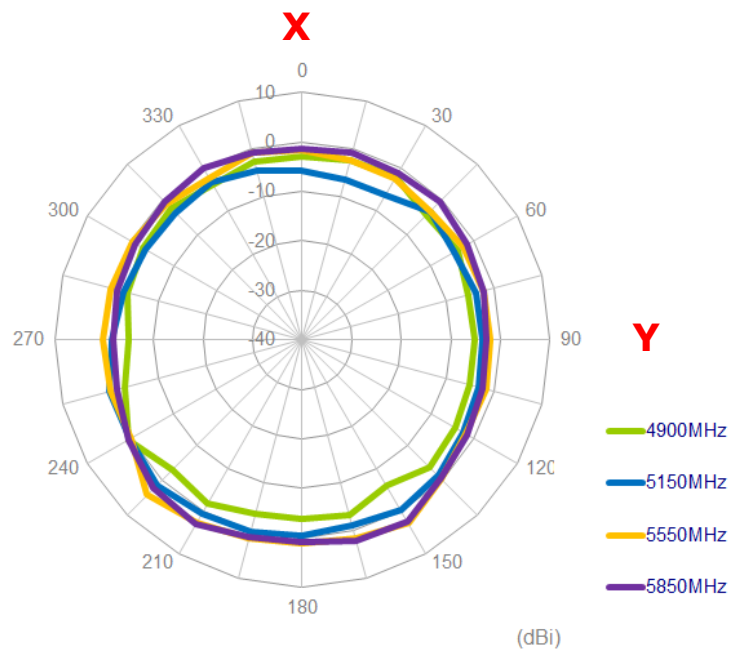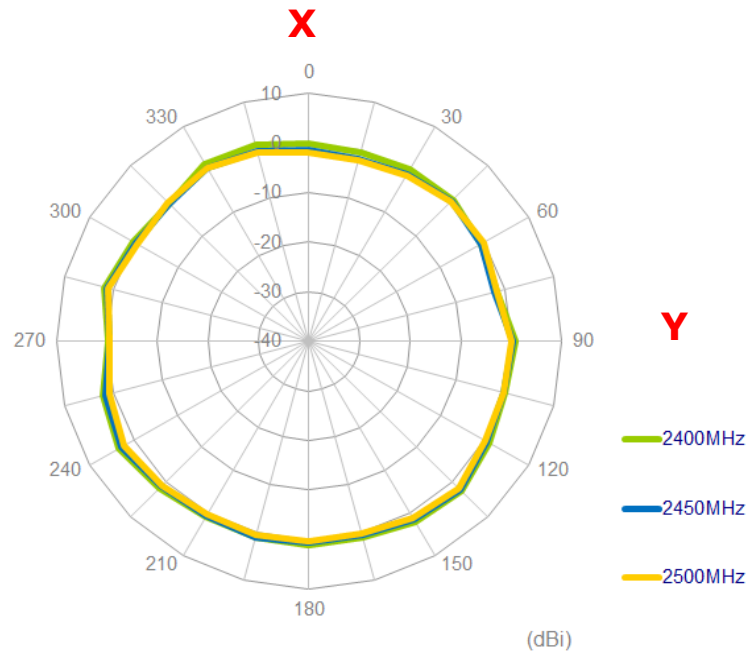


XZ Plane



Z

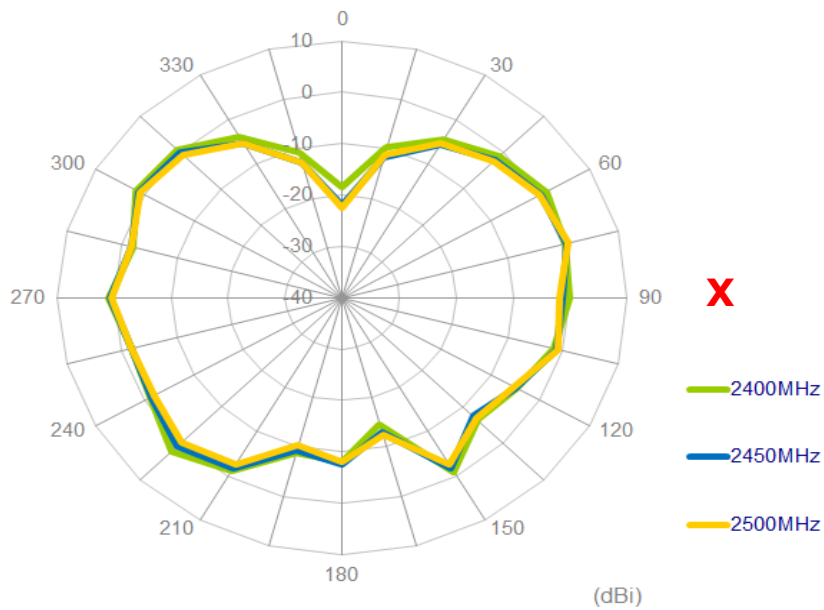

Z


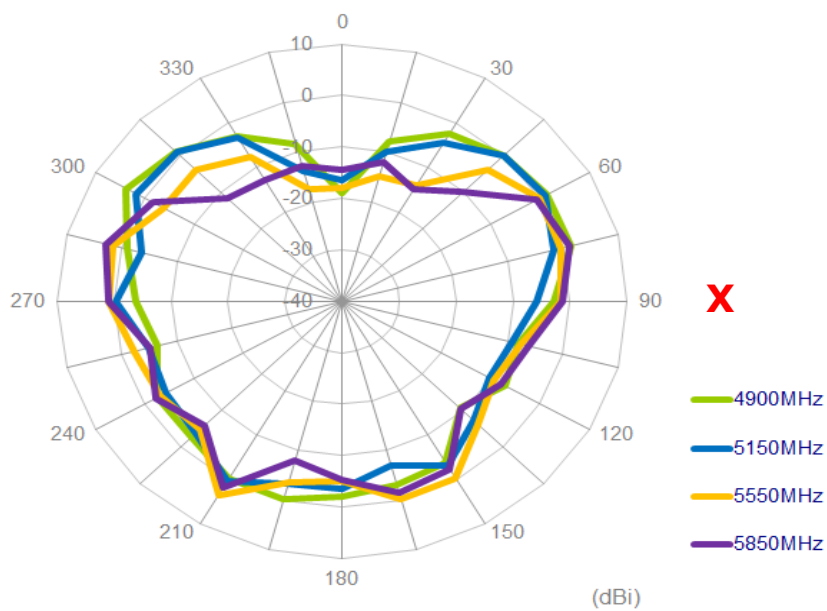


YZ Plane

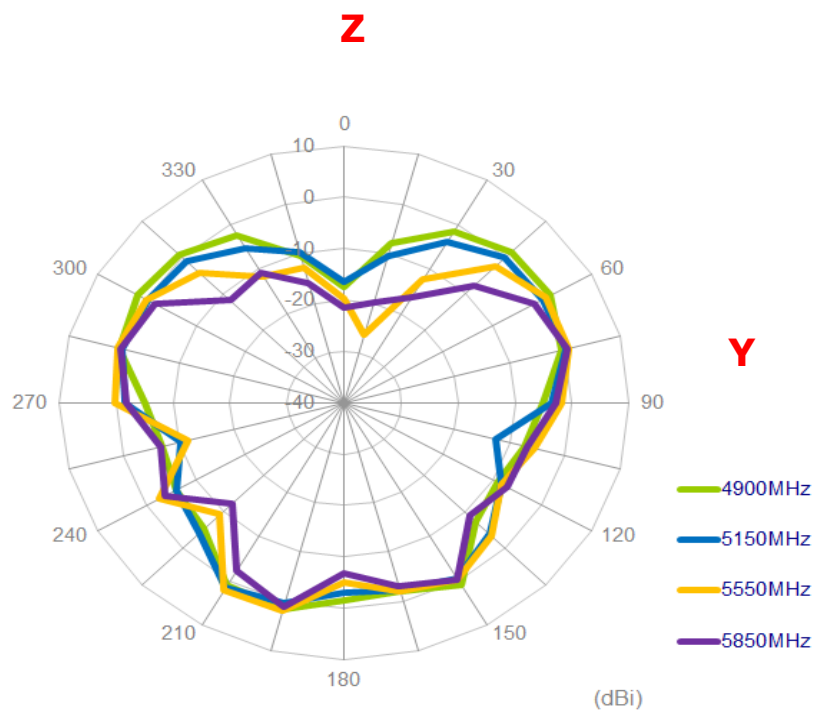
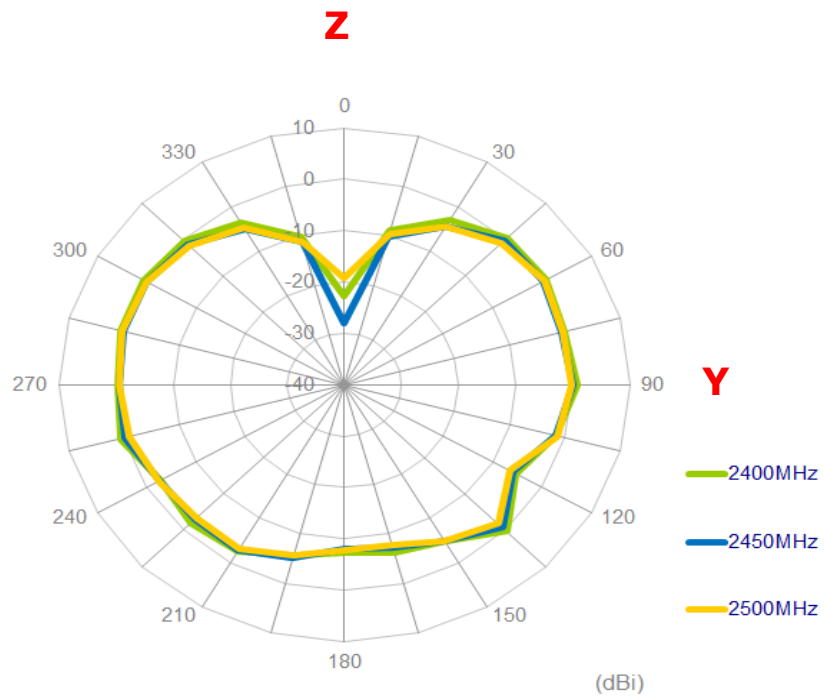


4.2.2 Wi-Fi Dual Band (With Ground)



XY Plane

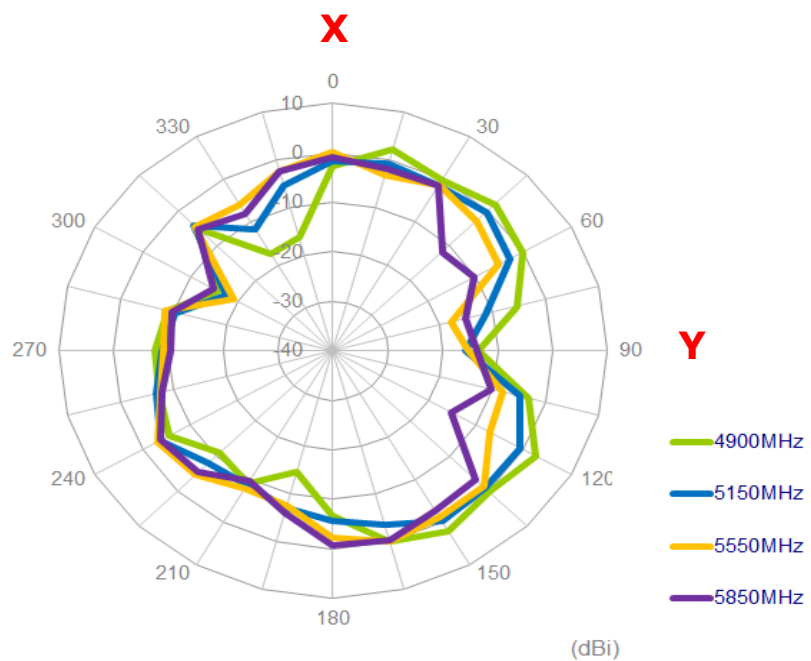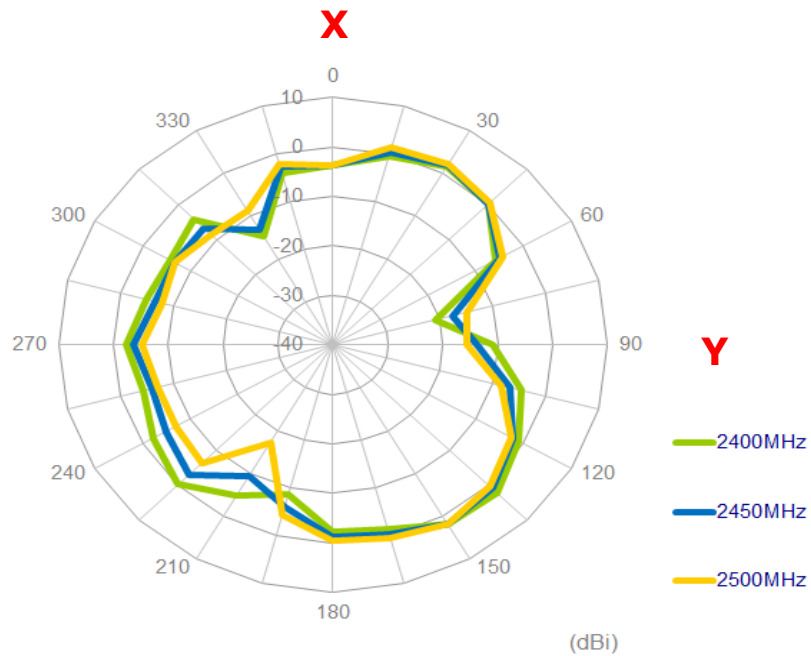



XZ Plane

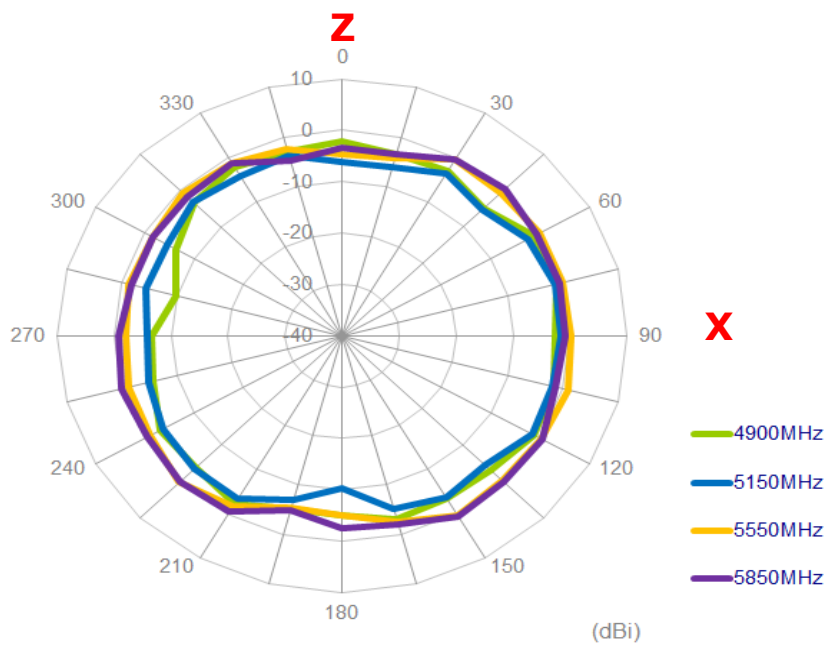
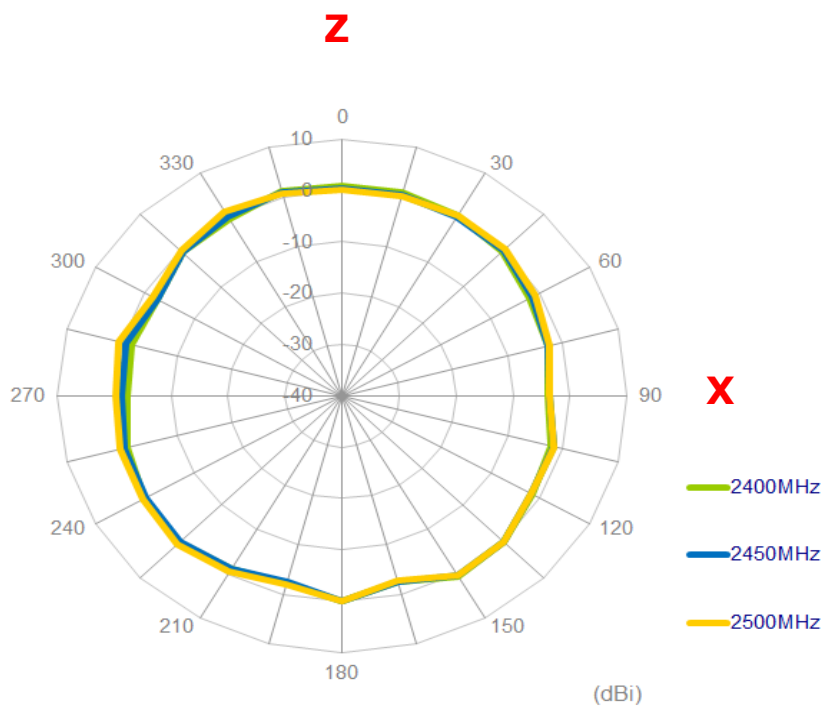


YZ Plane

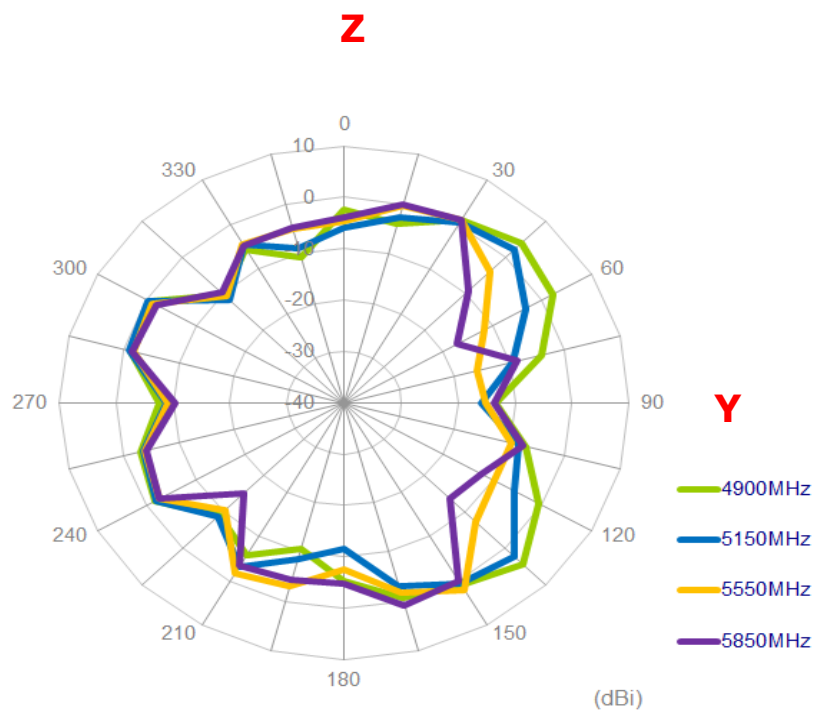
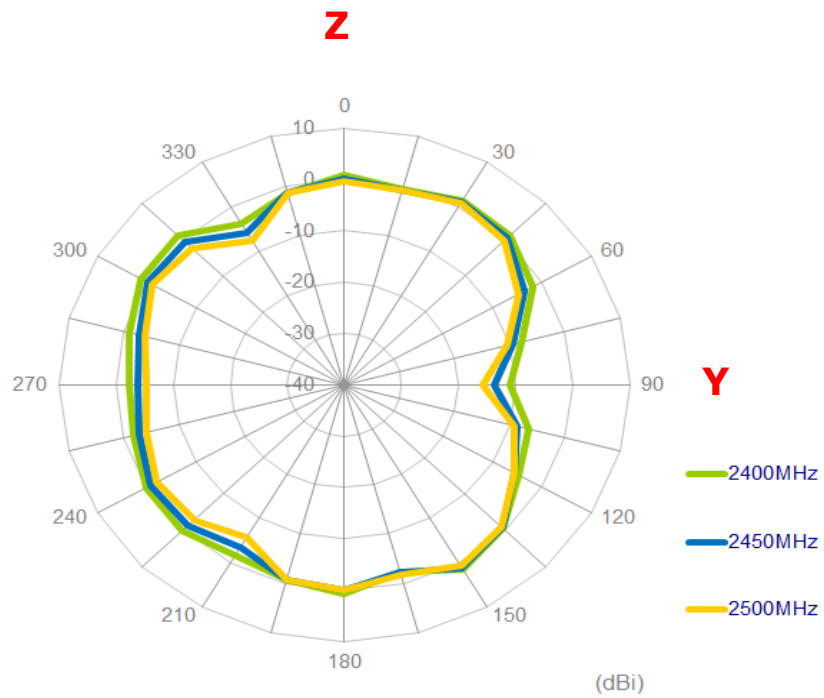




4.2.3 3D Radiation Pattern - Free space

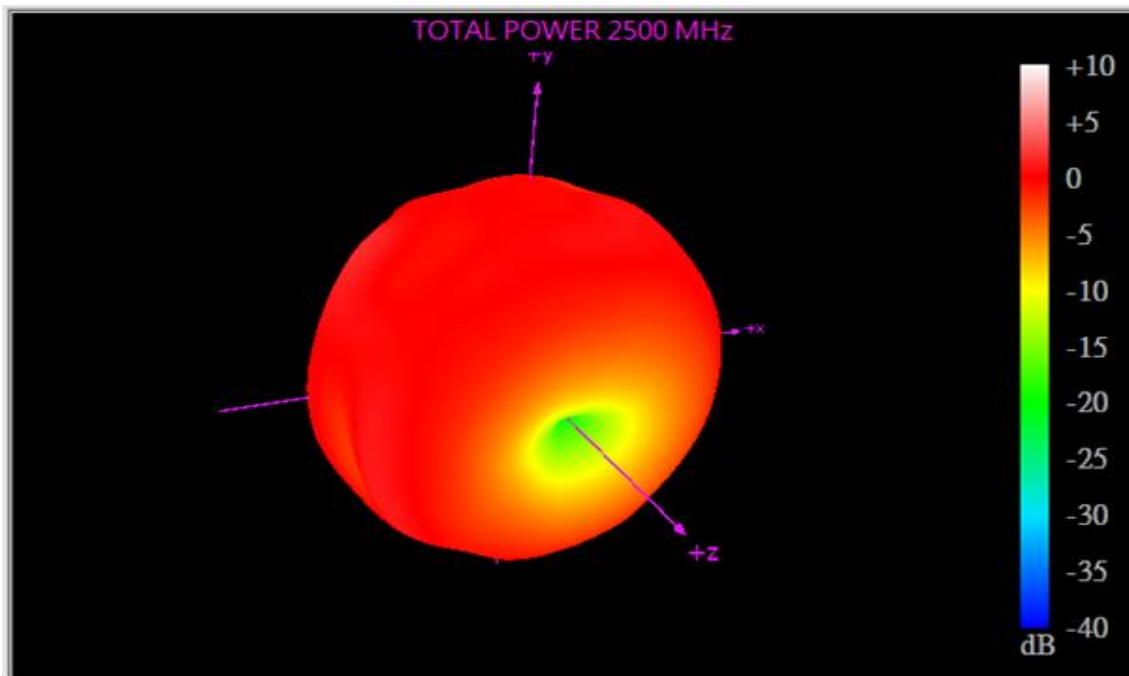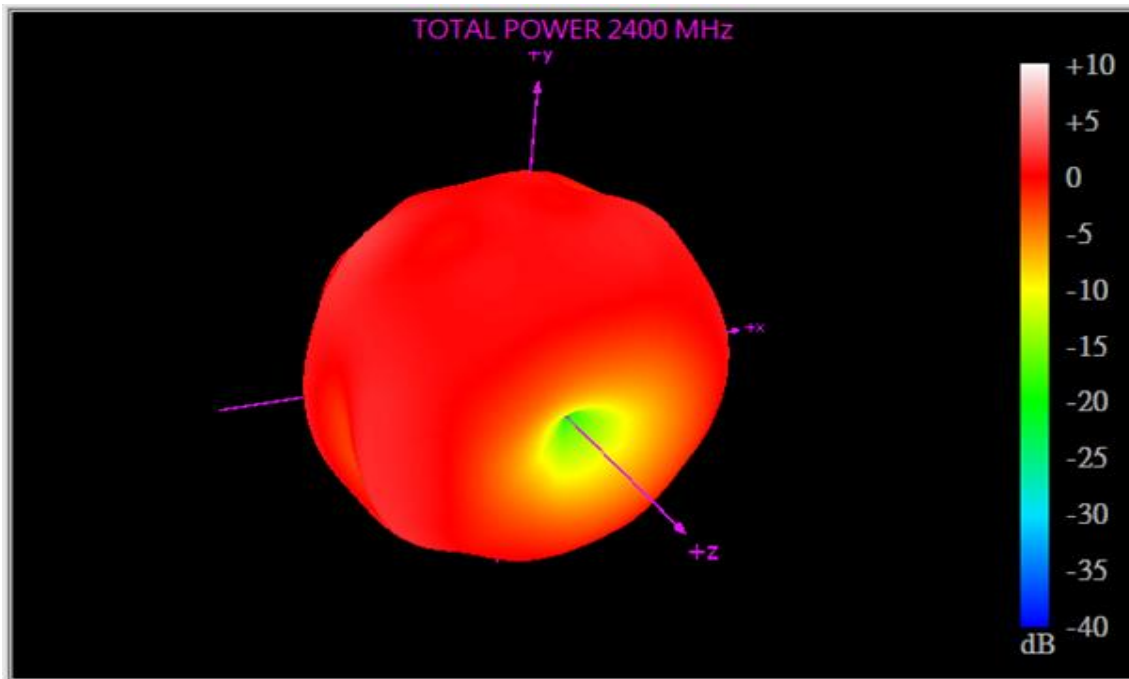

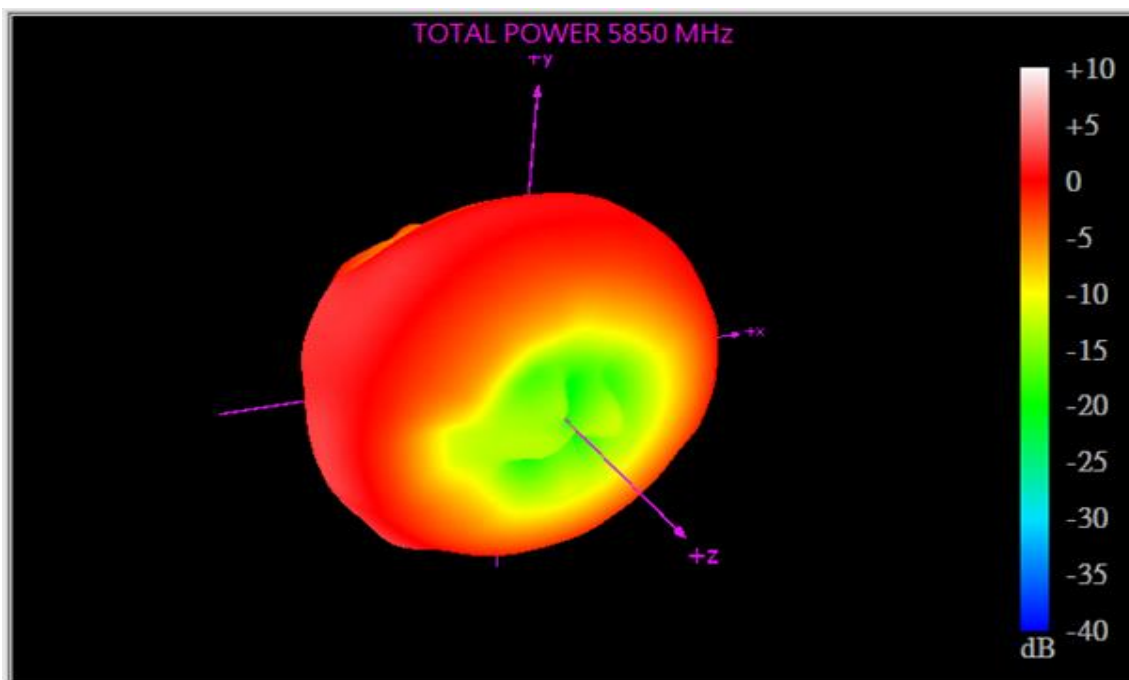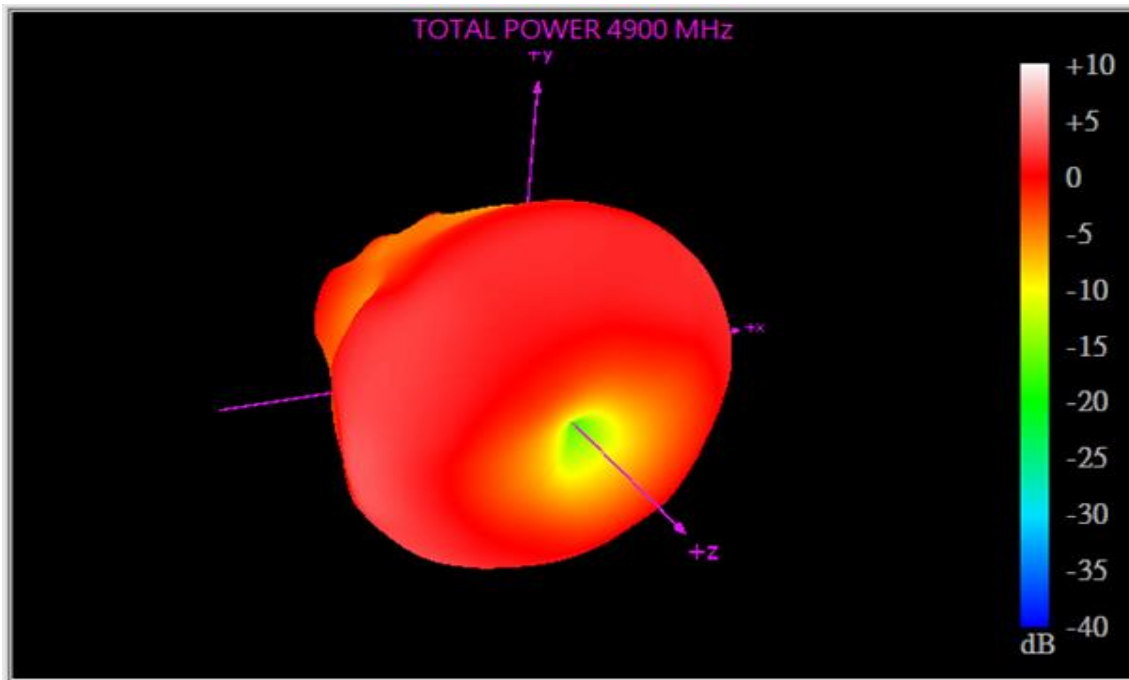


4.2.4 3D Radiation Pattern – with Ground

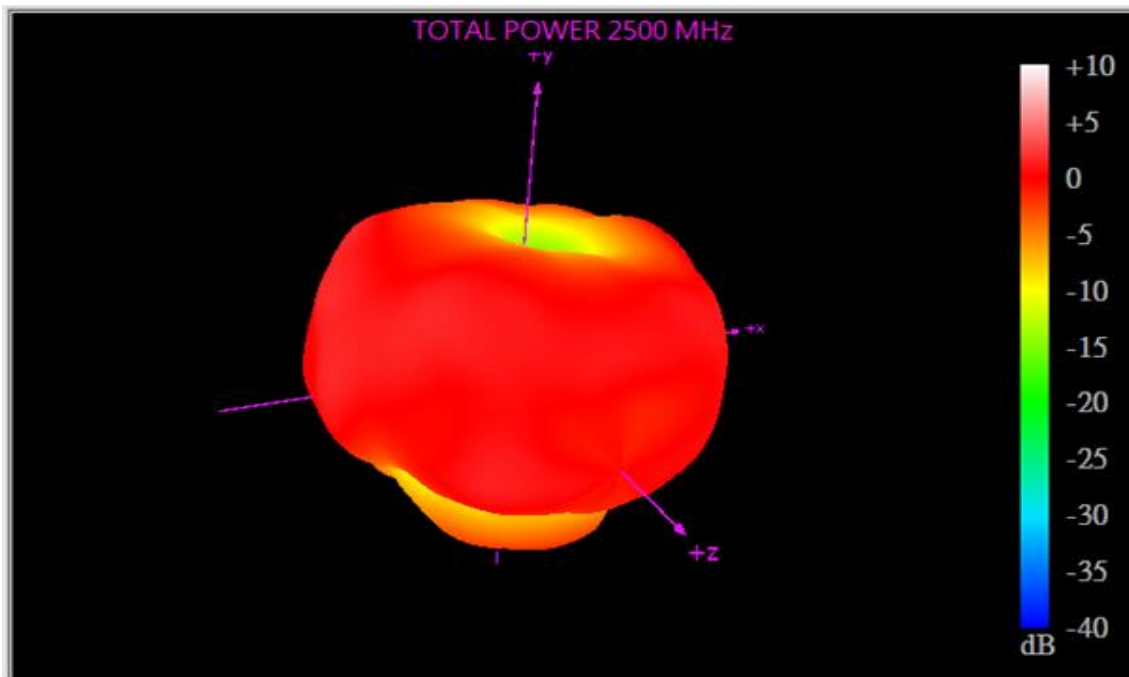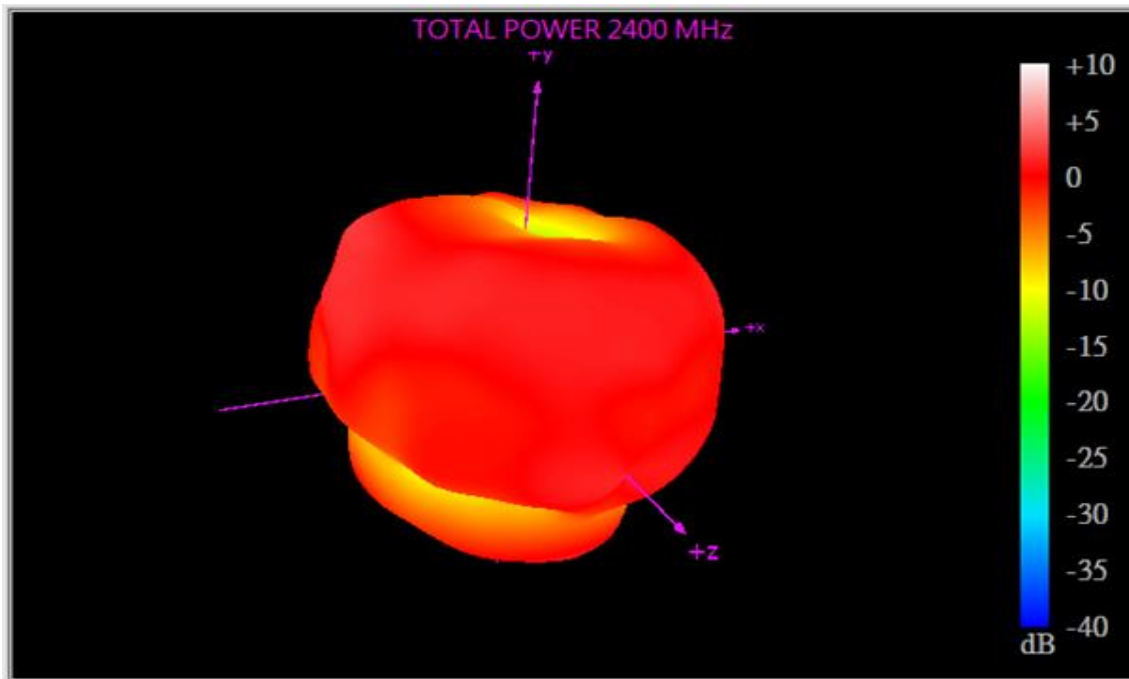

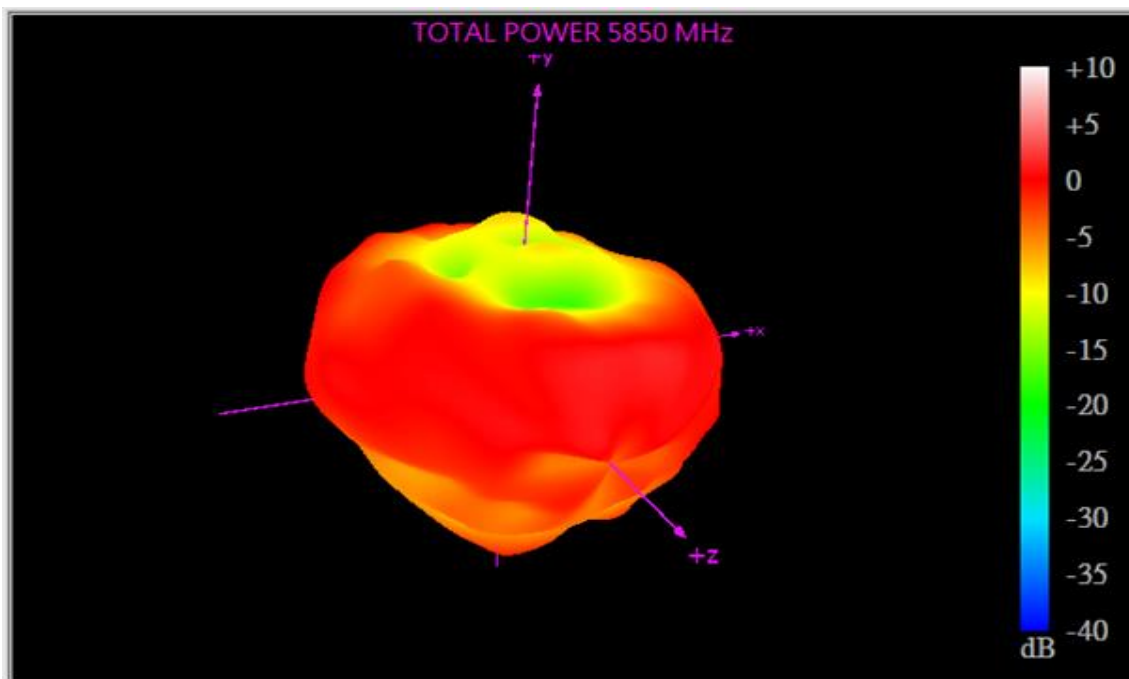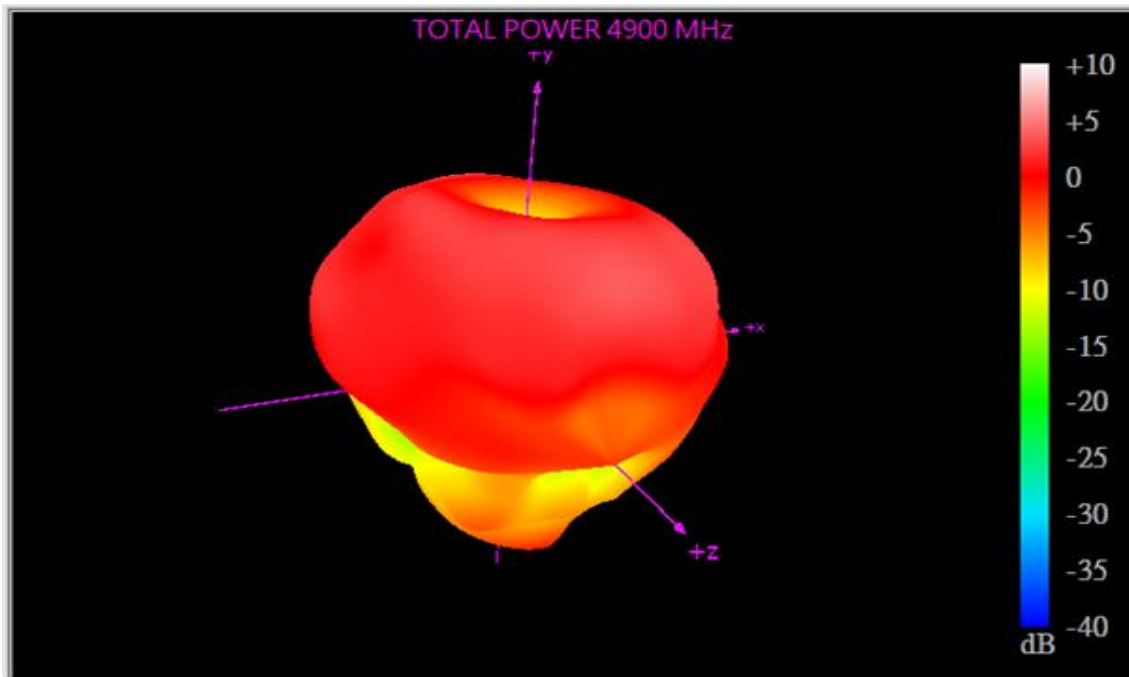


5. Mechanical Drawing (Unit: mm)

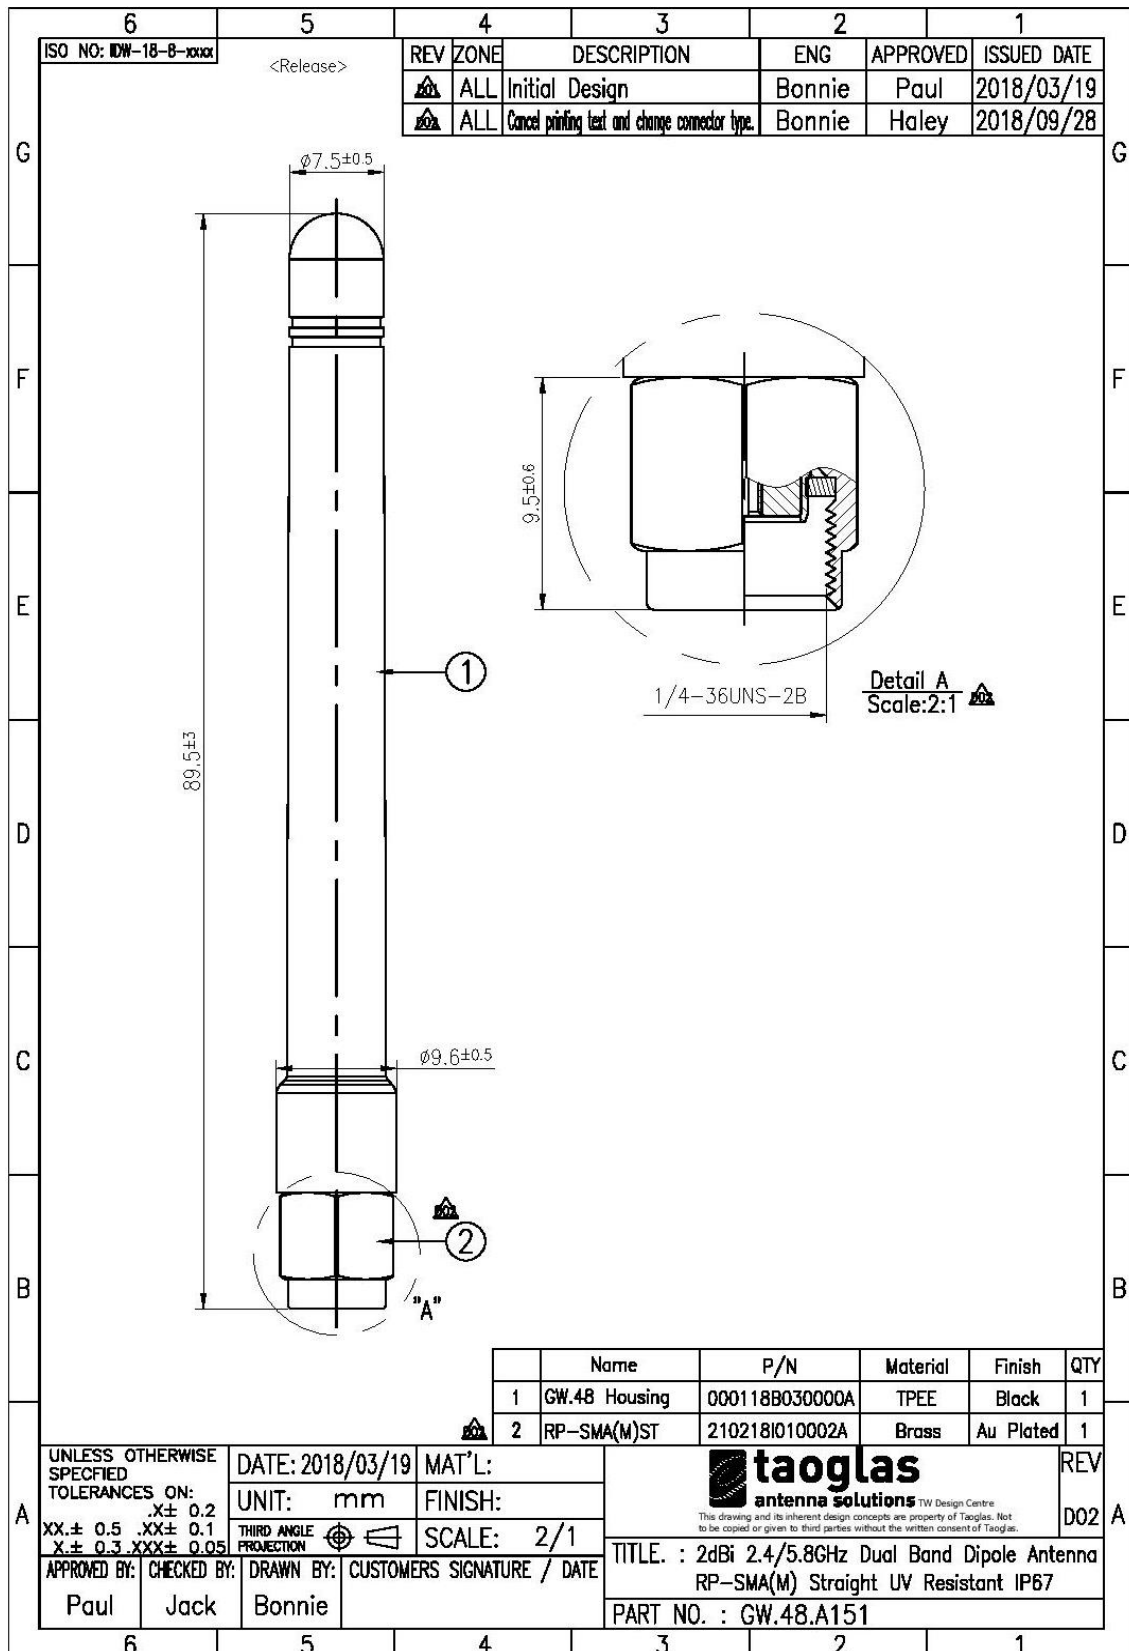


6. Packaging


10 pcs GW.48 per PE Bag
 Bag Dimensions - 100 x 200 mm
 Weight - 86g

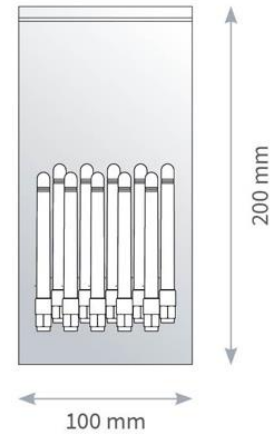

10 Small PE Bag per Large Bag
 100 pcs GW.48 per PE Large Bag
 Bag Dimensions - 300 x 180mm
 Weight - 865g

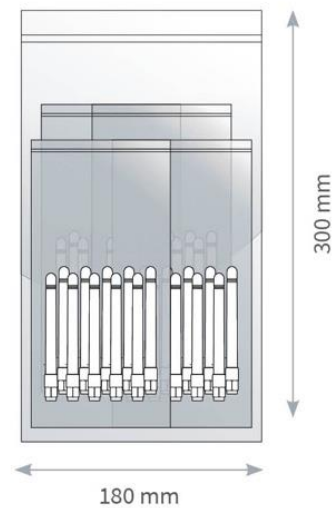

1000 pcs GW.48 per carton
 Carton - 360 x 310 x 160mm
 Weight - 9.6Kg

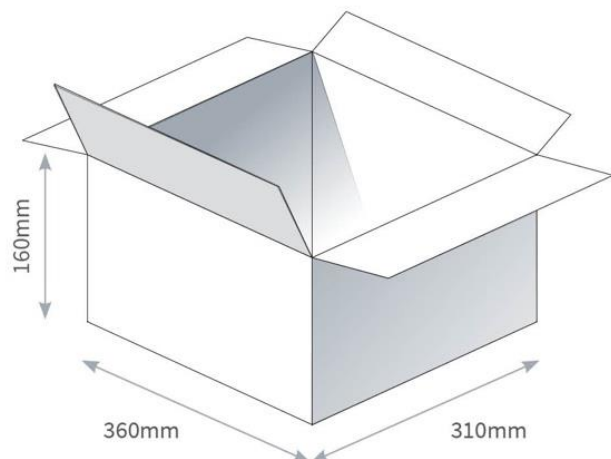

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru