


## REVISIONS

| P | LTR | DESCRIPTION           | DATE   | DWN | APVD |
|---|-----|-----------------------|--------|-----|------|
|   | C   | REV PER ECO 17-004696 | 5-8-17 | CT  | EH   |

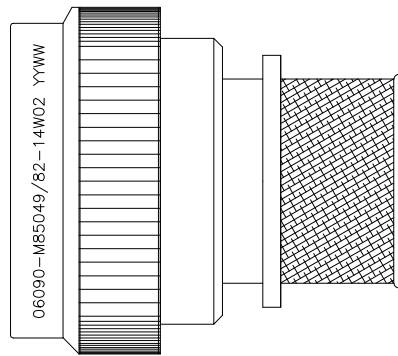

SELF-LOCKING  
SHIELD BAND TERMINATION  
SHRINK BOOT ACCOMMODATION ADAPTER

1. THIS PRODUCT IS DESIGNED TO TERMINATE A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR, AND DESIGNED TO MEET PERFORMANCE REQUIREMENTS OF AS85049/82.
2. ALL COMPONENTS SHALL BE PACKAGED AND SUPPLIED IN A PLASTIC BAG AND LABELED WITH M85049/82 DESIGNATION. e.g. M85049/82-14W02.
3. PART SUPPLIED WITH STANDARD DETENTED SELF-LOCKING WHICH PROVIDES A POSITIVE AUDIBLE DETENTED COUPLING.
4. THIS ADAPTER MATES TO CONNECTOR SAE-AS50151 CRIMP, MIL-DTL-26482 SERIES 2, SAE-AS81703 SERIES 3, AND MIL-DTL-83723 SERIES III.
5. FOR MATERIALS AND PLATING FINISHES INFORMATION REFER TO R85049.  
FOR ALTERNATIVE MATERIALS AND PLATING FINISHES CONTACT TE CONNECTIVITY.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.


THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT - TE Connectivity

|                                                                                                                                   |                       |                                                                                        |                                                                                                      |                           |                    |                 |          |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------|--------------------|-----------------|----------|
| DIMENSIONS:<br>INCHES                                                                                                             | DWN<br>C.C.THOMAS     | 08MAY2017                                                                              | MATERIAL<br>—                                                                                        | FINISH<br>—               |                    |                 |          |
|                                                                                                                                   | CHK<br>E.HALEY        | 5-8-17                                                                                 |  TE Connectivity |                           |                    |                 |          |
| TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:<br><br>0 PLC ± —<br>1 PLC ± —<br>2 PLC ± .01<br>3 PLC ± .005<br>4 PLC ± —<br>ANGLES ± — | APVD<br>E.HALEY       | 5-8-17                                                                                 |                                                                                                      |                           |                    |                 |          |
|                                                                                                                                   | PRODUCT SPEC<br>—     | NAME<br>BACKSHELL,STRAIGHT,SHIELD BAND TERMINATION<br>SHRINK BOOT ACCOMMODATION,CAT 3B |                                                                                                      |                           |                    |                 |          |
|                                                                                                                                   | APPLICATION SPEC<br>— | SIZE<br>A4                                                                             | CAGE CODE<br>06090                                                                                   | DRAWING NO<br>C-R85049/82 | RESTRICTED TO<br>— |                 |          |
| WEIGHT<br>0                                                                                                                       |                       | CUSTOMER DRAWING                                                                       |                                                                                                      |                           | SCALE<br>NTS       | SHEET<br>1 OF 3 | REV<br>C |

## REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|-------------|------|-----|------|
| — | —   | SEE SHEET 1 | —    | —   | —    |

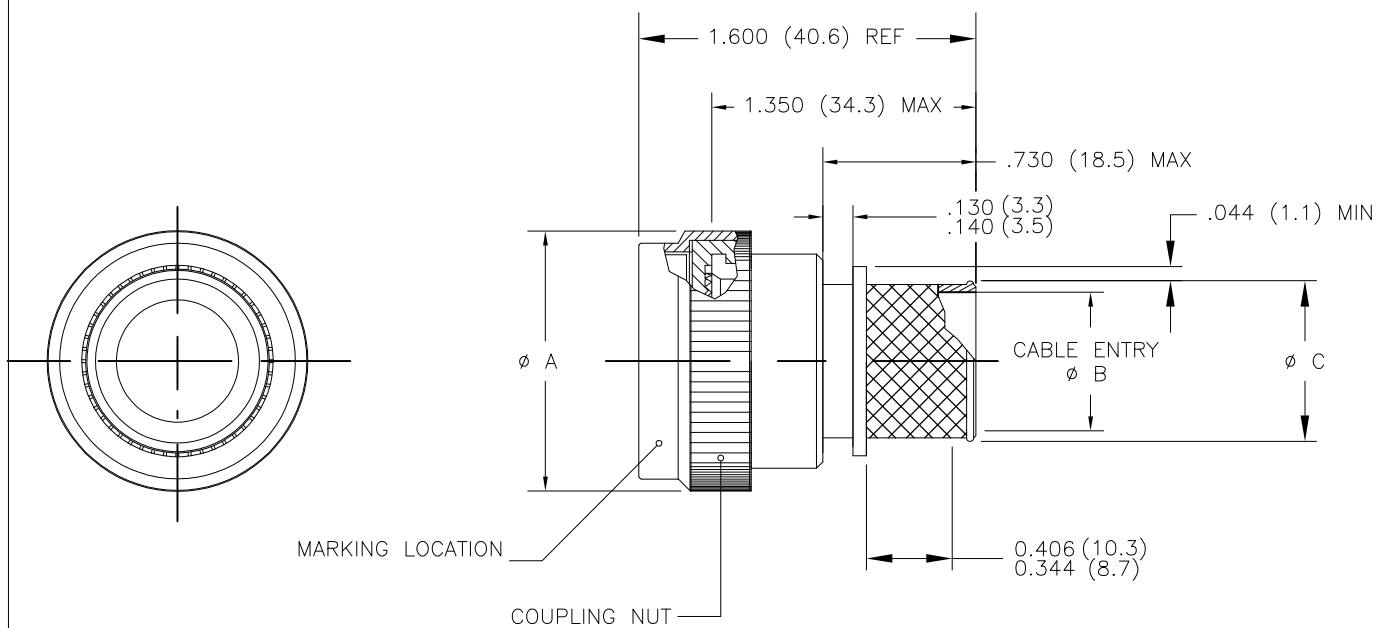

## PART NUMBERING

M85049/82 - 14 W 02

- SPECIFICATION SHEET
- CONFIGURATION:
  - (DASH) DETENTED SELF-LOCKING
- ORDER NO.
- FINISH
- ENTRY SIZE


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT - TE Connectivity

|                                           |                       |                    |                                                         |                           |
|-------------------------------------------|-----------------------|--------------------|---------------------------------------------------------|---------------------------|
| DIMENSIONS:<br>INCHES                     | DWN<br>C.C.THOMAS     | 08MAY2017          | MATERIAL<br>—                                           | FINISH<br>—               |
|                                           | CHK<br>E.HALEY        | 5-8-17             | <b>TE</b> TE Connectivity                               |                           |
| TOLERANCES UNLESS<br>OTHERWISE SPECIFIED: | APVD<br>E.HALEY       | 5-8-17             |                                                         |                           |
|                                           | 0 PLC ± —             | PRODUCT SPEC<br>—  | NAME<br>BACKSHELL, STRAIGHT,<br>SHIELD BAND TERMINATION |                           |
| 1 PLC ± —                                 | APPLICATION SPEC<br>— | SIZE<br>A4         | CAGE CODE<br>00779                                      | DRAWING NO<br>C-R85049/82 |
| 2 PLC ± .01                               | WEIGHT<br>—           | RESTRICTED TO<br>— |                                                         |                           |
| 3 PLC ± .005                              | CUSTOMER DRAWING      | SCALE<br>NTS       | SHEET<br>2 OF 3                                         | REV<br>C                  |
| 4 PLC ± —                                 |                       |                    |                                                         |                           |
| ANGLES ± —                                |                       |                    |                                                         |                           |



| REVISIONS |     |             |      |     |      |
|-----------|-----|-------------|------|-----|------|
| P         | LTR | DESCRIPTION | DATE | DWN | APVD |
|           | —   | SEE SHEET 1 | —    | —   | —    |


| ORDER NUMBER | FOR CONNECTOR SHELL SIZE (REF) |                               |                          |                                 | TABLE I — SHELL SIZE AND DIMENSIONS |                        |               |               |               |
|--------------|--------------------------------|-------------------------------|--------------------------|---------------------------------|-------------------------------------|------------------------|---------------|---------------|---------------|
|              | SAE—<br>AS81703<br>SERIES 3    | MIL—DTL—<br>26482<br>SERIES 2 | SAE—<br>AS50151<br>CRIMP | MIL—DTL—<br>83723<br>SERIES III | A MAX DIA                           | B DIA ±.010 ENTRY SIZE |               | C DIA REF     |               |
|              |                                |                               |                          |                                 |                                     | 02                     | 03            | 02            | 03            |
| 8            | --                             | 8                             | 8S                       | 8                               | .885 (22.48)                        | N/A                    | .250 (6.35)   | N/A           | .395 (10.03)  |
| 10           | --                             | 10                            | 10S, 10SL                | 10                              | 1.010 (25.65)                       | N/A                    | .312 (7.92)   | N/A           | .457 (11.61)  |
| 12           | 7                              | 12                            | 12S AND 12               | 12                              | 1.135 (28.83)                       | .312 (7.92)            | .438 (11.13)  | .457 (11.60)  | .583 (14.81)  |
| 14           | 12                             | 14                            | 14S AND 14               | 14                              | 1.260 (32.00)                       | .438 (11.13)           | .562 (14.27)  | .583 (14.81)  | .707 (17.96)  |
| 16           | 19                             | 16                            | 16S AND 16               | 16                              | 1.385 (35.18)                       | .500 (12.70)           | .625 (15.88)  | .645 (16.38)  | .770 (19.56)  |
| 18           | 27                             | 18                            | 18                       | 18                              | 1.510 (38.35)                       | .625 (15.88)           | .750 (19.05)  | .770 (19.56)  | .895 (22.73)  |
| 20           | 37                             | 20                            | 20                       | 20                              | 1.635 (41.53)                       | .625 (15.88)           | .812 (20.62)  | .770 (19.56)  | .957 (24.31)  |
| 22           | --                             | 22                            | 22                       | 22                              | 1.760 (44.70)                       | .688 (17.48)           | .938 (23.83)  | .829 (21.06)  | 1.083 (27.51) |
| 24           | --                             | 24                            | 24                       | 24                              | 1.885 (47.88)                       | .750 (19.05)           | 1.000 (25.40) | .895 (22.73)  | 1.145 (29.08) |
| 28           | --                             | --                            | 28                       | --                              | 2.135 (54.23)                       | .875 (22.23)           | 1.125 (28.58) | 1.020 (25.91) | 1.270 (32.26) |

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT — TE Connectivity

|                                                                                                                                |                       |                                                        |                                                                                                      |                           |
|--------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------|
| DIMENSIONS:<br>INCHES                                                                                                          | DWN<br>C.C.THOMAS     | 08MAY2017                                              | MATERIAL<br>—                                                                                        | FINISH<br>—               |
|                                                                                                                                | CHK<br>E.HALEY        | 5-8-17                                                 |  TE Connectivity |                           |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:<br><br>0 PLC ± —<br>1 PLC ± —<br>2 PLC ± .01<br>3 PLC ± .005<br>4 PLC ± —<br>ANGLES ± — | APVD<br>E.HALEY       | 5-8-17                                                 |                                                                                                      |                           |
|                                                                                                                                | PRODUCT SPEC<br>—     | NAME<br>BACKSHELL,STRAIGHT,<br>SHIELD BAND TERMINATION |                                                                                                      |                           |
|                                                                                                                                | APPLICATION SPEC<br>— | SIZE<br>A4                                             | CAGE CODE<br>00779                                                                                   | DRAWING NO<br>C-R85049/82 |
|                                                                                                                                | WEIGHT<br>—           | RESTRICTED TO<br>—                                     |                                                                                                      |                           |
|                                             | CUSTOMER DRAWING      |                                                        | SCALE<br>NTS                                                                                         | SHEET<br>3 OF 3           |
|                                                                                                                                |                       |                                                        |                                                                                                      | REV<br>C                  |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)