

HIGH GRAPHICS PERFORMANCE WITH LOW POWER CONSUMPTION

conga-QAF




- Based on AMD Embedded G-Series Processors
- Best price/performance ratio
- High performance graphics



Formfactor	Qseven Form Factor, 70 x 70 mm												
CPU	<p>AMD Embedded G-Series Processors</p> <table border="0"> <tr> <td>AMD G-T40E</td> <td>1.0 GHz Dual Core</td> <td>L2 cache 512KB x2</td> <td>6.4W TDP</td> </tr> <tr> <td>AMD G-T40R</td> <td>1.0 GHz Single Core</td> <td>L2 cache 512KB</td> <td>5.5W TDP</td> </tr> <tr> <td>AMD G-T16R</td> <td>615 MHz Single Core</td> <td>L2 cache 512KB</td> <td>4.5W TDP</td> </tr> </table>	AMD G-T40E	1.0 GHz Dual Core	L2 cache 512KB x2	6.4W TDP	AMD G-T40R	1.0 GHz Single Core	L2 cache 512KB	5.5W TDP	AMD G-T16R	615 MHz Single Core	L2 cache 512KB	4.5W TDP
AMD G-T40E	1.0 GHz Dual Core	L2 cache 512KB x2	6.4W TDP										
AMD G-T40R	1.0 GHz Single Core	L2 cache 512KB	5.5W TDP										
AMD G-T16R	615 MHz Single Core	L2 cache 512KB	4.5W TDP										
DRAM	2 GByte DDR3L-1066 onboard memory, optional 4 GByte												
Chipset	AMD A55E Controller Hub												
Ethernet	Gigabit Ethernet and Intel® 82574												
I/O Interfaces	4x PCI Express x1 lanes, 2x Serial ATA®, 8x USB 2.0, 1x SDIO to 8bit SD/MMC, 2x ExpressCard™, LPC Bus, I2C Bus												
Mass Storage	Onboard SATA Solid State Drive up to 32 GByte (optional)												
Sound	High Definition Audio Interface												
Graphics	Integrated AMD Radeon™ HD 6250, DirectX®11 graphics with UVD 3.0, Dual Simultaneous Display Support												
LVDS	18bit, 24bit, Dual 24bit, up to 1920x1200@60Hz;; Automatic Panel Detection via EDID/EPI												
Digital Display	DisplayPort 1.1a or HDMI 1.3 port, resolutions up to 1920x1200@60Hz												
congatec Board controller	Multi Stage Watchdog, non-volatile User Data Storage, Manufacturing and Board Information, Board Statistics, BIOS Setup Data, Backup, I2C bus (fast mode, 400 kHz, multi-master), Power Loss Control												
Embedded BIOS Features	AMI-Aptio 4MByte Flash BIOS with congatec Embedded BIOS features												
Power Management	ACPI 3.0 with battery support												
Operating Systems	Microsoft® Windows7, Microsoft® Windows XP, Microsoft® Windows® embedded Standard, Linux 2.6												
Power Consumption	Typ. application: tbd., see manual for full details, CMOS Battery Backup												
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C												
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.												
Size	70 x 70 mm (2.76" x 2.76")												

conga-QAF | Block diagram

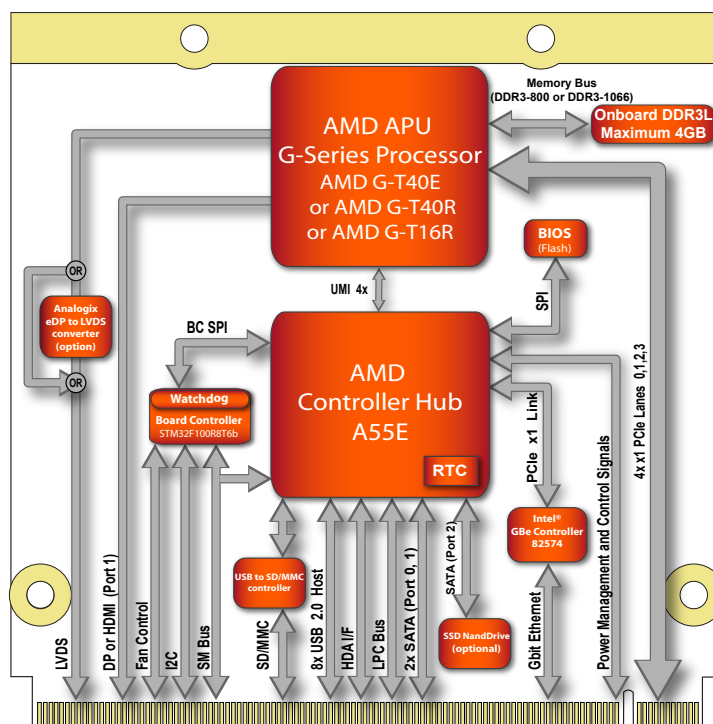

conga-QAF | Order Information

Article	PN	Description
conga-QAF/T40R-2G	15300	Qseven module with low power AMD G-Series Single Core 1.0GHz Processor T40R with 512kB L2 cache and 2GB DDR3 onboard memory.
conga-QAF/T40E-2G	15301	Qseven module with low power AMD G-Series dual core 1.0GHz processor T40E with 512kB L2 cache and 2GB DDR3 onboard memory.
conga-QAF/T40E-2G SSD4	15303	Qseven module with low power AMD G-Series dual core 1.0GHz processor T40E with 512kB L2 cache, 2GB DDR3 onboard memory and 4GB onboard MLC SATA Solid State Disk.
conga-QAF/T40R-2G SSD8	15304	Qseven module with low power AMD G-Series single core 1.0GHz processor T40R with 512kB L2 cache, 2GB DDR3 onboard memory and 8GB onboard MLC SATA Solid State Disk.
conga-QAF/T16R-2G SSD4	15305	Qseven module with low power AMD G-Series single core 615MHz processor T16R with 512kB L2 cache, 2GB DDR3 onboard memory and 4GB onboard MLC SATA Solid State Disk.
conga-QAF/T40E-4G	15306	Qseven module with low power AMD G-Series dual core 1.0GHz processor T40E with 512kB L2 cache and 4GB DDR3 onboard memory.
conga-QAF/T16R-1G	15307	Qseven module with low power AMD G-Series single core 615MHz processor T16R with 512kB L2 cache and 1GB DDR3 onboard memory.
QAF/HSP-B	15330	Standard heatspreader for Qseven module conga-QAF. All standoffs are with 2.7mm bore hole.
QAF/HSP-T	15331	Standard heatspreader for Qseven module conga-QAF. All standoffs are M2.5mm thread.
QAF/CSP-B 6mm	15332	Passive cooling solution with 6mm fin height for Qseven module conga-QAF. All standoffs are with 2.7mm bore hole.

Accessories

conga-QEVAL	007003	Evaluation platform for Qseven 2.0 modules
conga-QKIT	077455	Starterkit for Qseven including conga-QEVAL, conga-LDVI/EPI, conga-FPA1, Dual DVI-D ADD2 Card, ATX power supply...
Qseven Mobility Kit	077460	Complete ready-to-use starter-kit for mobile applications
conga-MCB/Qseven DP	020731	Qseven mini carrier board for mobile applications with DisplayPort
conga-MCB/Qseven Cable Kit	14000041	Complete cable kit for Qseven mini carrier board
Qseven MXM connector Foxconn	400017	Socket for Qseven Carrier Boards. 10pcs package. Foxconn standard type, SMT, lead free, 230 positions, 0.50mm pitch, 7.8mm height.
Qseven MXM Connector Aces	400018	Socket for Qseven Carrier Boards. 10pcs package. ACES standard type, SMT, lead free, 230 positions, 0.50mm pitch, 7.8mm height.
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM

© 2014 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. NOVEMBER 04, 2014 MR

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru