



# Series 204

## Surface Mount Multi-Functional DIP Switch

- Coplanarity: 0.1mm/.004" maximum
- Enclosed actuators shield contacts from foreign particles throughout life of switch
- Available with SPST, SPDT, DPST, 3PST circuitry choices
- Optional top tape seal for board spray washing



### Description

Integral terminal and contact molded into thermoset base provides electrostatic discharge protection rated to 22KV. Optimized gold plated contact design incorporates a dimple wiping interface for long-term contact corrosion resistance.

### Ordering Information

| Series | Number of Poles | Number of Throws | Number of Switch Positions | Actuator Height | Bottom Epoxy Seal | Top Tape Seal | Tape and Reel | Actuation Preset |
|--------|-----------------|------------------|----------------------------|-----------------|-------------------|---------------|---------------|------------------|
| 204-   | 1               | 2                | 1                          | E               | S                 | T             | R             | N                |

| Code  | No. of poles |
|-------|--------------|
| Blank | For SPST     |
| 1     | Single pole  |
| 2     | Double poles |
| 3     | 3 poles      |
| 4     | 4 poles      |

| Code  | Spec.         |
|-------|---------------|
| Blank | For SPST      |
| 1     | Single throw  |
| 2     | Double throws |

| Code | No. of switch positions |
|------|-------------------------|
| 1    | 1 position              |
| 2    | 2 positions             |
| 3    | 3 positions             |
| 4    | 4 positions             |
| 5    | 5 positions             |
| 6    | 6 positions             |
| 7    | 7 positions             |
| 8    | 8 positions             |
| 9    | 9 positions             |
| 10   | 10 positions            |
| 12   | 12 positions            |

| Code  | Spec.                                |
|-------|--------------------------------------|
| Blank | Standard (0.89mm/.035")              |
| E     | Extended (3.43mm/.135") (SPST only)  |
| LP    | Low profile (Flush) (SPST&SPDT only) |

| Code  | Bottom epoxy seal |
|-------|-------------------|
| Blank | No epoxy seal     |
| S     | Epoxy seal        |

| Code  | Spec.                                       |
|-------|---------------------------------------------|
| Blank | Ship at OFF position                        |
| N     | Ship at ON position ( SPST, DPST&3PST only) |

| Code  | Spec.                                           |
|-------|-------------------------------------------------|
| Blank | Anti-static tube packaging                      |
| R     | Tape and reel packaging ( SPST, DPST&3PST only) |

| Code  | Top tape seal                                                |
|-------|--------------------------------------------------------------|
| Blank | No top tape seal                                             |
| T     | Top tape seal (Not available for 7-position SPST DIP switch) |

Notes: Contact CTS for other common features not listed.

Notes: Contact CTS for other common features not listed.

www.ctscorp.com

2019-08-05 Rev. A

Page 1 of 8

©2019 CTS® Corporation. Information/product(s) subject to change. No warranty that product(s) will meet the stated specifications for customer specific applications or test equipment. Visit [www.ctscorp.com](http://www.ctscorp.com) for list of applicable patent(s), more information, or to request a quote.


## Electrical Specifications

| Parameter             | Conditions & Remarks              | Min  | Max   | Unit      |
|-----------------------|-----------------------------------|------|-------|-----------|
| Circuit               | SPST                              | 2    | 12    | positions |
|                       | SPDT                              | 1    | 6     |           |
|                       | DPST                              | 1    | 6     |           |
|                       | 3PST                              | 1    | 4     |           |
| Contact Resistance    | Initial                           |      | 50    | milliohms |
|                       | At end of life                    |      | 100   |           |
| Insulation Resistance | Between insulated terminals       | 1000 |       | megohms   |
| Dielectric Strength   | 500 VAC between adjacent switches |      | 1     | minute    |
| Actuation Life        | 50mA @ 24 VDC                     |      | 5,000 | cycles    |
| Switch Capacitance    | Between adjacent closed switches  |      | 5.0   | pF        |
| Nonswitching Rating   |                                   |      | 100   | mA        |
|                       |                                   |      | 50    | VDC       |
| Coplanarity           |                                   |      | 0.1   | mm        |
|                       |                                   |      | 0.004 | inch      |

## Mechanical and Environmental


|                             |                                                                                                                                               |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Soldering                   | Maximum reflow temperature, 250°C for 30 seconds                                                                                              |
| MSL                         | Level 1                                                                                                                                       |
| RoHS                        | Lead-Free. Fully compliant to RoHS Directive 2011/65/EU                                                                                       |
| Shock                       | Per MIL-STD-202F, method 213B, condition A( 50G's) with no contact inconsistencies greater than 1 microsecond                                 |
| Vibration                   | Per MIL-STD-202F, method 204D, condition B ( .06" or 15G's between 10 HZ to 2K HZ) with no contact inconsistencies greater than 1 microsecond |
| Seal                        | Bottom epoxy seal                                                                                                                             |
|                             | Top tape seal optional                                                                                                                        |
| Marking                     | Special side or top marking available-consult CTS                                                                                             |
| Packaging:                  | Standard anti-static tube packaging, optional tape and reel packaging                                                                         |
| Operating Temperature Range | -40°C to +85°C                                                                                                                                |
| Storage Temperature Range   | -55°C to +85°C                                                                                                                                |

## Soldering Profile

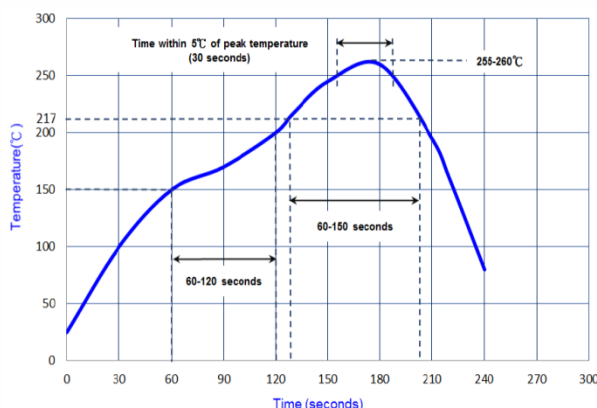

## Mechanical Specifications



Figure 1 - SPST

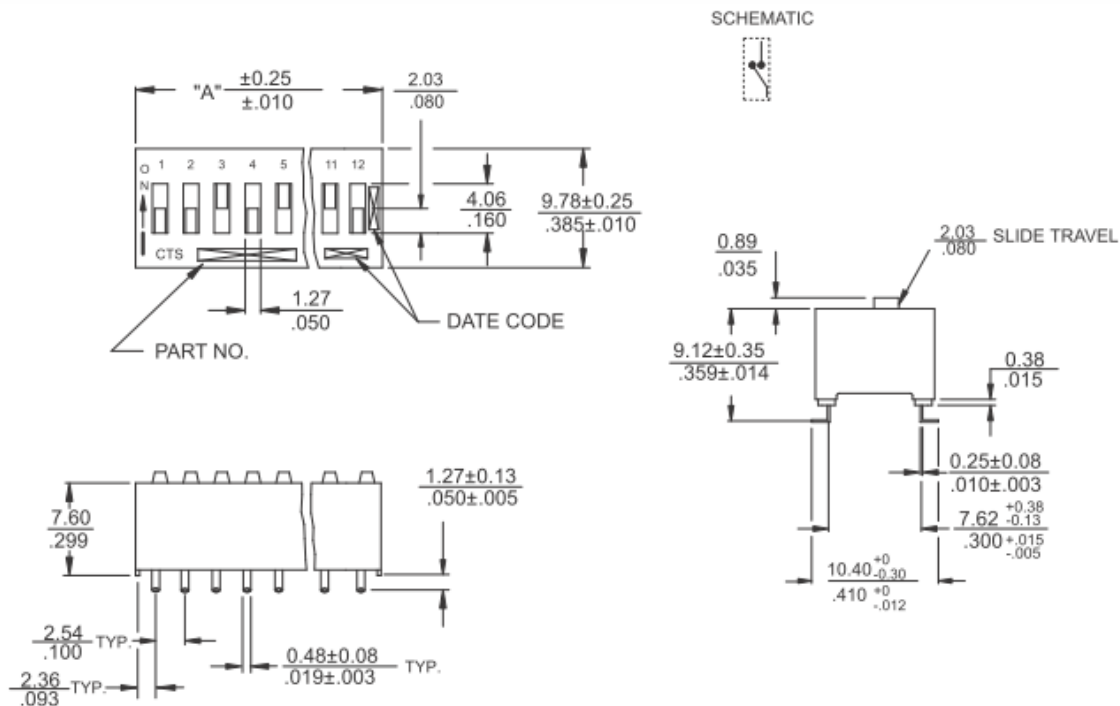

DIMENSION:  $\frac{\text{mm}}{\text{inch}}$

| "A" Overall Dimension | No. of Switch Positions | Part No. |
|-----------------------|-------------------------|----------|
| 7.26 / .286           | 2                       | 204-2    |
| 9.80 / .386           | 3                       | 204-3    |
| 12.34 / .486          | 4                       | 204-4    |
| 14.88 / .586          | 5                       | 204-5    |
| 17.42 / .686          | 6                       | 204-6    |
| 19.96 / .786          | 7                       | 204-7    |
| 22.50 / .886          | 8                       | 204-8    |
| 25.04 / .986          | 9                       | 204-9    |
| 27.58 / 1.086         | 10                      | 204-10   |
| 32.66 / 1.286         | 12                      | 204-12   |


Figure 2 – SPDT/DPST

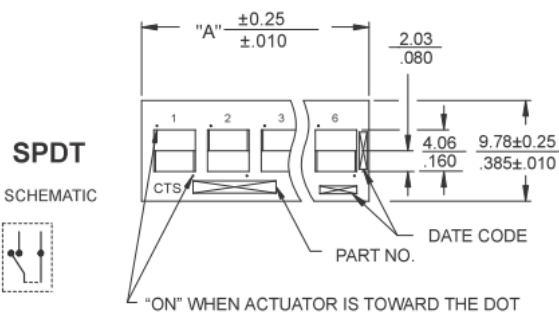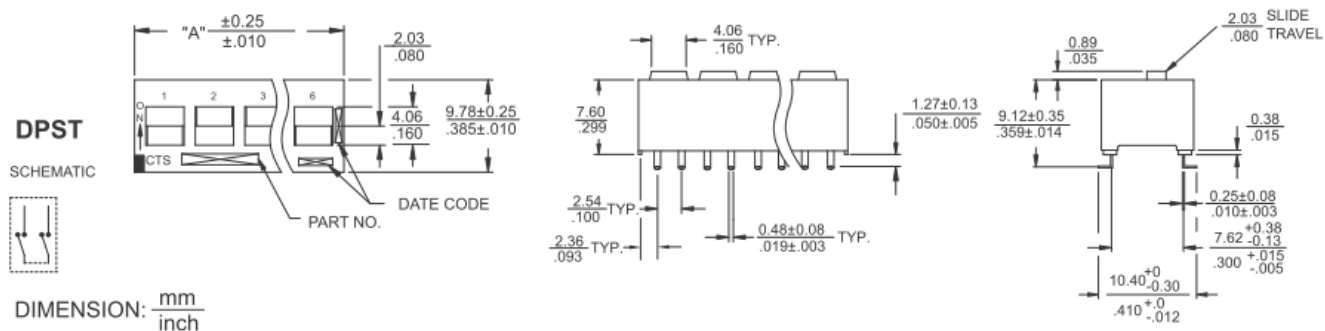

### Ordering Information SPDT/DPST Switches

| "A" Overall Dimension | Number of Switch Positions | Actuation | Part No.        |
|-----------------------|----------------------------|-----------|-----------------|
| 7.26 / .286           | 1                          | SPDT/DPST | 204-121/204-211 |
| 12.34 / .486          | 2                          | SPDT/DPST | 204-122/204-212 |
| 17.42 / .686          | 3                          | SPDT/DPST | 204-123/204-213 |
| 22.50 / .886          | 4                          | SPDT/DPST | 204-124/204-214 |
| 27.58 / 1.086         | 5                          | SPDT/DPST | 204-125/204-215 |
| 32.66 / 1.286         | 6                          | SPDT/DPST | 204-126/204-216 |

Figure 3 - 3PST

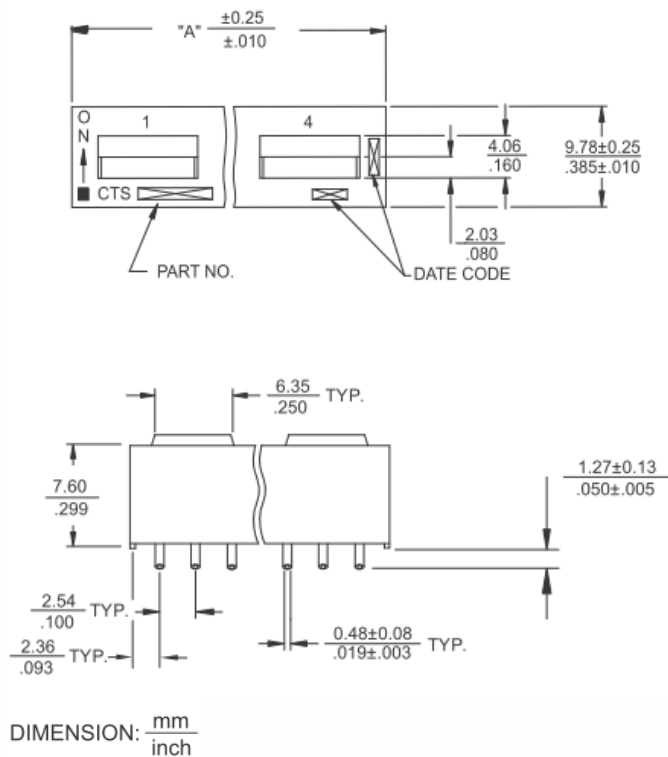

### Ordering Information 3PST Switches

| "A" Overall Dimension | No. of Switch Positions | Actuation | Part No. |
|-----------------------|-------------------------|-----------|----------|
| 9.80 / .386           | 1                       | 3PST      | 204-311  |
| 17.42 / .686          | 2                       | 3PST      | 204-312  |
| 25.04 / .986          | 3                       | 3PST      | 204-313  |
| 32.66 / 1.286         | 4                       | 3PST      | 204-314  |



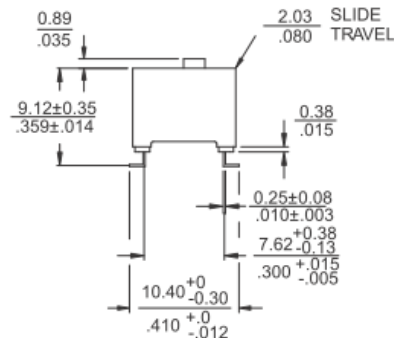


Figure 4 – Low Profile Actuators (SPST&SPDT only)

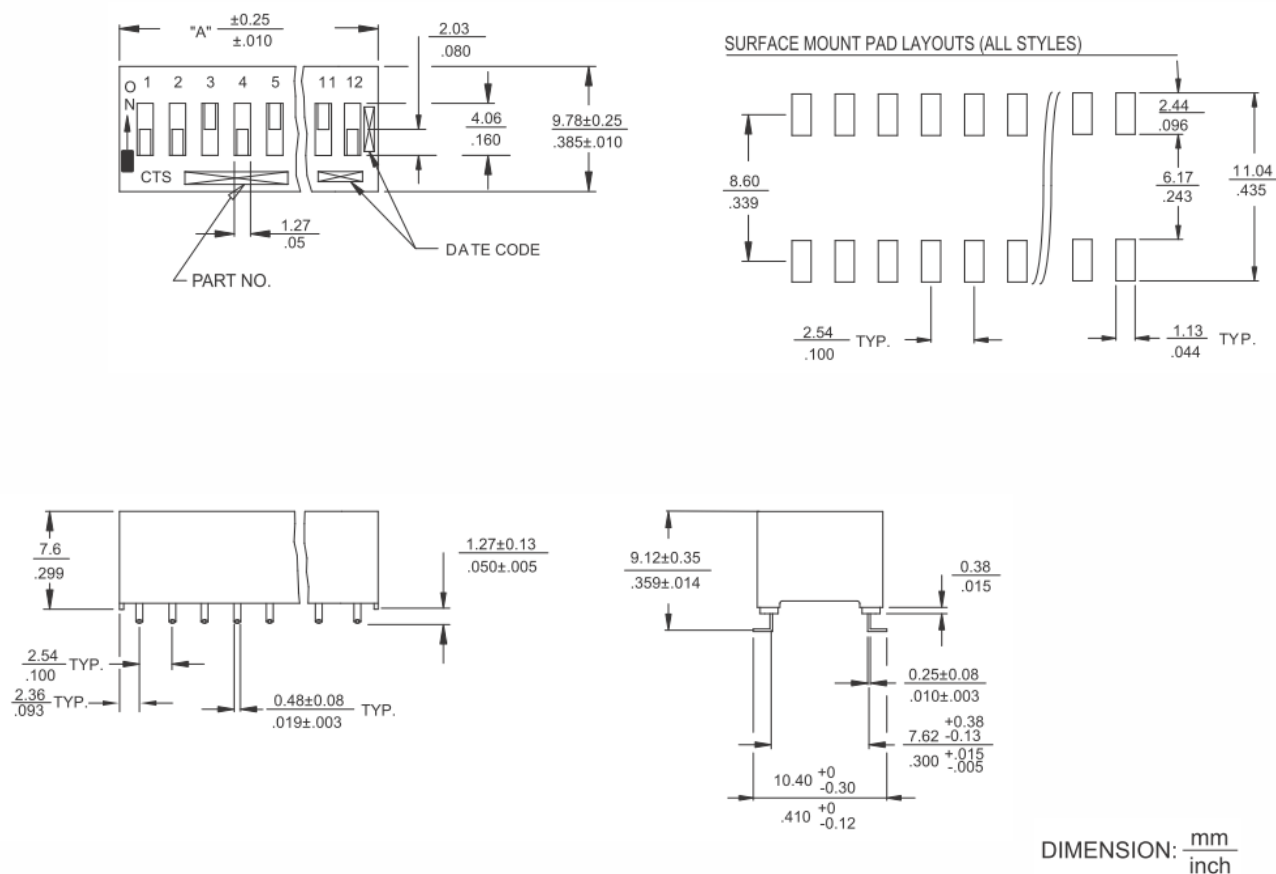

## Packing: Tape and Reel

Unit: mm

| SW Section | Fig | Bo    | W    | F     | S    |
|------------|-----|-------|------|-------|------|
| 2          | I   | 7.15  | 24.0 | 11.50 | -    |
| 3          | I   | 9.69  | 24.0 | 11.50 | -    |
| 4          | I   | 12.23 | 24.0 | 11.50 | -    |
| 5          | II  | 14.81 | 32.0 | 14.20 | 28.4 |
| 6          | II  | 17.35 | 32.0 | 14.20 | 28.4 |
| 8          | II  | 22.40 | 44.0 | 20.20 | 40.4 |
| 12         | II  | 32.56 | 44.0 | 20.20 | 40.4 |

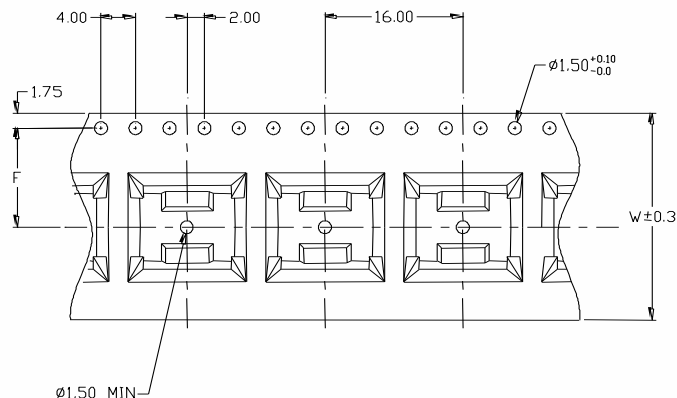


FIG I



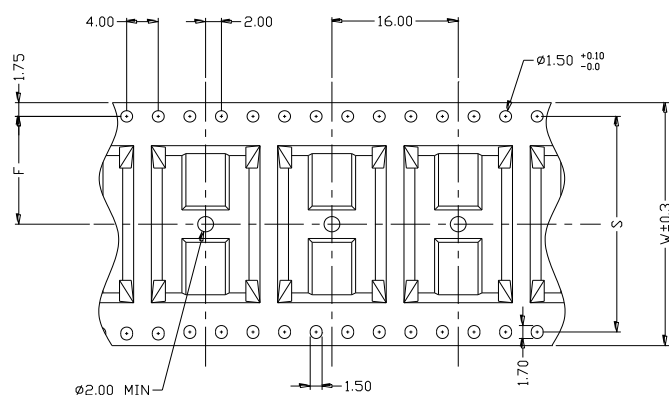


FIG II

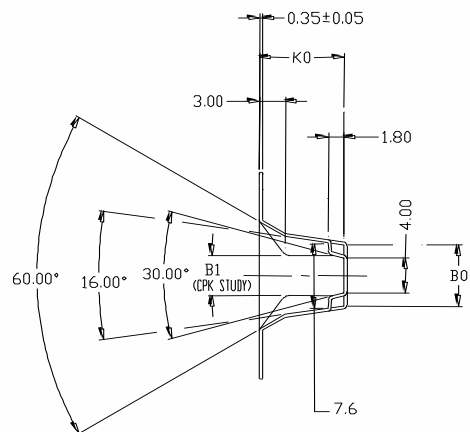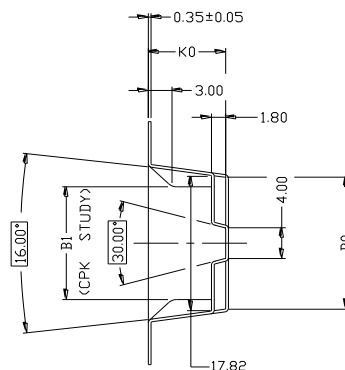


SPECIFIED REEL PARTS DIMENSIONS:

Unit: mm

| SW Section | W1   | W2        | W3                  |
|------------|------|-----------|---------------------|
| 2~4        | 24.4 | 30.4 MAX. | 23.9 MIN./27.4 MAX. |
| 5~6        | 32.4 | 38.4 MAX. | 31.9 MIN./35.4 MAX. |
| 8          | 44.4 | 50.4 MAX. | 43.9 MIN./47.4 MAX. |
| 12         | 44.4 | 50.4 MAX. | 43.9 MIN./47.4 MAX. |

(SEE PICTURE FIG)

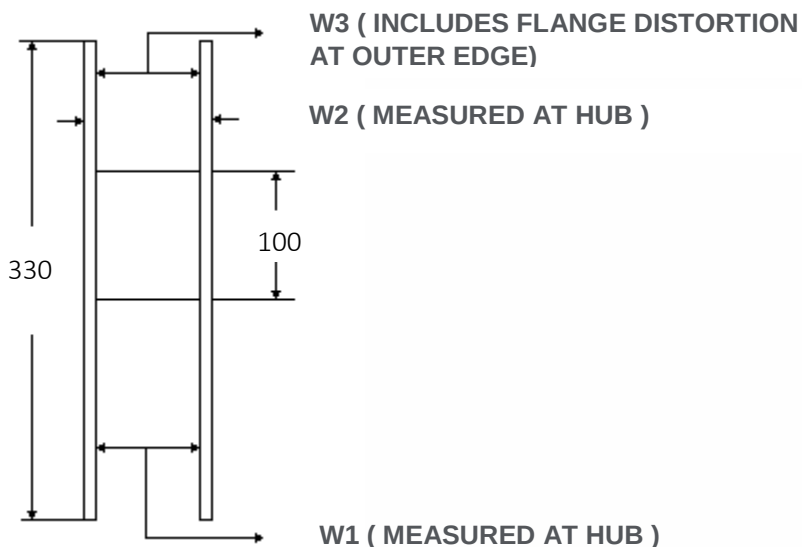


1. TAPE SPROCKET HOLE PITCH :  $4.0 \pm 0.1\text{MM}$
  2. ALL SMT ASSEMBLING MACHINES WILL PICK-UP THE COMPONENT FROM THE POINT, WHICH
  3. IS LOCATED IN THE CENTRE OF TWO ADJACENT SPROCKET HOLES IN FEEDING DIRECTION. THIS MUST BE TAKEK INTO ACCOUNT WHEN DESIGNING THE LOCATION OF THE COMPONENT IN T&R POCKET.
  4. RECOMMENDED PART ORIENTATION IN TAPE & REEL POCKET.
- ORIENT SWITCH TERMINAL #1 TO THE SIDE OF ROUND SPROCKET HOLES, SEE PICTURE BELOW.



#### LENGTH OF TAPE

5. THERE SHALL BE A LEADER OF 390mm MINIMUM WHICH IS SEALED ONTO EMPTY CARRIER TAPE, SEE PICTURE BELOW.

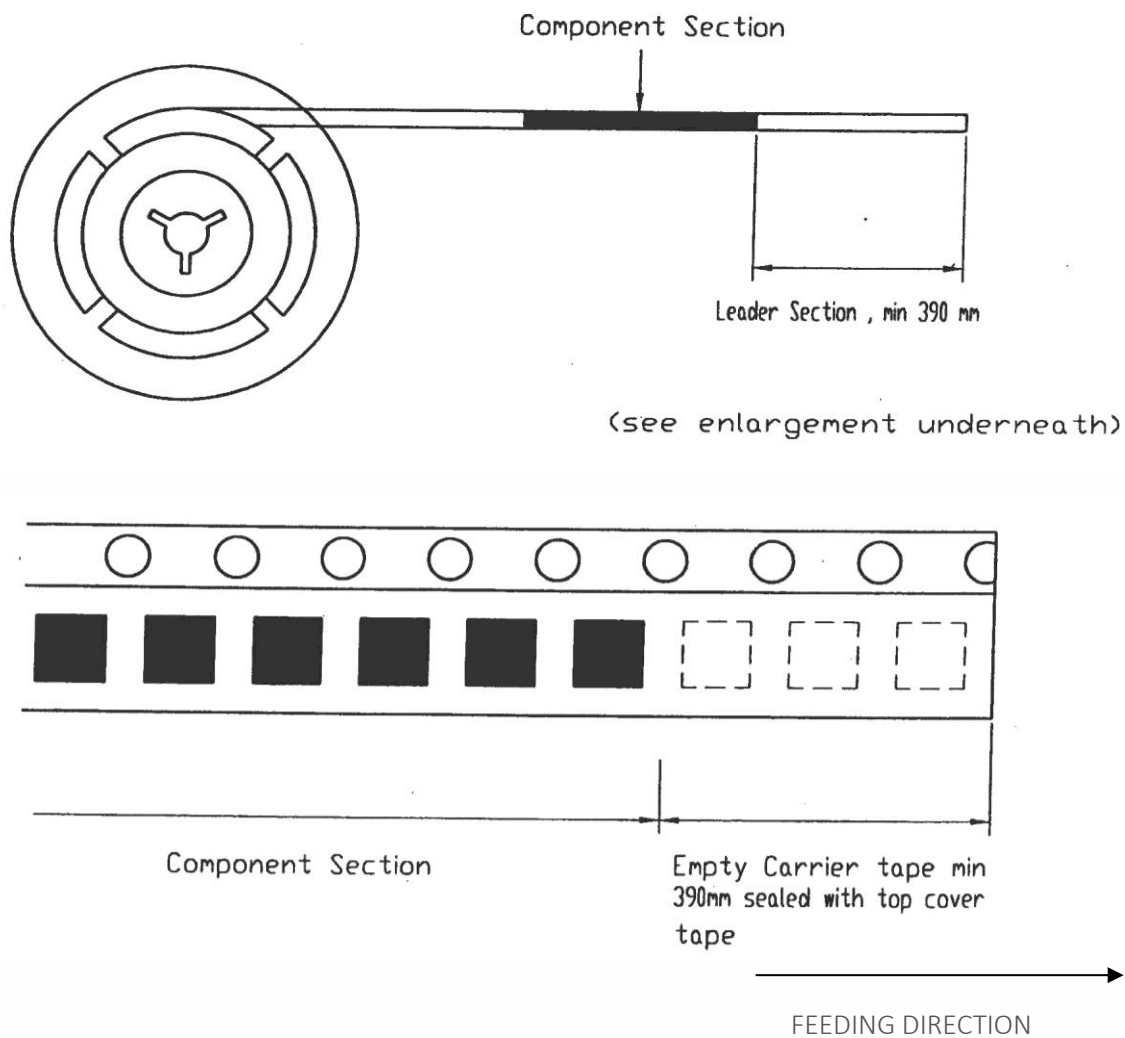

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)