
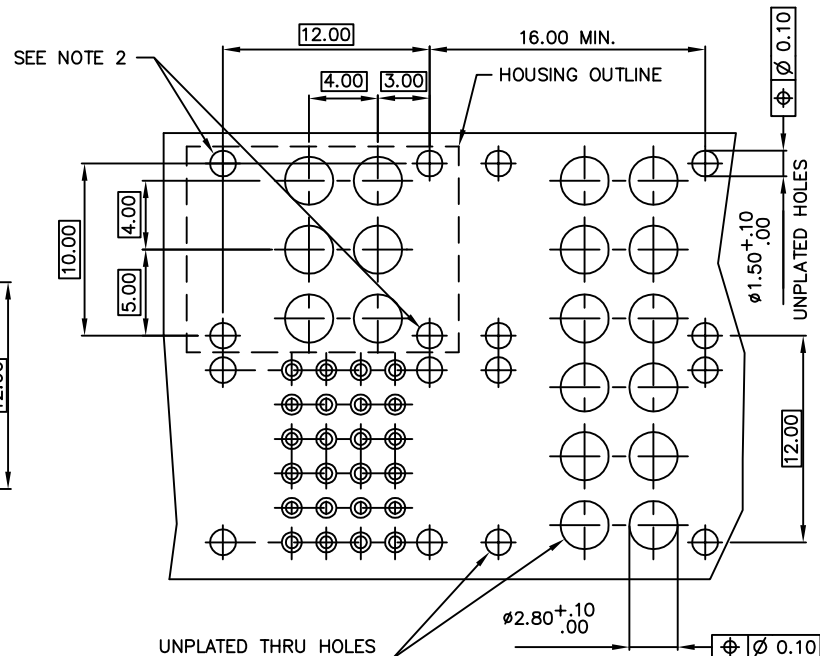
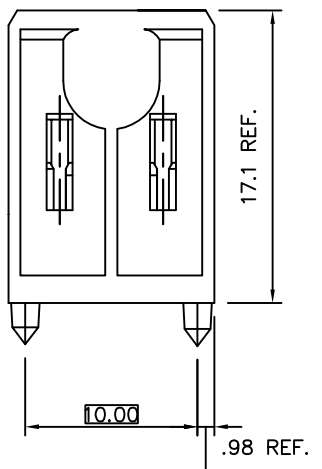


PRODUCT NUMBER
88913-101LF

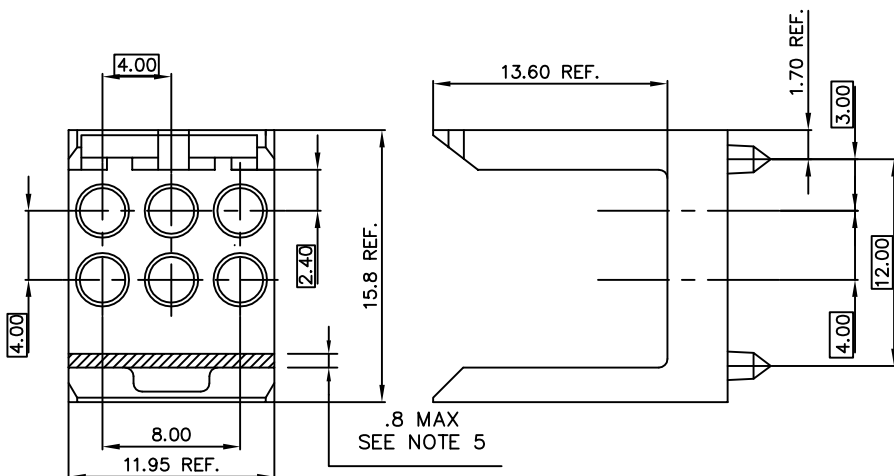

RECOMMENDED HOLE PATTERN COMPONENT SIDE
2MM SIGNAL HOLE PATTERN SHOWN FOR REFERENCE ONLY

NOTES:

1. MATERIAL: LCP, 30% GLASS FILLED
COLOR: NATURAL
FLAME RETARDANT ACC. UL 94-V0
2. THESE HOLES NEEDED WHEN USED IN A
CENTER PLANE APPLICATION WITH A HYBRID
ON EACH SIDE OF THE CENTER PLANE.
3. THE -101LF (SHEET 1) HOUSING IS TO BE USED
WITH MINI-COAX PLUG/PLUG INSERTS, 70296-002LF.
4. THE -111LF (SHT 2) AND -121LF (SHT 3) HOUSING, IS TO BE USED
WITH MINI-COAX INSERTS 88971 OR 88978.
5. THIS AREA MAY CONTAIN IDENTIFICATION SUCH AS MOLD NUMBER,
MOLD CAVITY NUMBER AND/OR MANUFACTURING LOCATION.

6. PART NUMBER WITH "LF" SUFFIX AT THE END IS LEAD FREE.

7. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.


8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20
SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code SEE NOTES				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family METRAL ACC		
ltr	ecn no	dr	date	tolerances unless otherwise specified							title	
H	V20777	CGD	4/23/02	angles	linear	.0±.3			MM		12mm MINI-HYBRID HEADER HOUSING	
J	V21256	CGD	6/24/02			.00±.13						
K	V21707	TAB	10/30/02			.000±.0051						
				0°±2'			scale 1:1					
L	J03-0127	PJ	01/03/04	dr	S.STONER	6/11/92			dwg no		sheet 1 of 3	size
M	M06-0055	MHT	2/01/06	enrg	R.DOUTRICH	6/11/92			88913		A3	
N	M06-0277	MHT	7/22/06	chr	S.STONER	6/11/92						
P	DG10-0263	TER	2010-07-15	appd	S.STONER	6/11/92			type Product Customer Drawing			
sheet	revision	P	P	P								
index	sheet	1	2	3								

PDM: Rev:P


STATUS: Released

Printed: Jul 16, 2010

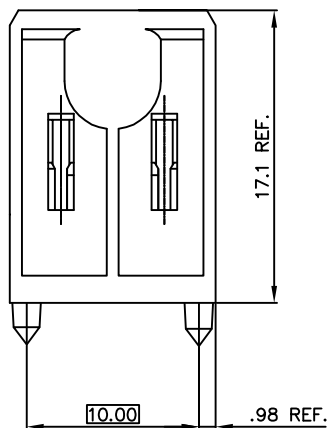

PRESS-FIT HOLES	
HOLE DIAMETER AFTER PLATING	0.65 - 0.80
DRILLED HOLE	0.81 - 0.86 (0.85 DRILL)
COPPER PLATING	0.025 MIN.
TIN PLATING	0.005 - 0.015

1. MATERIAL: LCP, 30% GLASS FILLED
COLOR: NATURAL
FLAME RETARDANT ACC. UL 94-V0
2. THE -111LF AND -121LF (SHEET 3)
HOUSING IS TO BE USED
WITH THE PRESS-FIT TO BOARD
MINI-COAX INSERT, 88978-001LF OR
MINI-COAX PLUG/PLUG COUPLERS,
88971-002LF.

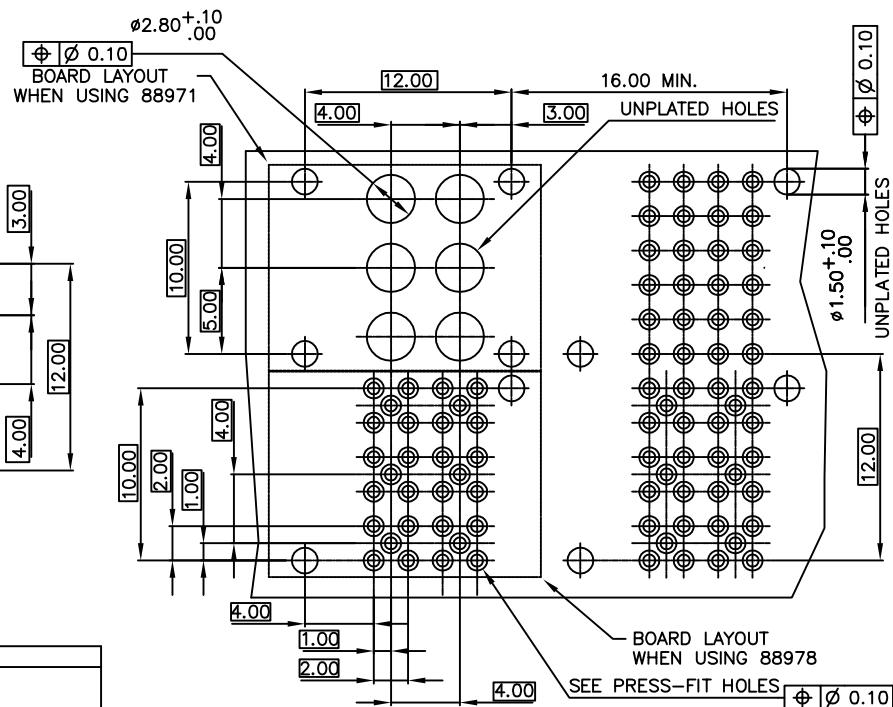


RECOMMENDED HOLE PATTERN COMPONENT SIDE
2MM SIGNAL HOLE PATTERN SHOWN FOR REFERENCE ONLY

- ③. PART NUMBER WITH "LF" SUFFIX AT THE END IS LEAD FREE.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

[illegible]


88913-121LF

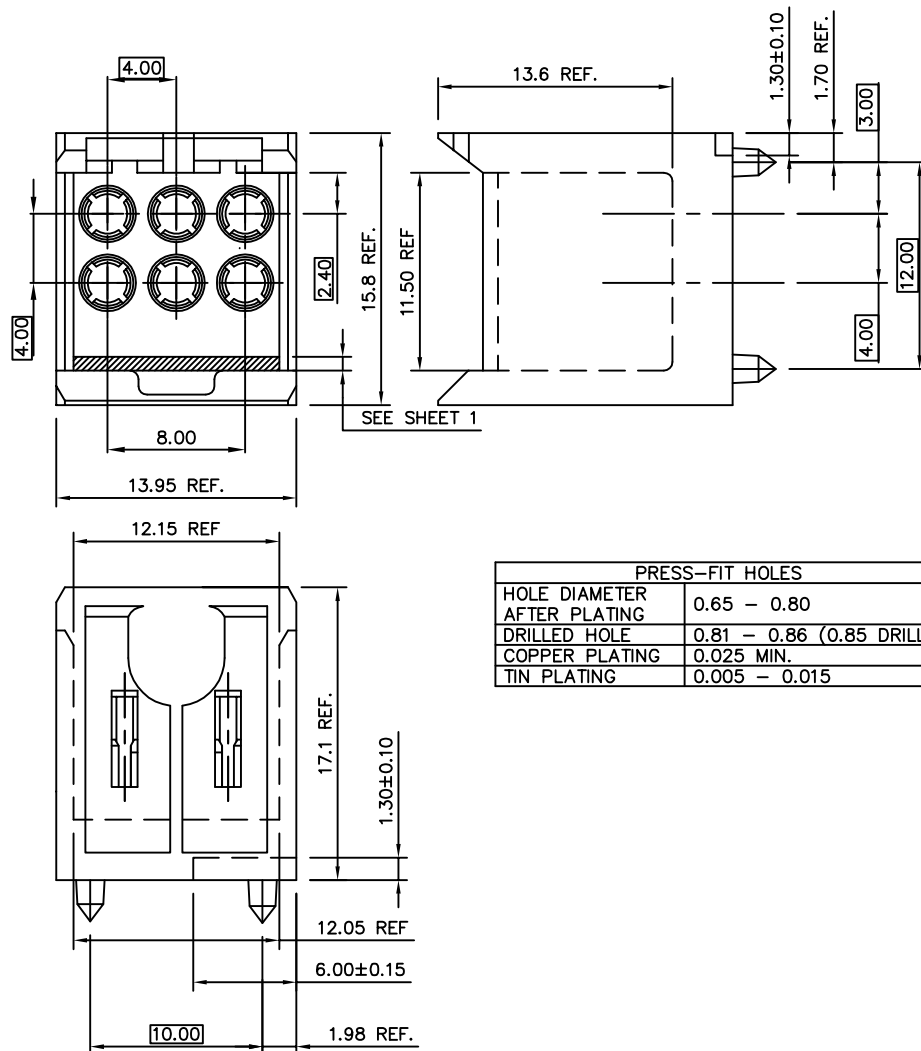

PRESS-FIT HOLES	
HOLE DIAMETER AFTER PLATING	0.65 - 0.80
DRILLED HOLE	0.81 - 0.86 (0.85 DRILL)
COPPER PLATING	0.025 MIN.
TIN PLATING	0.005 - 0.015

NOTES:

1. MATERIAL: LCP, 30% GLASS FILLED, FLAME RETARDANT ACC. UL 94-V0
COLOR: NATURAL
2. THE -111LF AND -121LF (SHEET 3) HOUSING IS TO BE USED WITH THE PRESS-FIT TO BOARD MINI-COAX INSERT, 88978-001LF OR MINI-COAX PLUG/PLUG COUPLERS, 88971-002LF.

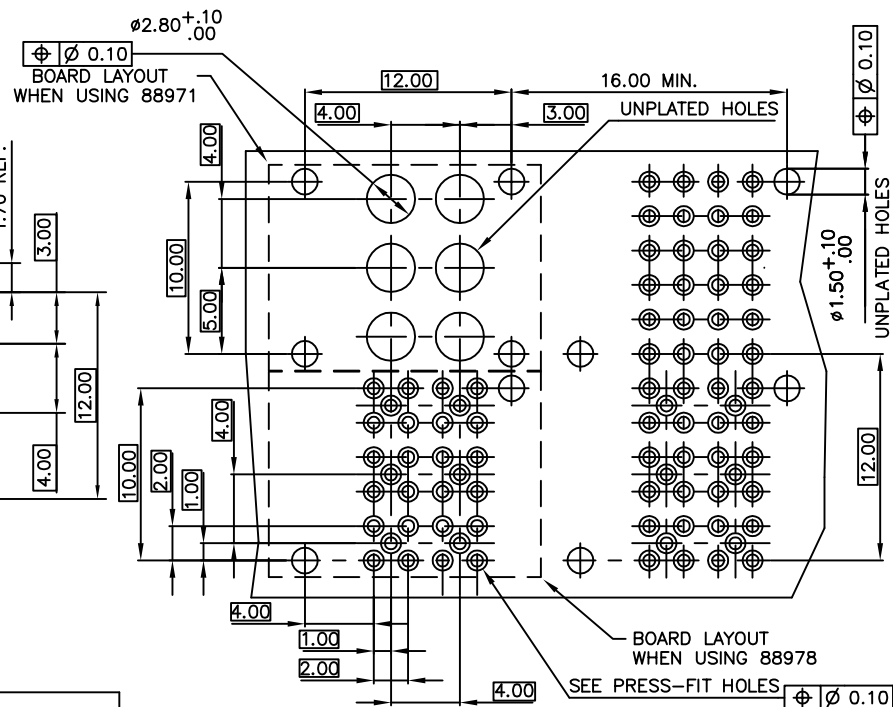

RECOMMENDED HOLE PATTERN COMPONENT SIDE
2MM SIGNAL HOLE PATTERN SHOWN FOR REFERENCE ONLY

- ③ PART NUMBER WITH "LF" SUFFIX AT THE END IS LEAD FREE.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code SEE NOTES				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family METRAL ACC																	
ltr		ecn no		dr		date		tolerances unless otherwise specified						title													
P								angles		linear		.0±.3		 MM													
										.00±.13																	
						0'±2'				.000±.0051																	
								dr		S.STONER		6/11/92															
								engr		R.DOUTRICH		6/11/92															
								chr		S.STONER		6/11/92															
								appd		S.STONER		6/11/92		scale 1:1													
														dwg no													
														sheet 3 of 3													
														size													
														A3													
														type													
														Product Customer Drawing													
sheet index		revision sheet																									

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru