


**Bright Red MSQC4111C**  
**High Efficiency MSQC4911C**  
**Green MSQC4411C**

## PACKAGE DIMENSIONS

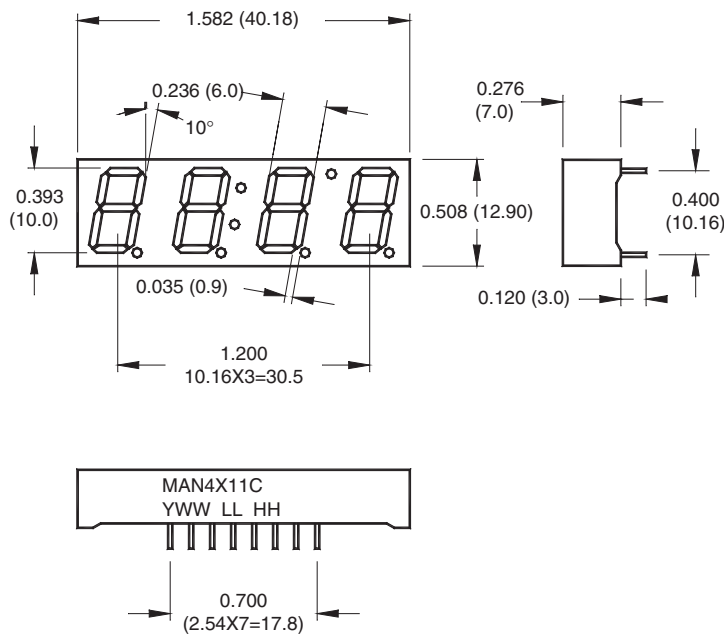

**Notes:**

- Dimensions are in mm (inches)
- Tolerances are  $\pm 0.25\text{mm}$  (0.010") unless otherwise stated.

## Features

- Bright bold segments
- Common Anode/Cathode
- Low Power Consumption
- Low Current Capability
- Neutral Segments
- Grey Face
- Epoxy Encapsulated PCB
- High Performance
- High Reliability

## Applications

- Appliances
- Automotive
- Instrumentation
- Process control

## MODELS AVAILABLE

| Part Number | Color               | Description                              |
|-------------|---------------------|--|
| MSQC4111C   | Bright Red          | Four Digit, 12/24 hour Clock Display, CA |
| MSQC4411C   | Green               | Four Digit, 12/24 hour Clock Display, CA |
| MSQC4911C   | High Efficiency Red | Four Digit, 12/24 hour Clock Display, CA |

**Bright Red MSQC4111C  
High Efficiency MSQC4911C  
Green MSQC4411C**

**ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>** ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

| Part Number<br>Parameter                                      | MSQC4111C | MSQC4411C | MSQC4910C | Units                                      |
|---|-----------|-----------|-----------|--|
| Continuous Forward Current<br>(each segment)                  | 15        | 25        | 25        | mA   |
| Peak Forward Current<br>( $F = 10\text{KHz}$ , $D/F = 1/10$ ) | 60        | 100       | 90        | mA   |
| Power Dissipation ( $P_D$ )                                   | 40        | 75        | 70        | mW   |
| *Derate Linearly from $25^\circ\text{C}$                      | 0.17      | 0.33      | 0.33      | mW   |
| Reverse Voltage per Die                                       |           |           |           | 5 Volts                                    |
| Operating and Storage Temperature Range                       |           |           |           | $-40^\circ\text{C}$ to $+85^\circ\text{C}$ |
| Lead soldering time (1/16 inch from standoff)                 |           |           |           | 5 seconds @ $230^\circ\text{C}$            |

**ELECTRO-OPTICAL CHARACTERISTICS<sup>(1)</sup>** ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)


| Part Number<br>Parameter                     | MSQC4111C | MSQC4411C | MSQC4911C | Units          | Test<br>Condition      |
|--|-----------|-----------|-----------|----------------|------------------------|
| Luminous intensity <sup>(2)</sup> ( $I_V$ )  |           |           |           |                |                        |
| Minimum (Standard Current)                   | 300       | 800       | 800       | $\mu\text{cd}$ | $I_F = 20\text{mA}$    |
| Typical (Standard Current)                   | 700       | 2000      | 2000      | $\mu\text{cd}$ | $I_F = 20\text{mA}$    |
| Minimum (Low Current)                        |           |           |           | Not Available  |                        |
| Typical (Low Current)                        |           |           |           | Not Available  |                        |
| Forward Voltage ( $V_F$ )                    |           |           |           |                |                        |
| Typical (Standard Current)                   | 2.10      | 2.10      | 2.00      | V              | $I_F = 20\text{mA}$    |
| Maximum (Standard Current)                   | 2.80      | 2.80      | 2.80      | V              | $I_F = 20\text{mA}$    |
| Typical (Low Current)                        |           |           |           | Not Available  |                        |
| Maximum (Low Current)                        |           |           |           | Not Available  |                        |
| Peak Wavelength                              | 695       | 570       | 635       | nm             | $I_F = 20\text{mA}$    |
| Dominant Wavelength                          |           |           |           | Not Available  |                        |
| Spectral Line 1/2 Width                      | 90        | 30        | 45        | nm             | $I_F = 10\text{mA}$    |
| Reverse B <sup>(3)</sup> . Voltage ( $V_R$ ) | 5         | 5         | 5         | V              | $I_R = 100\mu\text{A}$ |

NOTES:


- (1) Data per individual LED element
- (2) Luminous intensity ( $\mu\text{cd}$ ) = average light output per segment
- (3) B = breakdown

**Bright Red MSQC4111C**  
**High Efficiency MSQC4911C**  
**Green MSQC4411C**

**PIN ORIENTATION, SEGMENT IDENTIFICATION, AND PRODUCT MARKING**

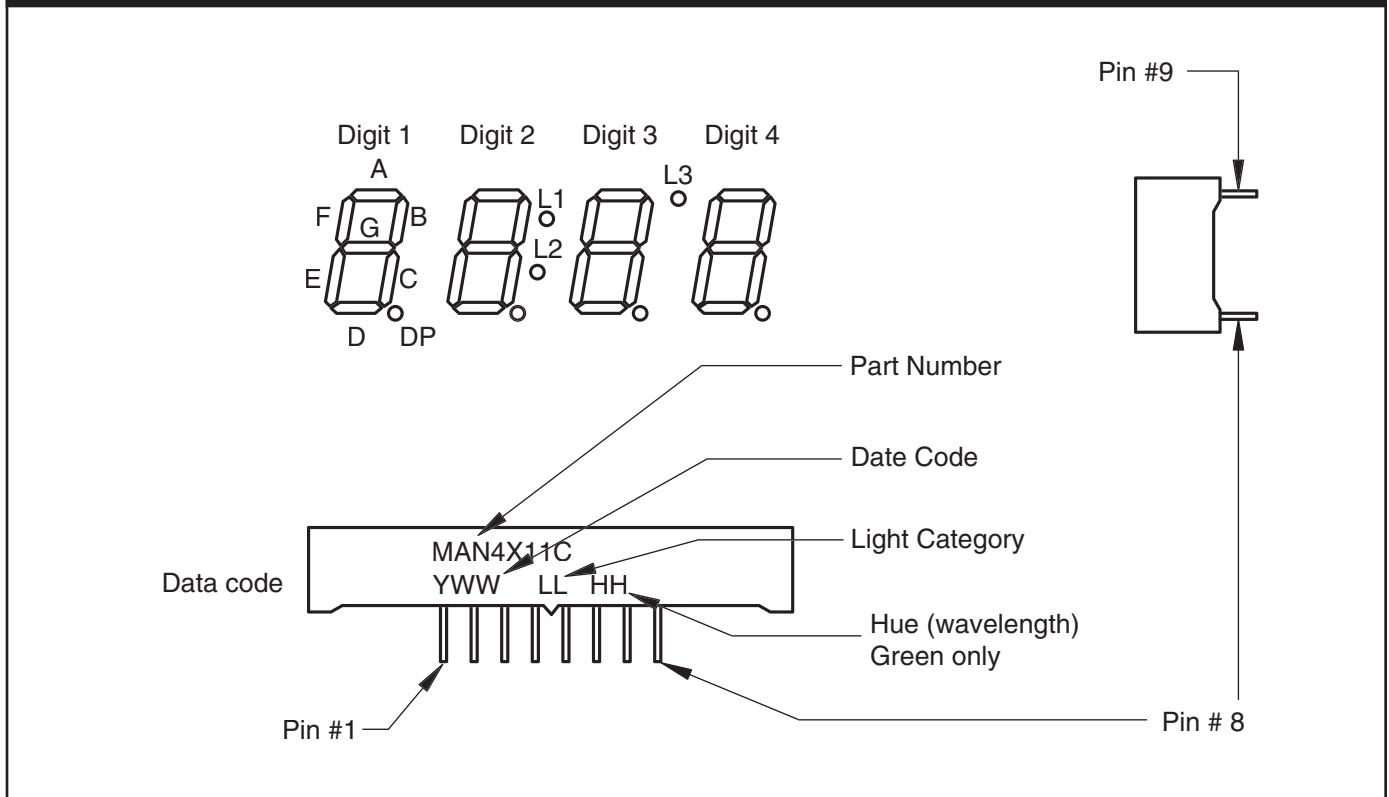

**SCHEMATICS**

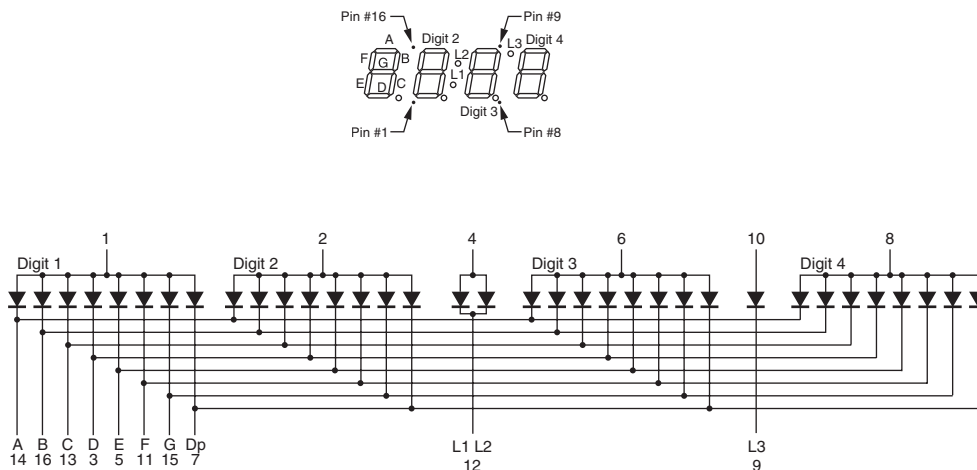

**Bright Red MSQC4111C  
High Efficiency MSQC4911C  
Green MSQC4411C**

**GRAPHICAL DATA Bright Red ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)**

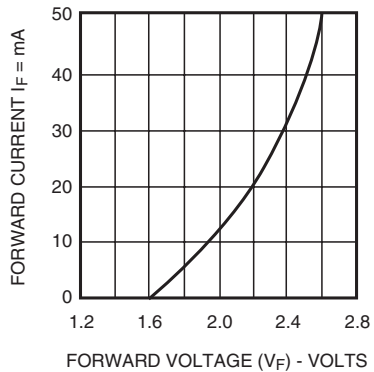


Fig. 1 FORWARD CURRENT VS. FORWARD VOLTAGE

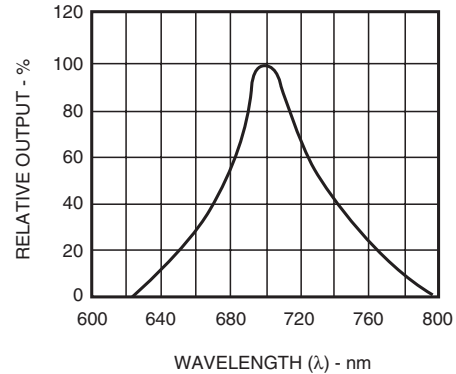


Fig. 2 SPECTRAL RESPONSE

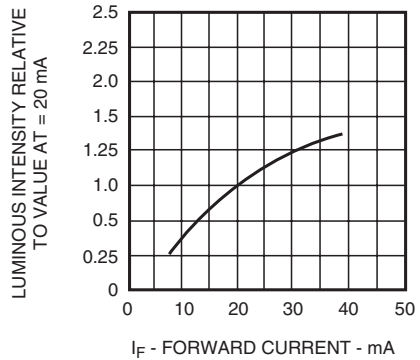


Fig. 3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

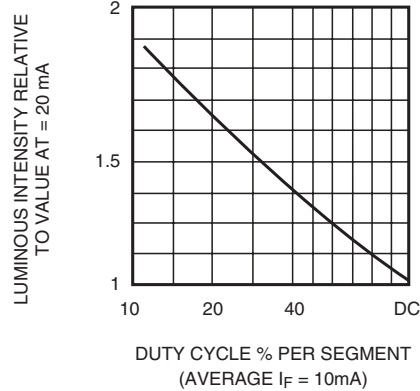


Fig. 5 LUMINOUS INTENSITY VS. DUTY CYCLE

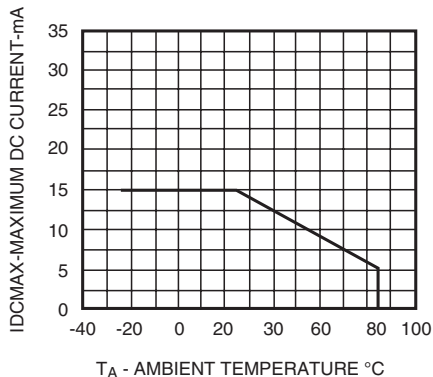


Fig. 4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

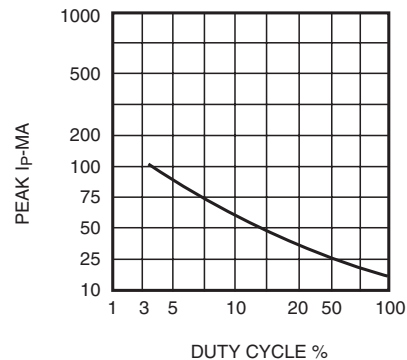


Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE  $f = 1\text{ KHz}$ )

**Bright Red MSQC4111C  
High Efficiency MSQC4911C  
Green MSQC4411C**

**GRAPHICAL DATA Green ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)**

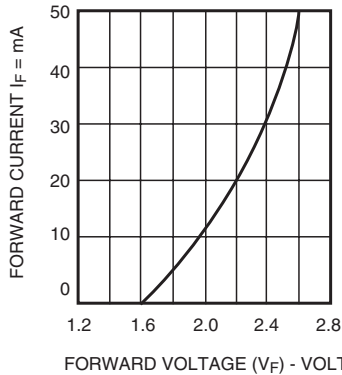


Fig. 1 FORWARD CURRENT VS. FORWARD VOLTAGE

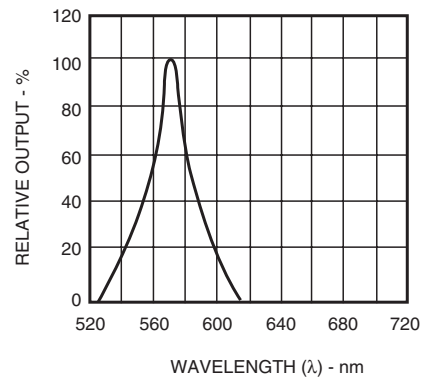


Fig. 2 SPECTRAL RESPONSE

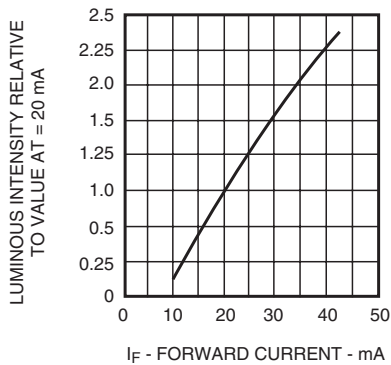


Fig. 3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

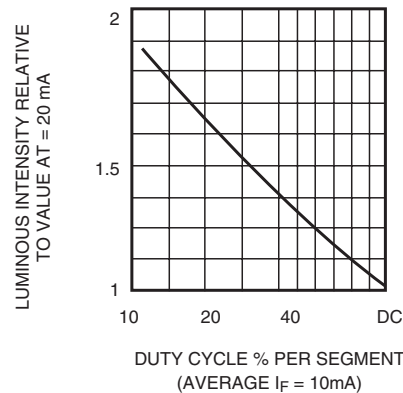


Fig. 5 LUMINOUS INTENSITY VS. DUTY CYCLE

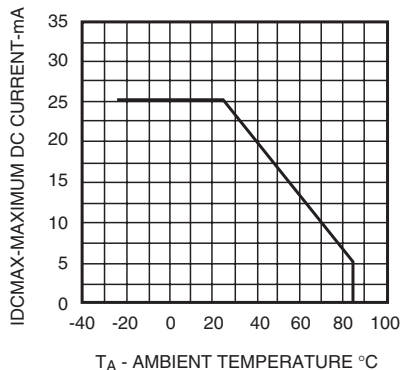


Fig. 4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

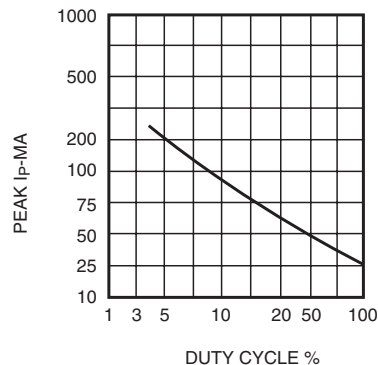


Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE  $f = 1\text{ KHz}$ )

**Bright Red MSQC4111C  
High Efficiency MSQC4911C  
Green MSQC4411C**

**GRAPHICAL DATA High Efficiency Red ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)**

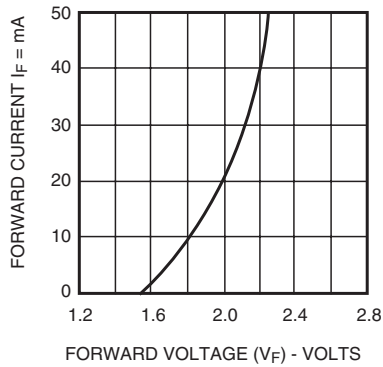


Fig. 1 FORWARD CURRENT VS. FORWARD VOLTAGE

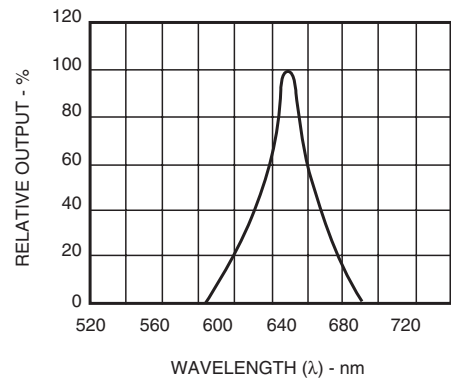


Fig. 2 SPECTRAL RESPONSE

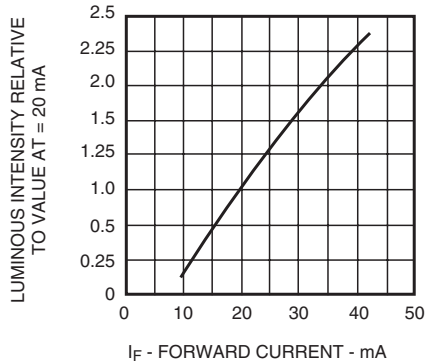


Fig. 3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

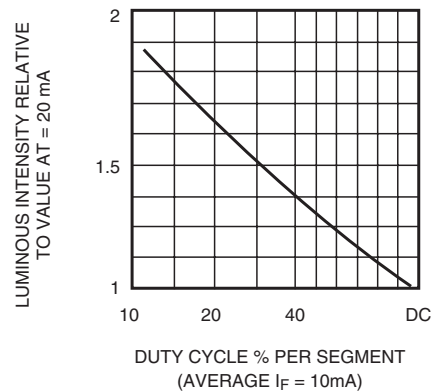


Fig. 5 LUMINOUS INTENSITY VS. DUTY CYCLE

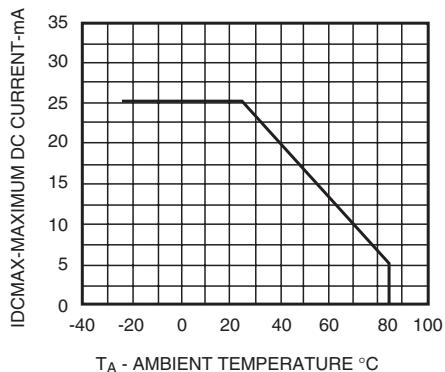


Fig. 4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

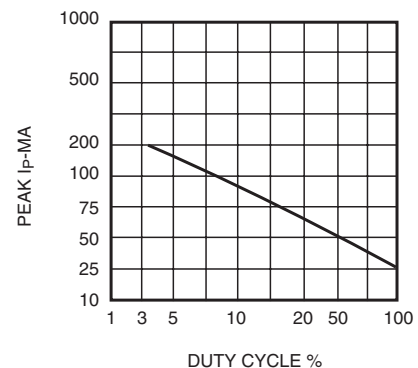


Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE  $f = 1 \text{ KHz}$ )

---

**Bright Red MSQC4111C  
High Efficiency MSQC4911C  
Green MSQC4411C**

---

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)