



NPN/PNP SILICON COMPLEMENTARY SMALL SIGNAL DUAL TRANSISTOR

Qualified per MIL-PRF-19500/421

Qualified Levels:
JAN, JANTX, and
JANTXV

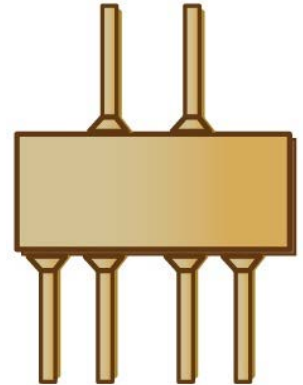
DESCRIPTION

This 2N3838 device in a 6-pin Flatpack package is military qualified up to a JANTXV level for high-reliability applications. Microsemi also offers numerous other products to meet higher and lower power voltage regulation applications.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- JAN, JANTX, and JANTXV qualifications also available per MIL-PRF-19500/421.
- RoHS compliant versions available (commercial grade only).




**6-Pin Flatpack
Package**

APPLICATIONS / BENEFITS

- Two complementary small signal silicon transistors in a single package design.
- Lightweight.

Also available in:

 **TO-78 package**
(leaded)
[2N4854](#)

 **6-Pin U package**
(surface mount)
[2N4854U](#)

MAXIMUM RATINGS

Parameters/Test Conditions	Symbol	Value per		Unit
		Each Transistor	Total Package	
Thermal Resistance Junction-to-Case	R _{θJC}	250	125	°C/W
Thermal Resistance Junction-to-Ambient	R _{θJA}	350	290	°C/W
Total Power Dissipation @ T _A = +25 °C ⁽¹⁾	P _T	0.25	0.35	W
Total Power Dissipation @ T _C = +25 °C ⁽²⁾	P _T	0.7	1.4	W
Junction and Storage Temperature	T _J and T _{STG}	-65 to +200		°C
Collector-Base Voltage, Emitter Open	V _{CB0}	60		V
Emitter-Base Voltage, Collector Open	V _{EB0}	5		V
Collector-Emitter Voltage, Base Open	V _{CEO}	40		V
Collector Current, dc	I _C	600		mA
Lead to Case Voltage		+/- 120		V
Solder Temperature @ 10 s	T _{SP}	260		°C

Notes: 1. For T_A > +25 °C, derate linearly 1.43 mW/°C one transistor, 2.00 mW/°C both transistors.
2. For T_C > +25 °C, derate linearly 4.0 mW/°C one transistor, 8.0 mW/°C both transistors.

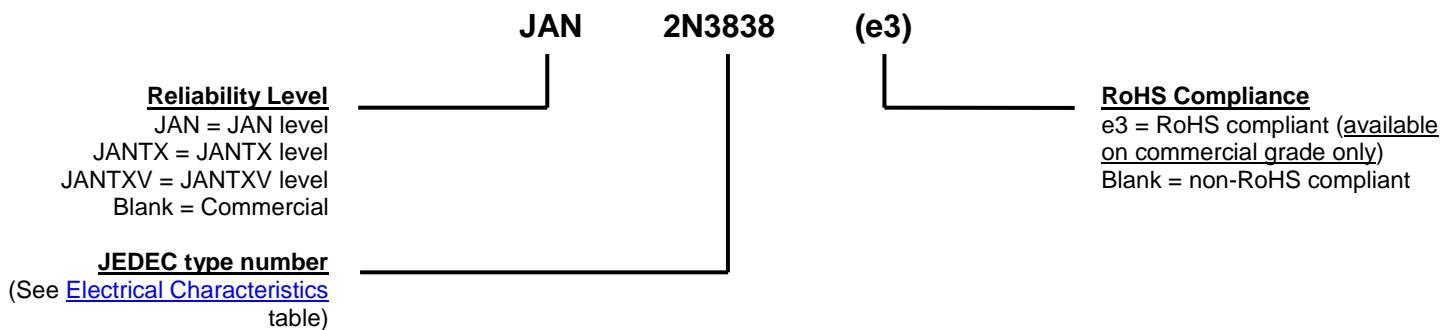
MSC – Lawrence
6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland
Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:
www.microsemi.com

MECHANICAL and PACKAGING

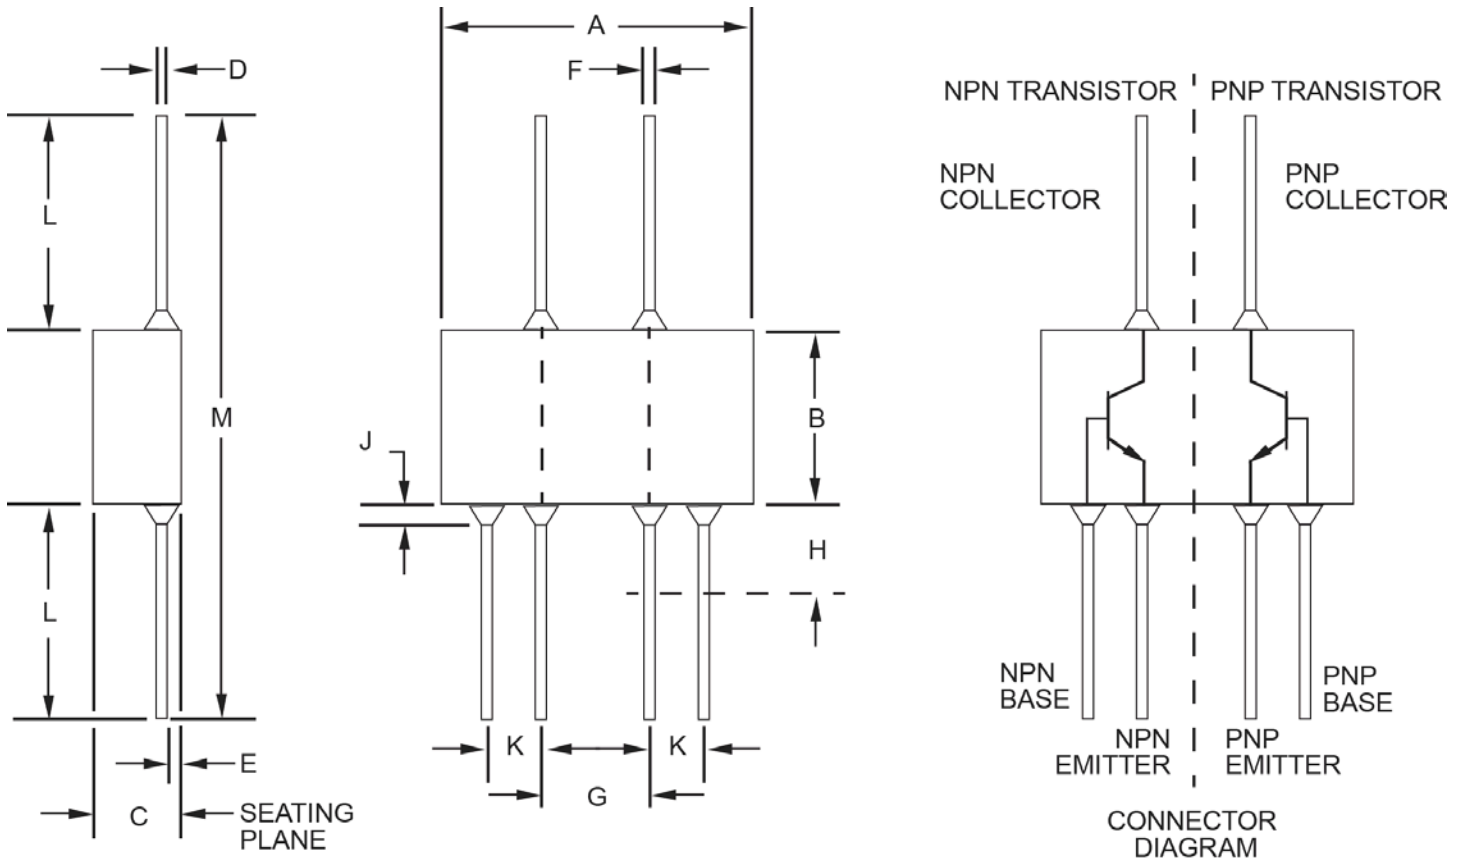
- CASE: Hermetic ceramic (white), Au over Ni plated kovar cover.
- TERMINALS: Au over Ni plated copper.
- MARKING: Manufacturer's ID, part number, date code, Pin 1 Identifier.
- POLARITY: See Case Outline.
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE

SYMBOLS & DEFINITIONS

Symbol	Definition
I_B	Base Current, dc.
I_C	Collector Current, dc.
I_E	Emitter Current, dc.
I_O	Average Rectified Output Current: The Output Current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
V_{CB}	Collector-Base Voltage (dc).
V_{CE}	Collector-Emitter Voltage, dc.
V_{EB}	Emitter-Base Voltage (dc).

ELECTRICAL CHARACTERISTICS @ $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted.

Characteristics	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Current $I_C = 10\text{ mA}$ (pulsed)	$V_{(BR)CEO}$	40		V
Collector-Base Cutoff Current $V_{EB} = 5\text{ V}$	$I_{CBO(1)}$		10	μA
Collector-Base Cutoff Current $V_{CB} = 50\text{ V}$	$I_{CBO(2)}$		50	nA
Emitter-Base Cutoff Current $V_{EB} = 5.0\text{ V}$ $V_{EB} = 3.0\text{ V}$	$I_{EBO(1)}$ $I_{EBO(2)}$		10 10	μA nA
ON CHARACTERISTICS				
Forward-Current Transfer Ratio $I_C = 150\text{ mA}$, $V_{CE} = 1\text{ V}$ $I_C = 100\text{ }\mu\text{A}$, $V_{CE} = 10\text{ V}$ $I_C = 1.0\text{ mA}$, $V_{CE} = 10\text{ V}$ $I_C = 10\text{ mA}$, $V_{CE} = 10\text{ V}$ $I_C = 150\text{ mA}$, $V_{CE} = 10\text{ V}$ $I_C = 300\text{ mA}$, $V_{CE} = 10\text{ V}$	h_{FE}	50 35 50 75 100 35	300	
Collector-Emitter Saturation Voltage $I_C = 150\text{ mA}$, $I_B = 15\text{ mA}$	$V_{CE(sat)}$		0.40	V
Base-Emitter Saturation Voltage $I_C = 150\text{ mA}$, $I_B = 15\text{ mA}$	$V_{BE(sat)}$	0.80	1.25	V
DYNAMIC CHARACTERISTICS				
Forward Current Transfer Ratio $I_C = 1.0\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ kHz}$	h_{fe}	60	300	
Forward Current Transfer Ratio, Magnitude $I_C = 20\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 100\text{ MHz}$	$ h_{fe} $	2.0	10	
Small-Signal Common Emitter Input Impedance $I_C = 1.0\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ kHz}$	h_{ie}	1.5	9.0	$\text{k}\Omega$
Small-Signal Common Emitter Output Admittance $I_C = 1.0\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ kHz}$	h_{oe}		50	μhmo
Open Circuit Output Capacitance $V_{CB} = 10\text{ V}$, $I_E = 0$, $100\text{ kHz} \leq f \leq 1.0\text{ MHz}$	C_{obo}		8.0	pF
Noise Figure $I_C = 100\text{ }\mu\text{A}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ kHz}$, $R_G = 1.0\text{ k}\Omega$	NF		8.0	dB
SWITCHING CHARACTERISTICS				
Turn-On Time (Saturated) (Reference MIL-PRF-19500/421, figure 7)	t_{on}		45	ns
Turn-Off Time (Saturated) (Reference MIL-PRF-19500/421, figure 8)	t_{off}		300	ns
Pulse Response (Non-Saturated) (Reference MIL-PRF-19500/421, figure 9)	$t_{on} + t_{off}$		18	ns
Collector-Emitter Non-Latching Voltage	V_{CEO}	40		V

PACKAGE DIMENSIONS


Ltr	Dimensions				Notes
	Inch		Millimeters		
	Min	Max	Min	Max	
A	.240	.290	6.10	7.37	
B	.115	.160	2.92	4.06	
C	.030	.080	0.76	2.03	
D	.003	.006	0.08	0.15	4
E	.005	.035	0.13	0.89	
F	.010	.019	0.25	0.48	4, 6

Ltr	Dimension				Notes
	Inch		Millimeters		
	Min	Max	Min	Max	
G	.100 TP		2.54 TP		6,7
H	-	.050	-	1.27	
J	-	.015	-	0.38	5
K	.050 TP		1.27 TP		6,7
L	.070	.250	1.78	6.35	3,4
M	.260	.650	6.60	16.51	

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Maximum limit of this dimension does not apply to device supplied in a carrier.
4. All six leads.
5. Lead dimensions are uncontrolled in this zone.
6. Dimensions "F", "G", and "K" to be measured in zone "H".
7. Leads within .005 inch (0.13 mm) total of true position (TP) at "H" with maximum material condition.
8. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[2N3838](#) [2N3838/TR](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru