

# HXA Series


- High reliability and high voltage are realized by hybrid electrolyte
- Endurance with ripple current : 4,000 hours at 125°C
- Rated voltage range : 16 to 80Vdc, Capacitance range : 10 to 470μF
- For high temperature and high reliability applications.  
(Automotive equipment, Base station equipment, etc.)

## ◆ SPECIFICATIONS

| Items                                                     | Characteristics                                                                                                                                                                                                                                                                         |                                       |      |      |      |      |      |                   |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------|------|------|------|------|-------------------|
| Category                                                  | -55 to +125°C                                                                                                                                                                                                                                                                           |                                       |      |      |      |      |      |                   |
| Temperature Range                                         |                                                                                                                                                                                                                                                                                         |                                       |      |      |      |      |      |                   |
| Rated Voltage Range                                       | 16 to 80V <sub>dc</sub>                                                                                                                                                                                                                                                                 |                                       |      |      |      |      |      |                   |
| Capacitance Tolerance                                     | ±20% (M) (at 20°C , 120Hz)                                                                                                                                                                                                                                                              |                                       |      |      |      |      |      |                   |
| Leakage Current                                           | I=0.01CV<br>Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)                                                                                                                                                         |                                       |      |      |      |      |      |                   |
| Dissipation Factor<br>(tan δ )                            | Rated voltage (V <sub>dc</sub> )                                                                                                                                                                                                                                                        | 16V                                   | 25V  | 35V  | 50V  | 63V  | 80V  | (at 20°C , 120Hz) |
|                                                           | tan δ (Max.)                                                                                                                                                                                                                                                                            | 0.16                                  | 0.14 | 0.12 | 0.10 | 0.08 | 0.08 |                   |
| Low Temperature Characteristics<br>(Max. Impedance Ratio) | Z(-25°C ) / Z(+20°C ) ≤ 1.5<br>Z(-55°C ) / Z(+20°C ) ≤ 2.0 (at 100kHz)                                                                                                                                                                                                                  |                                       |      |      |      |      |      |                   |
| Endurance                                                 | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 4,000 hours at 125°C .                                        |                                       |      |      |      |      |      |                   |
|                                                           | Capacitance change                                                                                                                                                                                                                                                                      | ≤ ±30% of the initial value           |      |      |      |      |      |                   |
|                                                           | D.F. (tan δ )                                                                                                                                                                                                                                                                           | ≤ 200% of the initial specified value |      |      |      |      |      |                   |
|                                                           | ESR                                                                                                                                                                                                                                                                                     | ≤ 200% of the initial specified value |      |      |      |      |      |                   |
|                                                           | Leakage current                                                                                                                                                                                                                                                                         | ≤ The initial specified value         |      |      |      |      |      |                   |
| Shelf Life                                                | The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4. |                                       |      |      |      |      |      |                   |
|                                                           | Capacitance change                                                                                                                                                                                                                                                                      | ≤ ±30% of the initial value           |      |      |      |      |      |                   |
|                                                           | D.F. (tan δ )                                                                                                                                                                                                                                                                           | ≤ 200% of the initial specified value |      |      |      |      |      |                   |
|                                                           | ESR                                                                                                                                                                                                                                                                                     | ≤ 200% of the initial specified value |      |      |      |      |      |                   |
|                                                           | Leakage current                                                                                                                                                                                                                                                                         | ≤ The initial specified value         |      |      |      |      |      |                   |

## ◆ DIMENSIONS [mm]

- Terminal Code : A

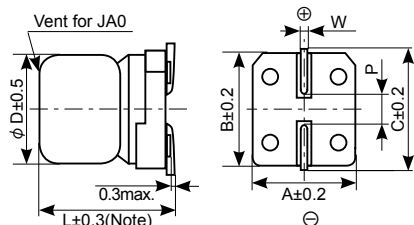

Note : L±0.5 for HA0 and JA0

| Size Code | φ D | L    | A    | B    | C    | W          | P   |
|-----------|-----|------|------|------|------|------------|-----|
| F61       | 6.3 | 5.8  | 6.6  | 6.6  | 7.2  | 0.5 to 0.8 | 1.9 |
| F80       | 6.3 | 7.7  | 6.6  | 6.6  | 7.2  | 0.5 to 0.8 | 1.9 |
| HA0       | 8   | 10.0 | 8.3  | 8.3  | 9.0  | 0.7 to 1.1 | 3.1 |
| JA0       | 10  | 10.0 | 10.3 | 10.3 | 11.0 | 0.7 to 1.1 | 4.5 |

## ◆ MARKING


EX) 35V47μF



- Rated voltage symbol

| Rated voltage (Vdc) | Symbol |
|---------------------|--------|
| 16                  | C      |
| 25                  | E      |
| 35                  | V      |
| 50                  | H      |
| 63                  | J      |
| 80                  | K      |

## ◆ PART NUMBERING SYSTEM

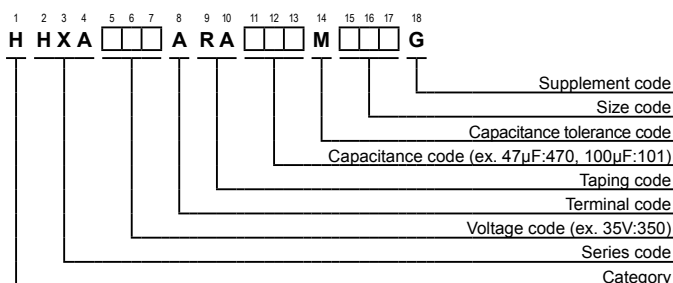

Please contact us for mass production schedule.  
Specifications in this bulletin are subject to change without notice.

## HXA Series

## ◆ STANDARD RATINGS

| WV<br>(V <sub>dc</sub> ) | Cap<br>(μF) | Size code | ESR<br>(mΩmax/20°C, 100kHz) | Rated ripple current<br>(mA <sub>rms</sub> /125°C, 100kHz) | Part No.           |
|--------------------------|-------------|-----------|-----------------------------|------------------------------------------------------------|--------------------|
| 16                       | 82          | F61       | 45                          | 950                                                        | HHXA160ARA820MF61G |
|                          | 150         | F80       | 27                          | 1,300                                                      | HHXA160ARA151MF80G |
|                          | 270         | HA0       | 22                          | 1,700                                                      | HHXA160ARA271MHA0G |
|                          | 470         | JA0       | 18                          | 2,100                                                      | HHXA160ARA471MJA0G |
| 25                       | 56          | F61       | 50                          | 900                                                        | HHXA250ARA560MF61G |
|                          | 100         | F80       | 30                          | 1,400                                                      | HHXA250ARA101MF80G |
|                          | 220         | HA0       | 27                          | 1,600                                                      | HHXA250ARA221MHA0G |
|                          | 330         | JA0       | 20                          | 2,000                                                      | HHXA250ARA331MJA0G |
| 35                       | 47          | F61       | 60                          | 900                                                        | HHXA350ARA470MF61G |
|                          | 68          | F80       | 35                          | 1,400                                                      | HHXA350ARA680MF80G |
|                          | 150         | HA0       | 27                          | 1,600                                                      | HHXA350ARA151MHA0G |
|                          | 270         | JA0       | 20                          | 2,000                                                      | HHXA350ARA271MJA0G |
| 50                       | 22          | F61       | 80                          | 750                                                        | HHXA500ARA220MF61G |
|                          | 33          | F80       | 40                          | 1,100                                                      | HHXA500ARA330MF80G |
|                          | 68          | HA0       | 30                          | 1,250                                                      | HHXA500ARA680MHA0G |
|                          | 100         | JA0       | 28                          | 1,600                                                      | HHXA500ARA101MJA0G |
| 63                       | 10          | F61       | 120                         | 700                                                        | HHXA630ARA100MF61G |
|                          | 22          | F80       | 80                          | 900                                                        | HHXA630ARA220MF80G |
|                          | 33          | HA0       | 40                          | 1,100                                                      | HHXA630ARA330MHA0G |
|                          | 56          | JA0       | 30                          | 1,400                                                      | HHXA630ARA560MJA0G |
| 80                       | 22          | HA0       | 45                          | 1,100                                                      | HHXA800ARA220MHA0G |
|                          | 39          | JA0       | 35                          | 1,200                                                      | HHXA800ARA390MJA0G |

## ◆ RECOMMENDED REFLOW SOLDERING CONDITIONS


The following conditions are recommended for air convection and infrared reflow soldering on the SMD products on to a glass epoxy circuit boards by cream solder. The dimensions of the glass epoxy boards with resist are 90×50×0.8mm.

The temperatures shown are the surface temperature values on the top of the can and on the capacitor terminals.

Reflow should be performed twice or less.

Please ensure that the capacitor became cold enough to the room temperature (5 to 35°C) before the second reflow.

## ● Reflow Profile

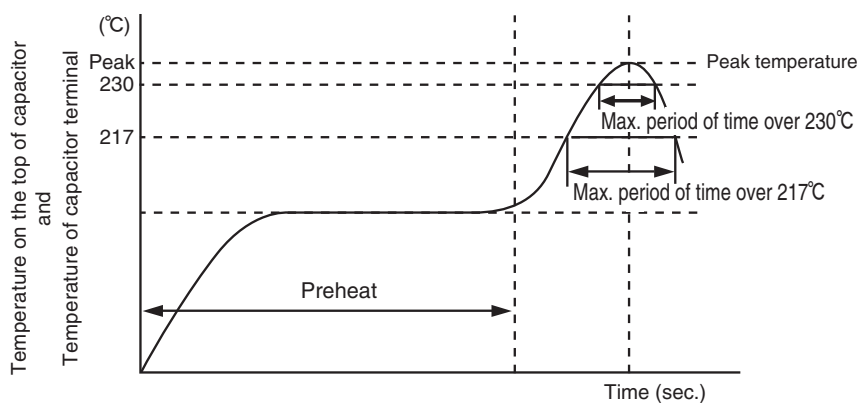

| Size Code | Preheat                       | Time maintained<br>above 217°C | Time maintained<br>above 230°C | Peak temp. | Reflow number   |
|-----------|-------------------------------|--------------------------------|--------------------------------|------------|-----------------|
| F61, F80  | 150 to 180°C<br>120 sec. max. | 50 sec. max.                   | 40 sec. max.                   | 260°C max. | 2-cycle allowed |
| HA0, JA0  |                               | 50 sec. max.                   | 40 sec. max.                   | 260°C max. | 1-cycle only    |
|           |                               |                                |                                | 245°C max. | 2-cycle allowed |

Please contact us for mass production schedule.  
Specifications in this bulletin are subject to change without notice.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)