



# Chip EMIFIL® LC Combined Type

## NFE31P Series (1206 Size)


### ■ Dimension

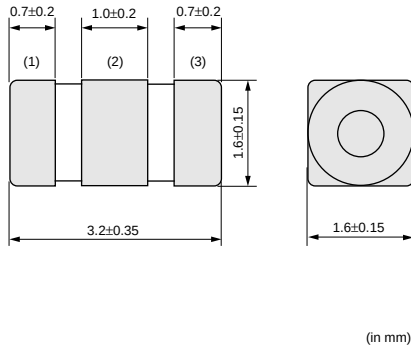

### ■ IL of Main Items

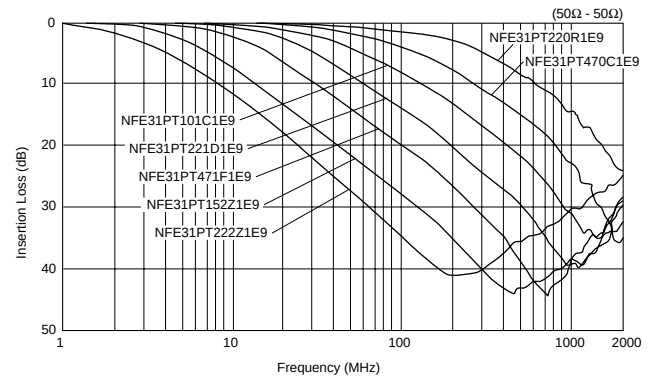

### ■ Equivalent Circuit

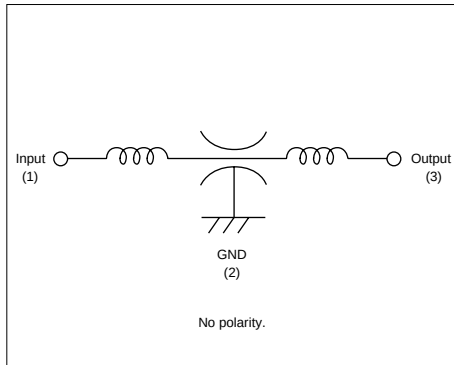

### ■ Packaging

| Code | Packaging          | Minimum Quantity |
|------|--------------------|------------------|
| L    | 180mm Plastic Tape | 2000             |
| K    | 330mm Plastic Tape | 8000             |
| B    | Bulk(Bag)          | 500              |

### ■ Rated Value (□: packaging code)

| Part Number     | Capacitance    | Rated Current | Rated Voltage | Insulation Resistance (min.) | Operating Temperature Range | Number of Circuit |
|-----------------|----------------|---------------|---------------|------------------------------|-----------------------------|-------------------|
| NFE31PT220R1E9□ | 22pF+30%-30%   | 6A            | 25Vdc         | 1000M ohm                    | -40°C to +85°C              | 1                 |
| NFE31PT470C1E9□ | 47pF+50%-20%   | 6A            | 25Vdc         | 1000M ohm                    | -40°C to +85°C              | 1                 |
| NFE31PT101C1E9□ | 100pF+80%-20%  | 6A            | 25Vdc         | 1000M ohm                    | -40°C to +85°C              | 1                 |
| NFE31PT221D1E9□ | 220pF+50%-20%  | 6A            | 25Vdc         | 1000M ohm                    | -40°C to +85°C              | 1                 |
| NFE31PT471F1E9□ | 470pF+50%-20%  | 6A            | 25Vdc         | 1000M ohm                    | -40°C to +85°C              | 1                 |
| NFE31PT152Z1E9□ | 1500pF+50%-20% | 6A            | 25Vdc         | 1000M ohm                    | -40°C to +85°C              | 1                 |
| NFE31PT222Z1E9□ | 2200pF+50%-50% | 6A            | 25Vdc         | 1000M ohm                    | -40°C to +85°C              | 1                 |

### ■ ⚠Caution/Notice

#### ⚠Caution (Rating)

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance .

#### Notice

Solderability of Tin plating termination chip might be deteriorated when low temperature soldering profile where peak solder temperature is below the Tin melting point is used. Please confirm the solderability of Tin plating termination chip before use.

● This data sheet is applied for CHIP EMIFIL® used for General Electronics equipment for your design.

**⚠ Note:****1. Export Control**

〈For customers outside Japan〉

Murata products should not be used or sold for use in the development, production, stockpiling or utilization of any conventional weapons or mass-destructive weapons (nuclear weapons, chemical or biological weapons, or missiles), or any other weapons.

〈For customers in Japan〉

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

**2. Please contact our sales representatives or product engineers before using the products in this data sheet for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage to a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this data sheet.**

- |                             |                                                                                                             |
|-----------------------------|-------------------------------------------------------------------------------------------------------------|
| ① Aircraft equipment        | ② Aerospace equipment                                                                                       |
| ③ Undersea equipment        | ④ Power plant equipment                                                                                     |
| ⑤ Medical equipment         | ⑥ Transportation equipment (vehicles, trains, ships, etc.)                                                  |
| ⑦ Traffic signal equipment  | ⑧ Disaster prevention / crime prevention equipment                                                          |
| ⑨ Data-processing equipment | ⑩ Application of similar complexity and/or reliability requirements to the applications listed in the above |

**3. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.****4. This data sheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and ⚠CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.****5. You are able to read a detailed specification in the website of Search Engine (<http://search.murata.co.jp/>) or catalog library (<http://www.murata.com/catalog/>) before to require our product specification or to transact the approval sheet for product specification.****6. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our data sheets. In this connection, no representation shall be made to the effect that any third parties are authorized to use the right mentioned above under licenses without our consent.****7. No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.**

● This data sheet is applied for CHIP EMIFIL® used for General Electronics equipment for your design.



**Murata Manufacturing Co., Ltd.**

<http://www.murata.com/>

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)