


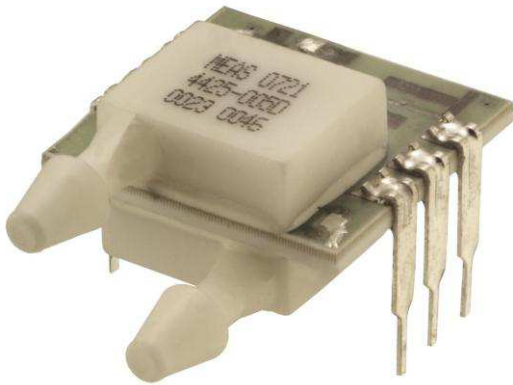

## MS4425

### SPECIFICATIONS

- ◆ PC Board Mountable Pressure Sensor
- ◆ 0-100 mV Output
- ◆ Voltage Excitation
- ◆ Differential, Gage, and Absolute
- ◆ Temperature Compensated

The MS4425 is a temperature compensated, piezoresistive silicon pressure sensor packaged in a dual-in-line configuration and intended for cost sensitive applications where excellent performance and long-term stability are required.

Integral temperature compensation is provided over a range of 0-50°C using laser-trimmed resistors. The pressure sensor is available in absolute, gage or differential pressure ranges from 0-1 to 0-300 psi. The pressure ports are 1/8" barbed ports which mate with 3/32" ID tubing. These tubes are parallel to the printed circuit board to allow other boards to be located above the sensor. For a vertical mounted tube in gage or absolute pressure, refer to the MS4426.

## FEATURES

Dual-in-Line Package  
0°C to 50°C Compensated  
Temperature Range  
±0.15% Pressure Non Linearity  
Solid State Reliability

## APPLICATIONS

Medical Instruments  
Altitude and Airspeed Measurements  
Process Control  
Factory Automation  
Leak Detection

## STANDARD RANGES

| Range    | psid | psig | psia |
|----------|------|------|------|
| 0 to 1   | +    | +    |      |
| 0 to 5   | +    | +    |      |
| 0 to 15  | +    | +    | +    |
| 0 to 30  | +    | +    | +    |
| 0 to 50  | +    | +    | +    |
| 0 to 100 | +    | +    | +    |
| 0 to 150 | +    | +    | +    |
| 0 to 300 | +    | +    | +    |

## PERFORMANCE SPECIFICATIONS

Supply Voltage: 12V


Ambient Temperature: 25°C (unless otherwise specified)

Pressure applied to Port 2

| PARAMETERS                               | MIN                                                                         | TYP   | MAX  | UNITS  | NOTES |
|------------------------------------------|-----------------------------------------------------------------------------|-------|------|--------|-------|
| Span (0-1 psi)                           | 17.6                                                                        | 18    | 18.4 | mV     | 1     |
| Span (0-5 psi)                           | 58                                                                          | 60    | 62   | mV     | 1     |
| Span (0-15 to 0-50 psi)                  | 88                                                                          | 90    | 92   | mV     | 1     |
| Span (0-100 & 0-300 psi)                 | 98                                                                          | 100   | 102  | mV     | 1     |
| Span (0-150 psi)                         | 148                                                                         | 150   | 152  | mV     | 1     |
| Zero Pressure Output                     | -1                                                                          | ±0.2  | 1    | mV     | 1     |
| Pressure Non Linearity (Gage & Absolute) | -0.15                                                                       |       | 0.15 | % Span | 2     |
| Pressure Non Linearity (Differential)    | -0.25                                                                       |       | 0.25 | % Span | 2     |
| Pressure Hysteresis                      | -0.20                                                                       | ±0.05 | 0.20 | % Span |       |
| Input Resistance                         | 5                                                                           | 15    | 25   | KΩ     |       |
| Output Resistance                        | 3500                                                                        | 5000  | 6500 | Ω      |       |
| Temperature Error – Span                 | -1                                                                          | 0.3   | 1    | % Span | 3     |
| Temperature Error – Zero                 | -0.75                                                                       | ±0.2  | 0.75 | mV     | 3     |
| Supply Voltage                           |                                                                             | 12    | 20   | V      |       |
| Long Term Stability (Offset & Span)      |                                                                             | ±0.1  |      | mV     | 4     |
| Pressure Overload (Differential)         |                                                                             |       | 3X   | Rated  | 5     |
| Common Mode Pressure                     |                                                                             |       | 400  | psi    |       |
| Compensated Temperature                  | 0                                                                           |       | 50   | °C     |       |
| Operating Temperature                    | -25                                                                         |       | 85   | °C     |       |
| Storage Temperature                      | -40                                                                         |       | 125  | °C     |       |
| Humidity                                 | 0                                                                           |       | 85   | % RH   |       |
| Weight                                   |                                                                             |       | 3    | grams  |       |
| Solder Temperature                       | 260°C Max 5 Sec.                                                            |       |      |        | 6     |
| Media                                    | Non-Corrosive Dry Gases Compatible with Silicon, Pyrex, RTV, Ceramic & Gold |       |      |        |       |


## Notes

1. Ratiometric to supply voltage.
2. Best fit straight line. Non linearity for 5 psi Differential devices is 0.75%.
3. Maximum temperature error between 0°C and 50°C with respect to 25°C. For errors beyond the compensated temperature, see Temperature Error Multiplier Chart below.
4. Long term stability over a one year period with constant voltage and temperature.
5. 3X or 400 psi max, whichever is less.
6. For more details refer to 4425/4426 Mounting Application Note.

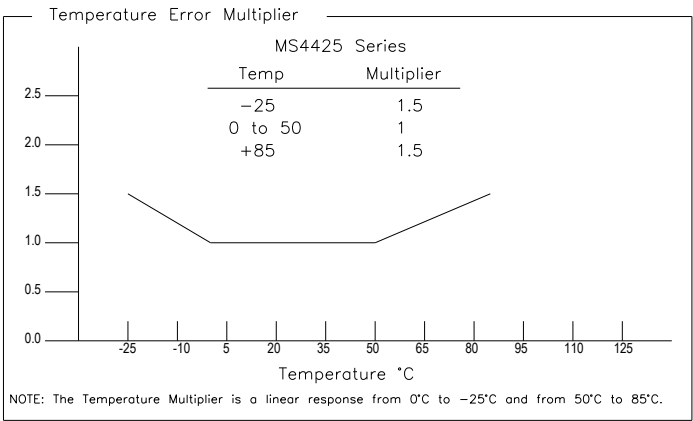


DIMENSION

DIMENSIONS ARE IN INCHES [mm]

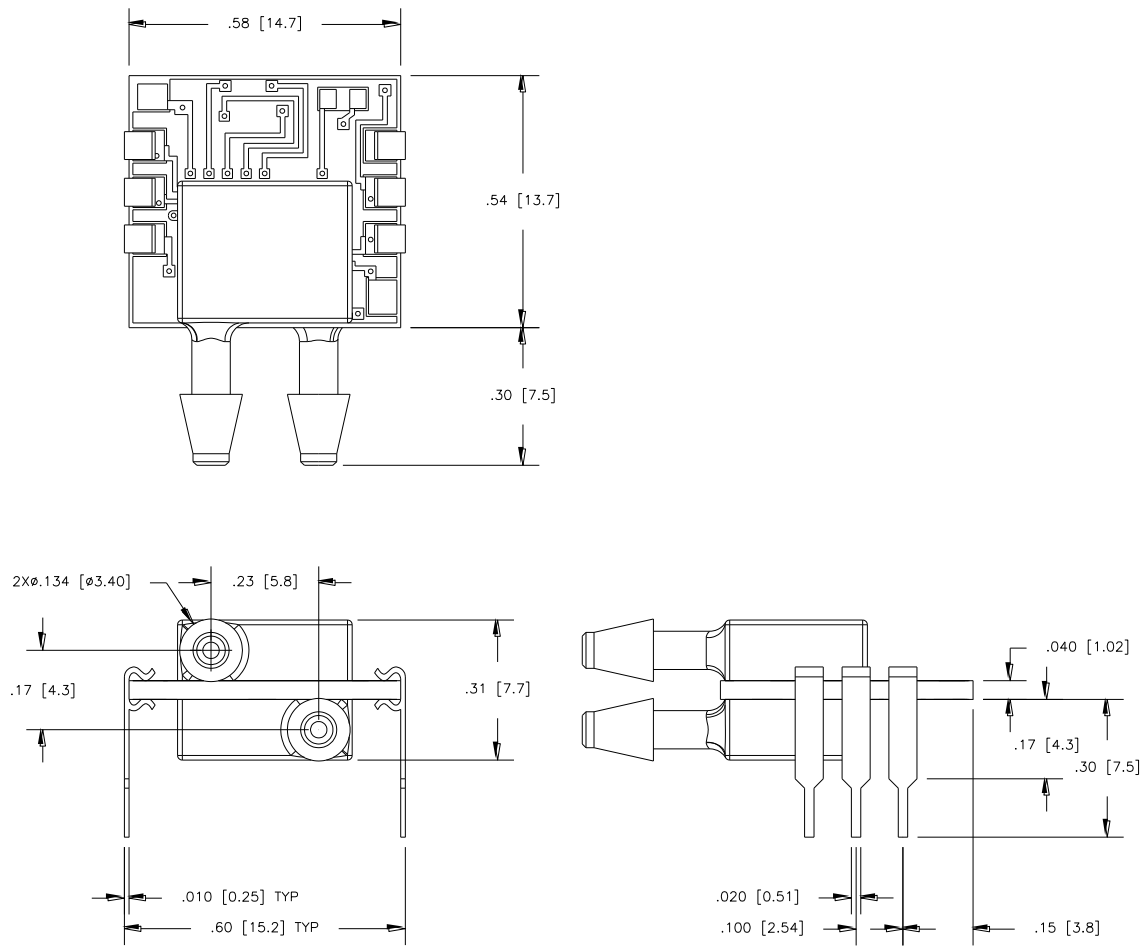


MS4425-xxxDy

DIMENSIONS ARE IN INCHES [mm]

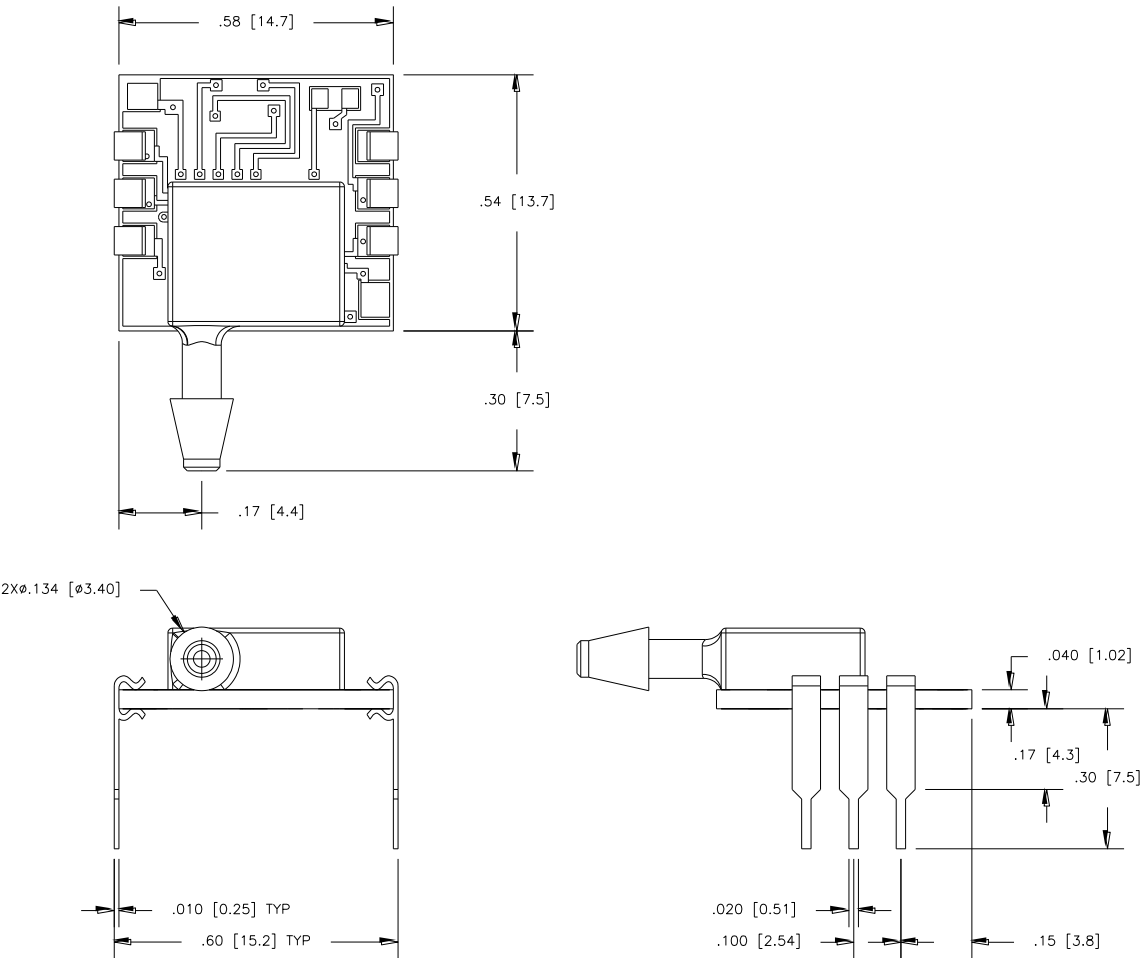


MS4425-xxxA/Gy

# CONNECTIONS


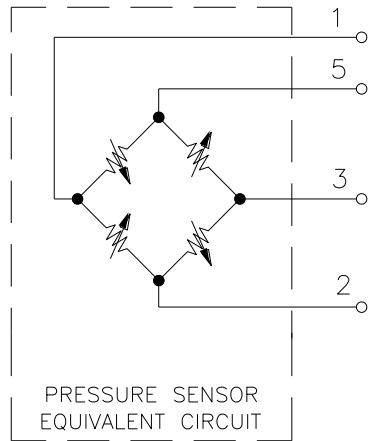


MS4425-XXXD

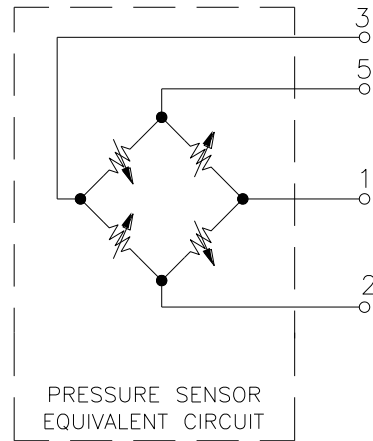


MS4425-XXXA/G

# PACKAGE STYLE, PINOUT, AND PORT DESIGNATION

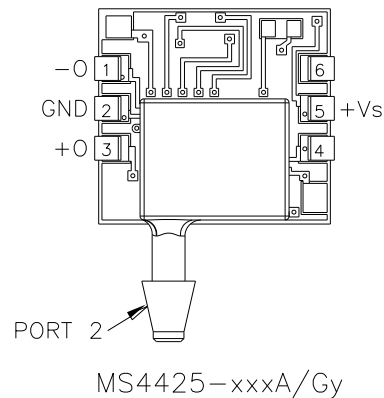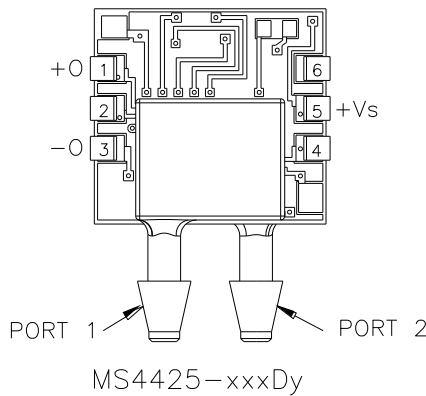

## ORDERING INFORMATION

4425 - 005 D F



Coating (F - Gel Fill, Blank = No Coating)

Type (D = Differential, A = Absolute, G = Gage)

Pressure Range

Model

**NORTH AMERICA**

Measurement Specialties, Inc.,  
a TE Connectivity company  
Tel: 800-522-6752  
Email: [customercare.frmt@te.com](mailto:customercare.frmt@te.com)

**EUROPE**

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Tel: 800-440-5100  
Email: [customercare.bevx@te.com](mailto:customercare.bevx@te.com)

**ASIA**

Measurement Specialties (China) Ltd.,  
a TE Connectivity company  
Tel: 0400-820-6015  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)