



## UDS1100-IAP Industrial Device Server

- In minutes, securely connect factory floor devices to enterprise systems
- Access, monitor and control equipment over Ethernet
- Replace dedicated PCs and/or modem lines with fast and reliable Ethernet networking
- Supports RS-232, RS-422 and RS-485 communications
- Includes Modbus TCP, ASCII, RTU and DF1 protocols
- 15KV serial ESD protection
- Wide -40° – 70°C operating temperature range
- Environmentally-friendly RoHS and WEEE-compliant

## Remotely Monitor, Manage and Control Industrial Equipment Over the Net

The UDS1100-IAP is a rugged and powerful tool which enables users to connect, manage and control just about any piece of industrial equipment from virtually anywhere over Ethernet or the Internet.

This single-port Device Server is a quick, simple and inexpensive way to bring the advantages of real-time or on-demand information access.

### Standards Based Communications

Using an open Ethernet architecture as a standard provides the flexibility for equipment to communicate to virtually any type of industrial device.

When used in conjunction with an OPC server, most Windows® based HMI, SCADA and PC-based control applications have full access to information in the industrial equipment networked by the UDS1100-IAP.

### Extending Communications Across the Globe

Our approach to network-enabling devices is transparent to your attached equipment and software so you won't need to change the way you work. Using a method called serial tunneling, the UDS1100-IAP encapsulates serial data into packets and transports it over Ethernet. Serial tunneling can be done in multiple ways:

- Using Lantronix supplied Com Port Redirector™ software, Windows device applications not designed for network communications are re-directed to communicate to devices connected to the UDS1100-IAP.
- Connecting two UDS1100-IAP Device Servers configured to automatically talk to each other over the network creates virtual serial connections that can extend serial communications across a facility or around the world.

### Built-in Web Server

The built-in web server enables users to access and configure the UDS1100-IAP from a standard web browser. Web pages enabling the UDS1100-IAP to be customized for unique applications can be built using Lantronix development tools. On-board Flash memory provides room for future system software upgrades and maintenance-free, nonvolatile web page storage.

### Easy to Set Up and Use

The UDS1100-IAP can be set up locally through its serial port, or remotely using Telnet or a web browser. The included DeviceInstaller™ Windows-based configuration software simplifies setup and provides an easy way to:

- Assign IP & other network specific addresses
- Load custom web pages
- Enable web-based configuration of the Device Server
- Ping or query the attached device(s) over the network
- View specific device data files
- Upgrade firmware
- Simplify process of installing industrial protocols

Complete with an auto MDI/MDIX Ethernet interface, the UDS1100-IAP is a powerful device communication solution that's perfect for your most demanding industrial applications.

### Modem Replacement

In modem emulation mode, the UDS is used to replace dial-up modems. The unit accepts modem AT commands on the serial port. It then establishes a network connection to the end device, leveraging network connections and bandwidth to eliminate dedicated modems and phone lines.

RoHS-compliant, the UDS1100-IAP meets Directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.



If you're looking for a transparent, cost-effective, and scalable means to network-enable your industrial automation equipment, look no further than the UDS1100-IAP.





## Features and Specifications

### Serial Interface

**Interface:** Software-selectable RS232, RS422 or RS485 (2 and 4 wire support)  
**Connectors:** 1 DB25F DCE serial port  
**Data Rates:** Software-selectable baud rate from 300 to 230 Kbaud  
**Characters:** 7 or 8 data bits  
**Parity:** odd, even, none  
**Stop Bits:** 1 or 2  
**Control Signals:** CTS/RTS (Hardware)  
**Flow Control:** XON/XOFF (Software)

### Network Interface

**Interface:** 10Base-T/100Base-TX Ethernet port  
**Software selectable Ethernet speed:** 10/100/Auto  
**Software selectable Half/Full/Auto duplex**  
**Connector:** RJ45  
**Standards:** ARP, UDP, TCP, ICMP, Telnet, TFTP, AutoIP, DHCP, HTTP, SNMP, TCP, UDP, and Telnet, TFTP

### Indicators (LED)

Power, 10/100 Link/Activity (green), 100/100 Link/Activity (green), Diagnostics (red), Status (green)

### Processor

**CPU:** Lantronix DSTNI-EX 48 MHz clock  
**Memory:** 256 KB zero wait state SRAM, 2 MB Flash

### Management

Lantronix DeviceInstaller GUI, Serial login, SNMP, Telnet login, HTTP

### Power

9-30 VDC or 9-24 VAC on barrel connector (1.5 Watts maximum consumption)  
 9-30 VDC on DB25F serial interface  
 3.3vdc on serial interface

### Environmental

**Operating:** -40° to 70° C (41° to 158° F)  
**Storage:** -40° to 85° C (-40 to 185° F)

### Packaging

**Material:** Metal enclosure with integrated wall mounts; optional 35 mm DIN-rail mount available  
**Dimensions (LxWxH):** 9.0 x 6.4 x 2.3 cm (3.5 x 2.5 x 0.9 in)  
**Weight:** 0.20 kg (0.45 lb)  
**IP Rating:** 30

### Agency Approvals

UL, CSA, FCC, CE, TUV, CTick, VCCI

### Warranty

2-year limited warranty

### Shipping Dimensions

**Dimensions (LxWxH):** 242 x 191 x 115 mm (9.5 x 7.5 x 4.5 in)  
**Weight:** 1.5 kg (3.0 lbs)


### Included Software

Windows® 98/ME/NT/2000/XP-based DeviceInstaller configuration software, Com Port Redirector™ software and related utilities

## UDS1100-IAP Example Configurations


A

### SERIAL TUNNELING CONFIGURATION

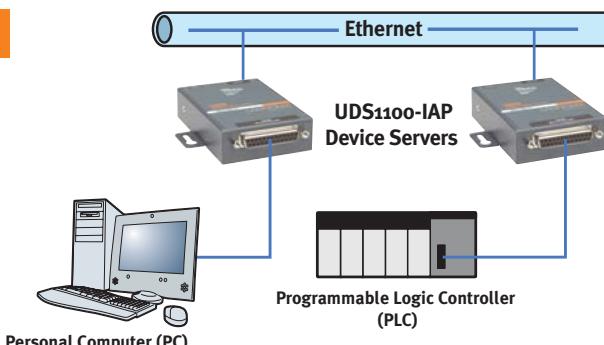

B

### DIRECT TCP/IP OR REDIRECTOR CONFIGURATION

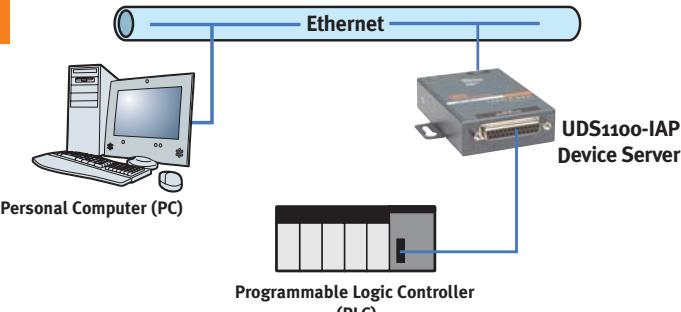

### Emissions

FCC Part 15 Subpart B Class A Radiated Emissions 30MHz – 1000MHz  
 ICES-003 Issue 4 February 2004 Class A Radiated Emissions 30MHz – 1000MHz  
 AS/NZS CISPR 22: 2004 Class A Radiated Emissions 30MHz – 1000MHz  
 EN55022: 1998 + A1: 2000 + A2: 2003 Class A Radiated Emissions 30MHz – 1000MHz  
 VCCI V-3/2005.04 Class A Radiated Emissions 30MHz – 1000MHz  
 EN61000-3-2: 2000 Class A Harmonic Current Emissions  
 EN61000-3-3: 1995 + A1: 2001 Fluctuations and Flicker

### Immunity

EN55024: 1998 +A1: 2001 +A2: 2003  
 IEC\_61000-4-2: 1995 ESD 8KV Air Discharge (Direct), 4KV Contact Discharge (Direct/Indirect)  
 IEC\_61000-4-3: 1995 Radiated Immunity 3.0V/m, 1KHz AM Sine Wave at 80%  
 IEC\_61000-4-4: 1995 EFT/Burst 1.0KV Power Lines, 0.5KV I/O Lines  
 IEC\_61000-4-5: 1995 Surge Immunity 1.0KV Common Mode, 1.0 KV Differential Mode  
 IEC\_61000-4-6: 1996 Conducted Immunity 3.0 Vrms, 80% AM Modulated (1KHz)  
 IEC\_61000-4-8: 1993 Magnetic Field Immunity 50Hz 1.0 Arms/m  
 IEC\_61000-4-11: 1994 Voltage Dips and Interrupts (>95%, 0.5 periods), (30%, 25 periods), (>95%, 250 periods)

### Isolation

Designed with protection against transients and ESD for use under harsh environments.  
**Serial Port:** 15 KV ESD protection on RS232 and RS422/485 transceivers  
**Power Input:** Up to non-repeated 600 W 10/100 usec pulse protection against transient over voltages  
**Ethernet Port:** 1500 VAC isolation shielded with shield connected to chassis ground for signal integrity and ESD protection

### Ordering Information

#### Part Number

UD1100I-A2-01

#### Description

UDS1100-IAP Device Server, 100-240 VAC International power supply with regional adapters, includes 500-163 cable and ACDIN1001-01 Din rail mount

#### Accessories

500-163	DB25M to DB9F serial cable (included)
ACDIN1001-01	Optional DIN-rail mount (included)
500-171-R	DB25M to RS485 and power input screw terminal adapter (order separately)

**LANTRONIX®**

15353 Barranca Parkway | Irvine | CA 92618 | USA | Tel: 800.422.7055 | Fax: 949.450.7232 | [www.lantronix.com](http://www.lantronix.com)

©2006, Lantronix, Inc. Lantronix is a registered trademark, and Device Server, DeviceInstaller and Com Port Redirector are trademarks of Lantronix, Inc. All other trademarks are the property of their respective owners. Specifications subject to change without notice. All rights reserved. 910-502 09/06 DGS2500

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru