
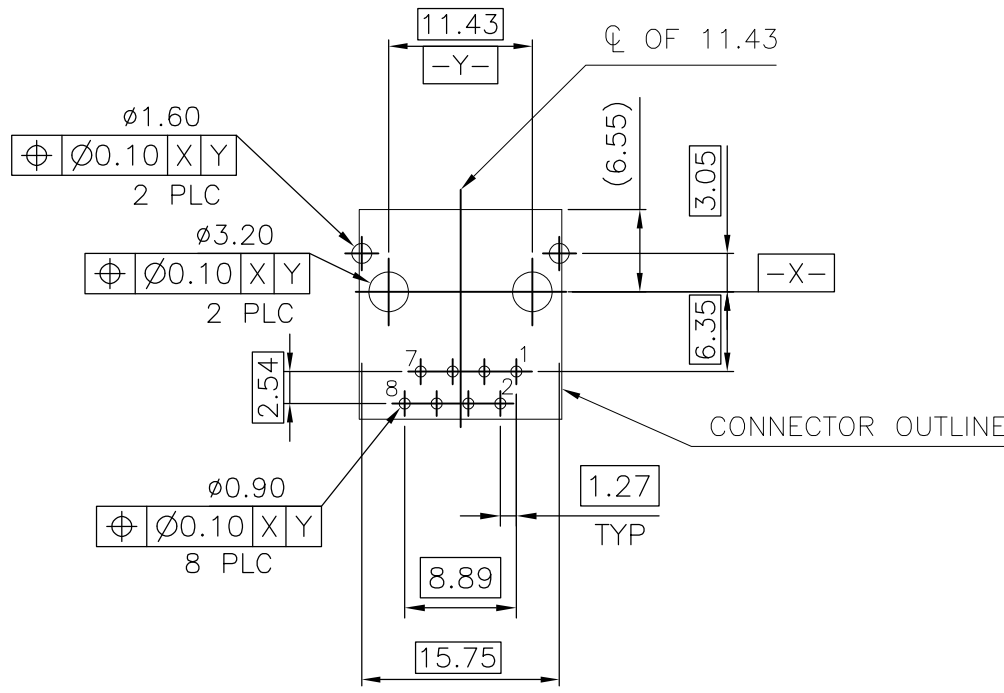
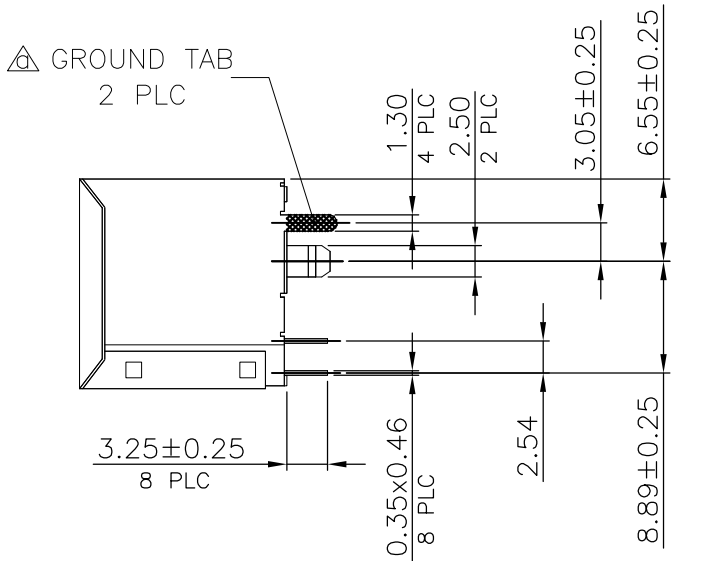


THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.


MODULAR JACK WITHOUT LED

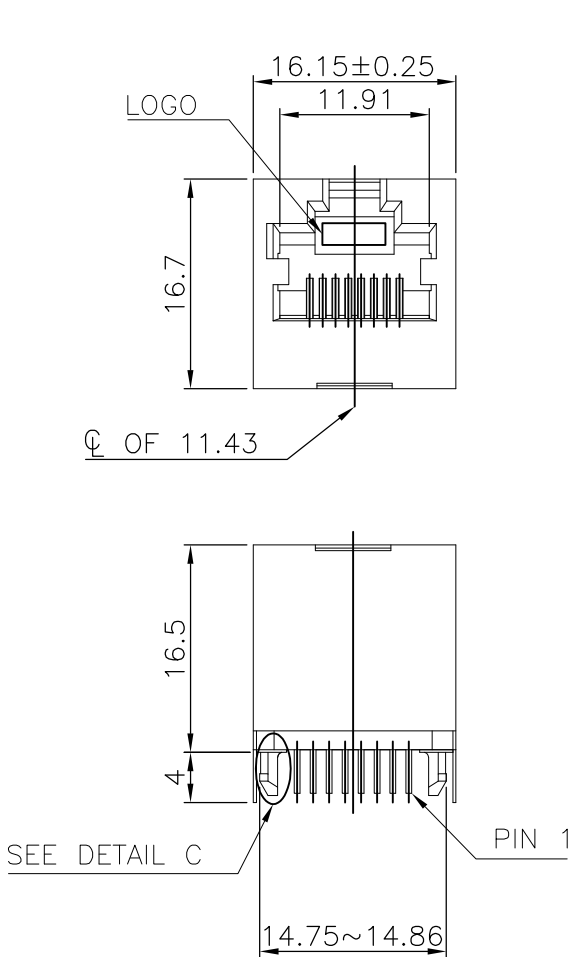

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05 (TOP VIEW)

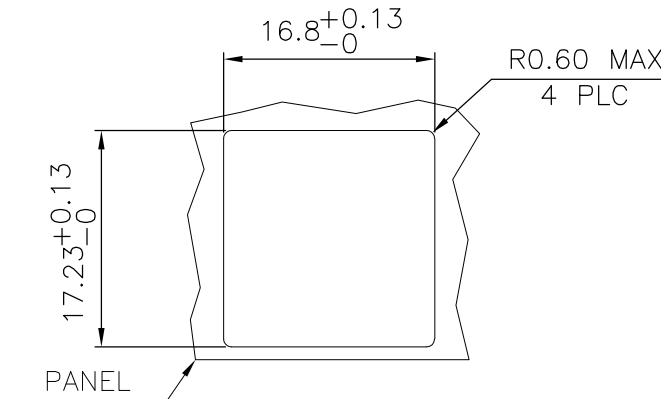

RECOMMENDED SUGGESTED PANEL CUTOUT

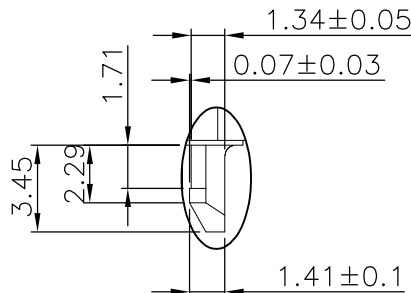

DETAIL C (SCALE 2:1)

NOTE:

1. MATERIAL:

HOUSING: PA46, WITH 30% GF, UL94 V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: BRASS.

2. FINISH:

CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
GOLD FLASH ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED
1.27μm [50μ"] MIN. NICKEL.
SHELL: 0.508μm [20μ"] MIN. NICKEL PLATED.



POST DIPPED WITH TIN ON PCB GROUND TABS.

3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.

4. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

1.27μm [50μ"]	3-1734577-5
1.27μm [50μ"]	3-1734577-4
0.762μm [30μ"]	3-1734577-3
0.381μm [15μ"]	3-1734577-2
0.152μm [6μ"]	3-1734577-1
MIN. GOLD THICKNESS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING 21JUL2009	TE Connectivity		
DIMENSIONS: mm		CHK S. CHIEN 21JUL2009			
		APVD W. KODAMA 21JUL2009	NAME		
		PRODUCT SPEC 108-57527	MODULAR JACK CONNECTOR RJ45, 8P8C, VERTICAL, DIP TYPE.		
MATERIAL SEE NOTE		FINISH SEE NOTE	SIZE A3	CAGE CODE 00779	DRAWING NO C-1734577
		WEIGHT 6.7 GRAMS	RESTRICTED TO		
		CUSTOMER DRAWING	SCALE 1:1	SHEET 2 of 5	REV D

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -





ALL RIGHTS RESERVED.

REVISIONS



P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

LED SCHEMATIC	
LED1	LED2
GREEN	YELLOW
9-  +10	11-  +12

MODULAR JACK WITH LED

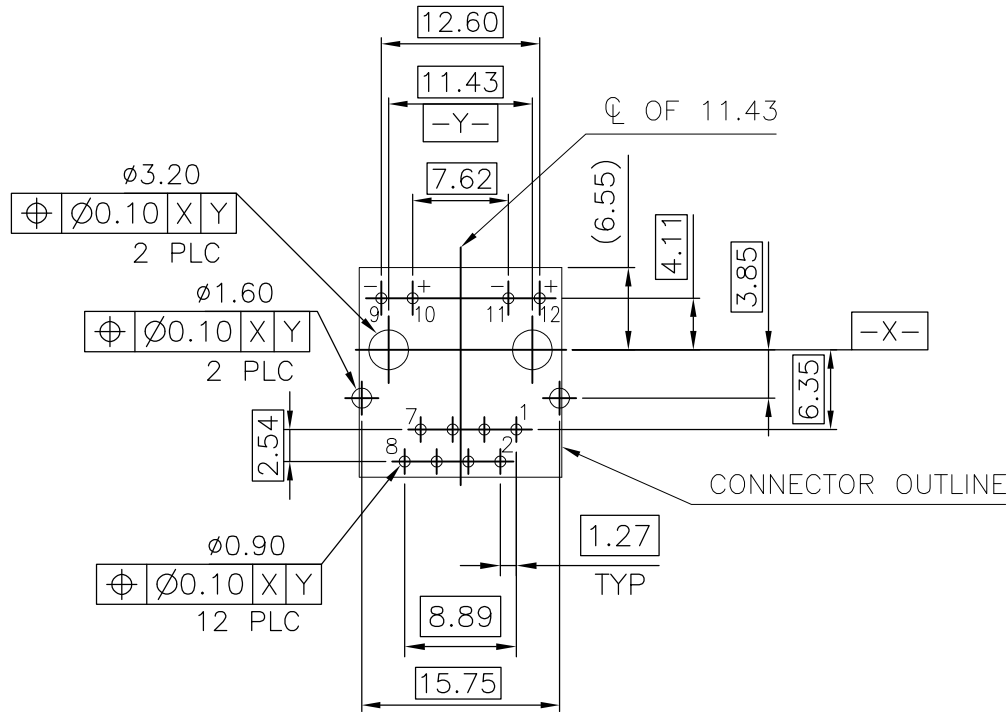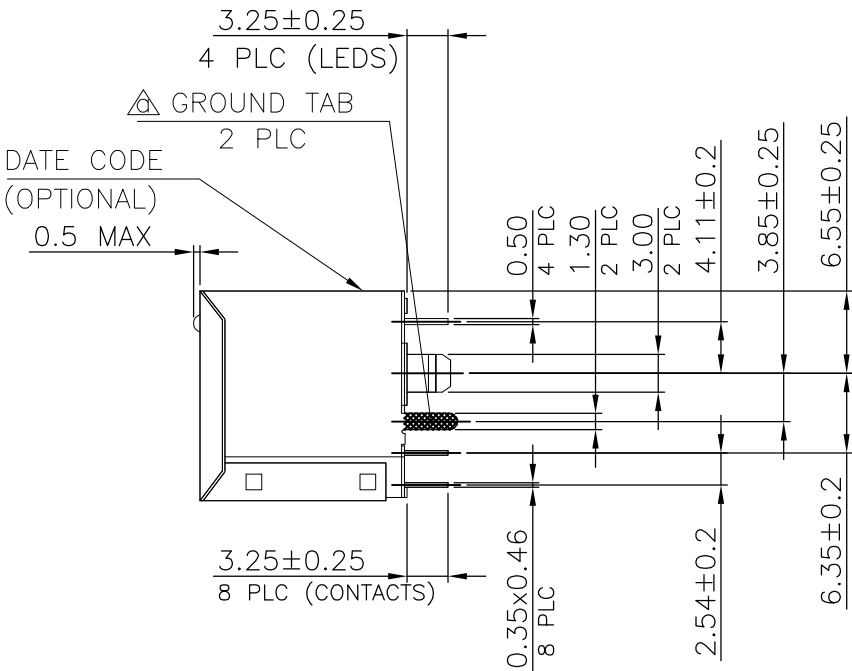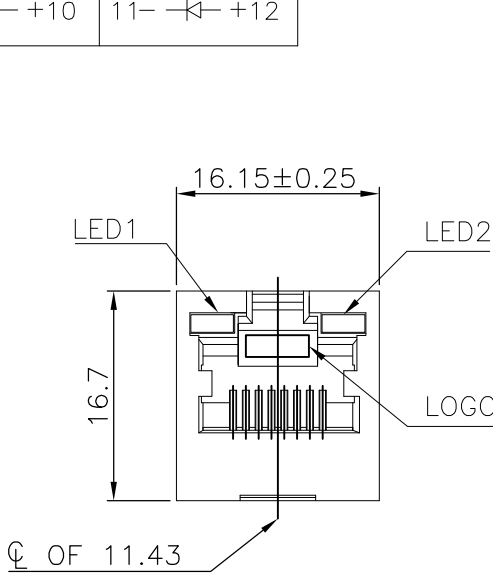


RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05 (TOP VIEW)

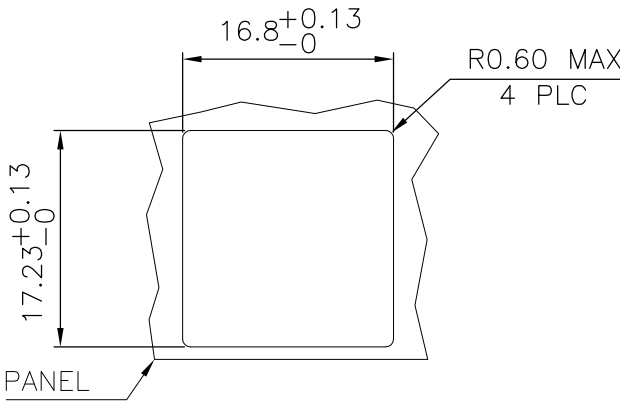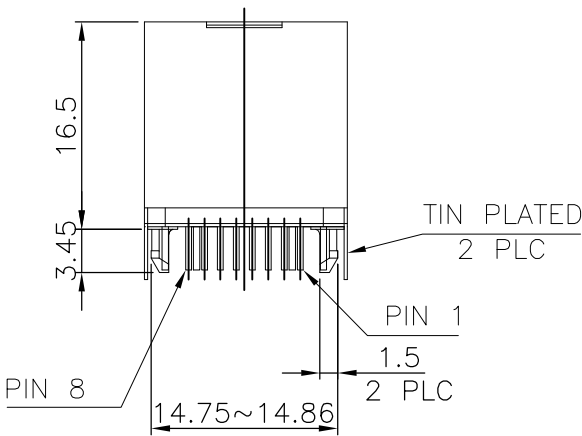


RECOMMENDED SUGGESTED PANEL CUTOUT

- NOTE:
- MATERIAL:
 - HOUSING: PA46, WITH 30% GF, UL94 V-0, BLACK COLOR.
 - CONTACTS: PHOSPHOR BRONZE.
 - SHELL: BRASS.
 - LED SOLDER TAIL: STEEL.
 - FINISH:
 - CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL AREA, 1.27um [50u"] MIN. NICKEL UNDERPLATING OVERALL. SHELL: 0.508um [20μ"] MIN. NICKEL PLATED. a POST DIPPED WITH TIN ON PCB GROUND TABS. LED SOLDER TAIL: 2.032um [80μ"] MIN. BRIGHT-TIN PLATED.
 - LED MUST BE REFLOW COMPATIBLE TO FOLLOWING TEMPERATURE PROFILE (FOR 1 CYCLE): ABOVE 160°C FOR 120 SECONDS, PEAKING AT 245°C FOR 20~40 SECONDS.
 - LED DEFECT RATE IS 6000PPM MAX. AFTER IR REFLOW PROCESS AS NOTE 3.
 - WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.
 - OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

YELLOW	GREEN	0.762μm [30μ"]	7-1734577-3
LED2	LED1	MIN. GOLD THICKNESS	PART NUMBER
INDICATOR COLOR			


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING 21JUL2009	 TE Connectivity	
		CHK S. CHIEN 21JUL2009		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD W. KODAMA 21JUL2009	NAME MODULAR JACK CONNECTOR RJ45, 8P8C, VERTICAL, DIP TYPE.	
		PRODUCT SPEC		
	0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	APPLICATION SPEC	SIZE A3	CAGE CODE 00779
		WEIGHT -		
MATERIAL SEE NOTE	FINISH SEE NOTE	CUSTOMER DRAWING	DRAWING NO C-1734577	RESTRICTED TO -
		SCALE 1:1	SHEET 3 of 5	REV D

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

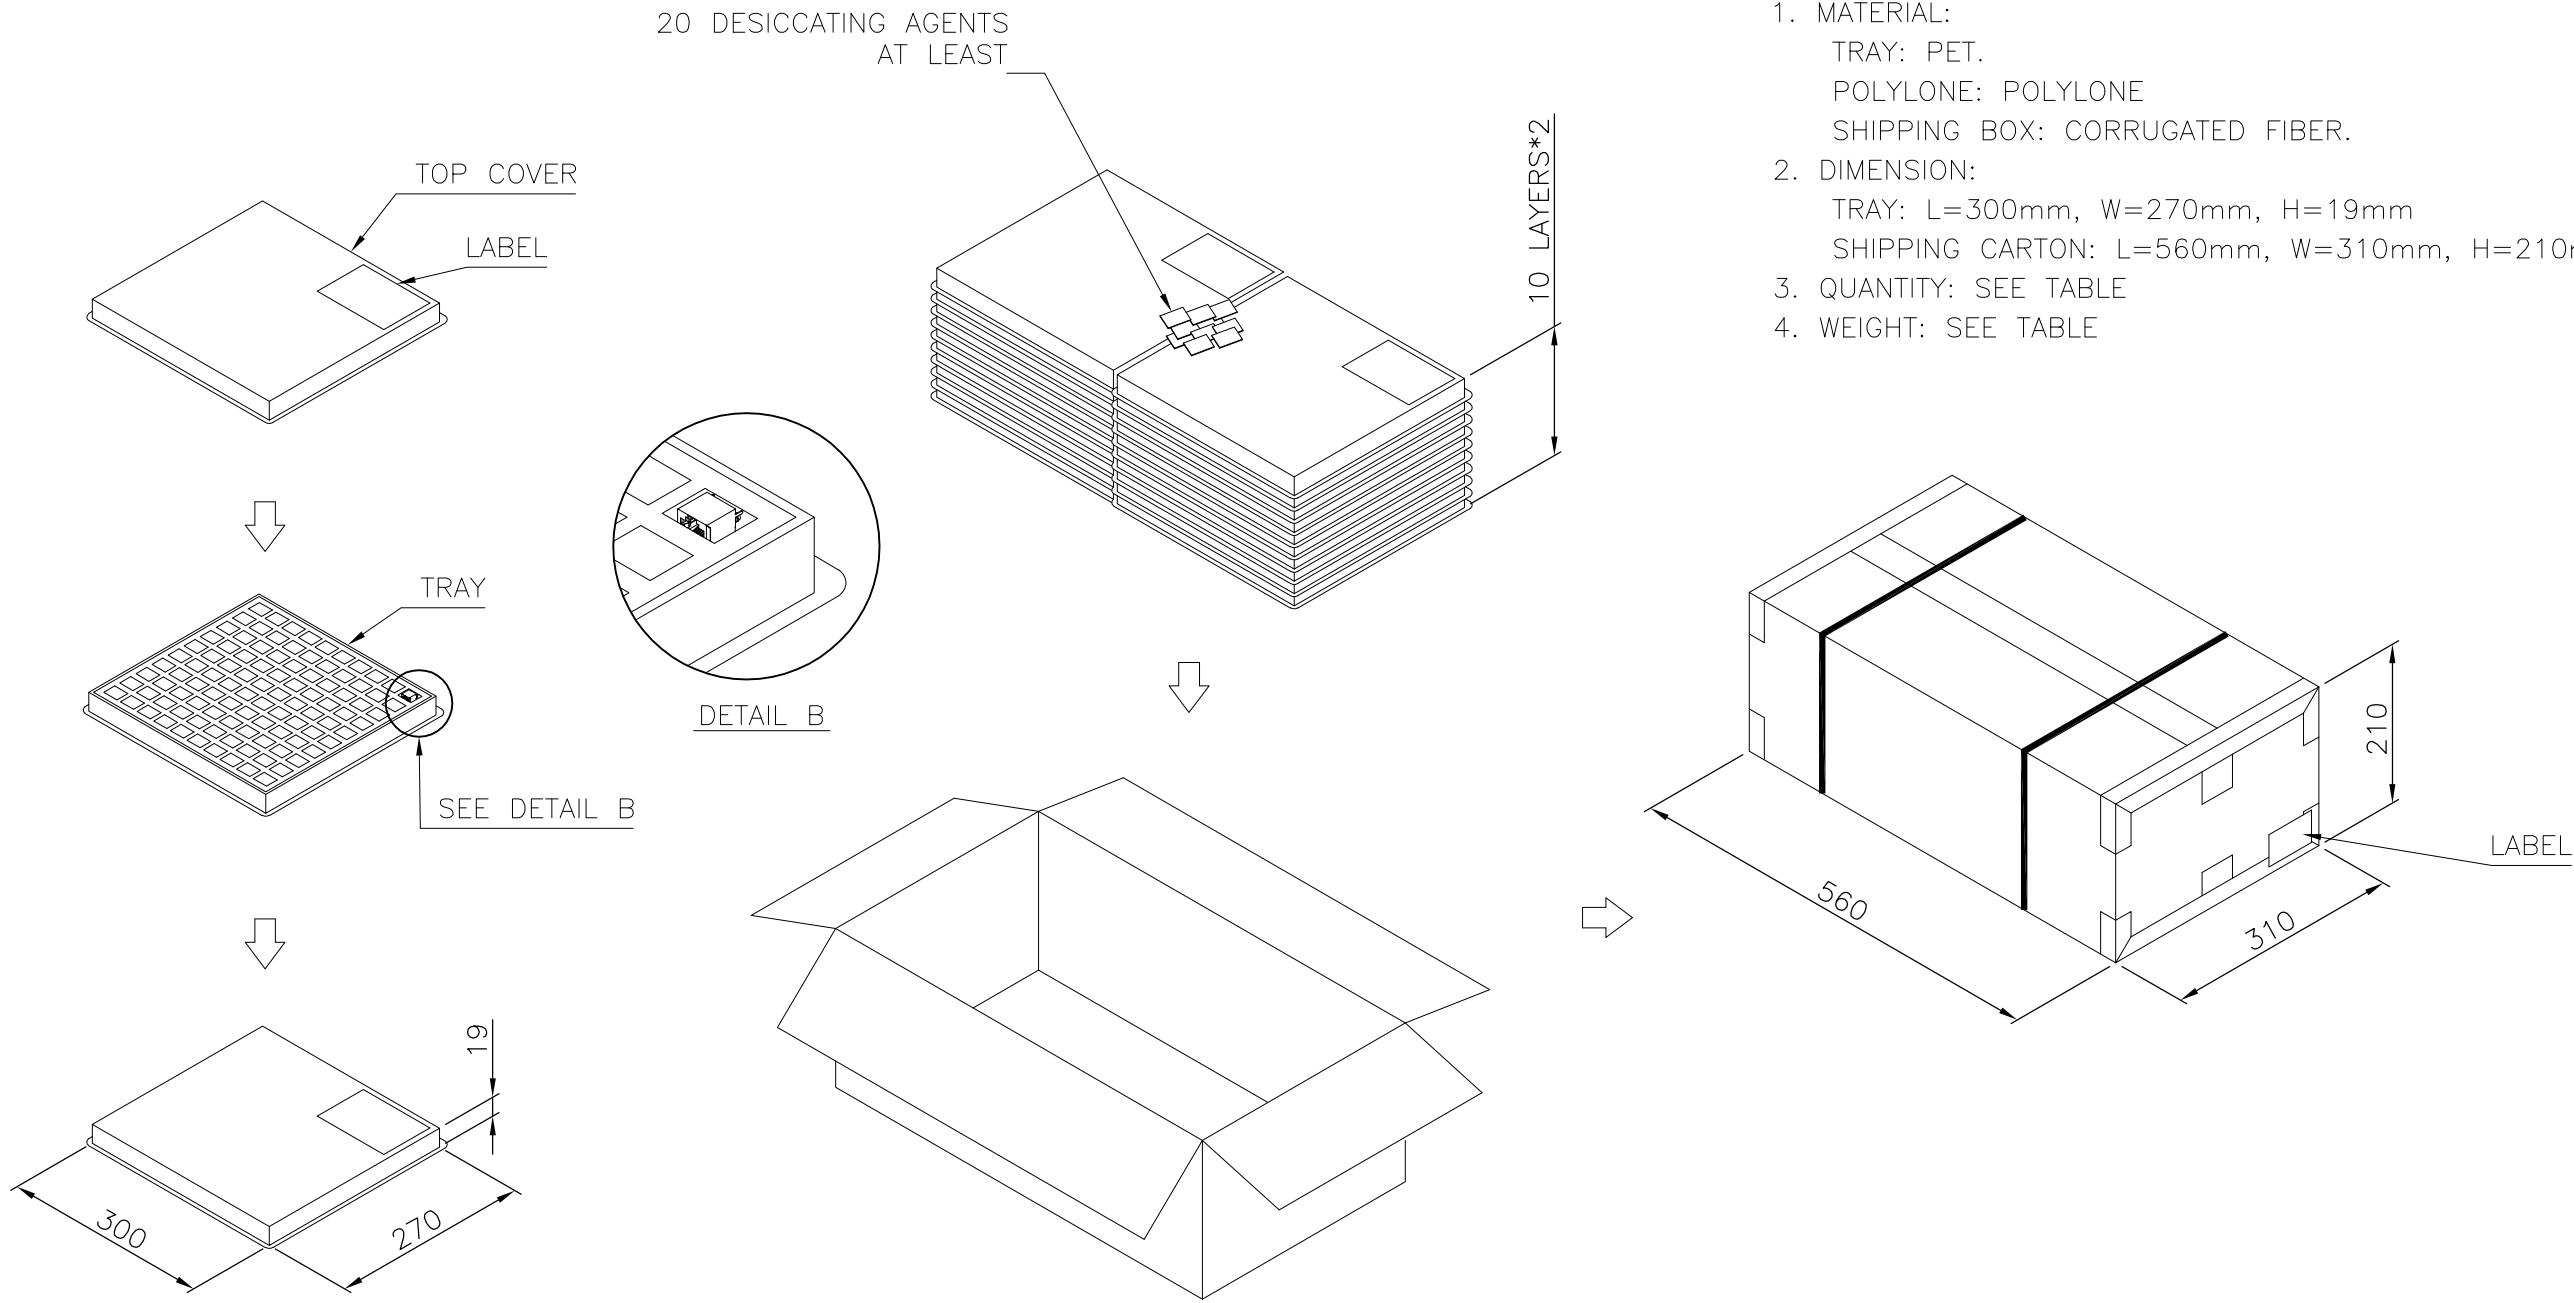


- NOTES:
- MATERIAL:
TRAY: PET.
POLYLONE: POLYLONE
SHIPPING BOX: CORRUGATED FIBER.
 - DIMENSION:
TRAY: L=300mm, W=270mm, H=19mm
SHIPPING CARTON: L=560mm, W=310mm, H=210mm
 - QUANTITY: SEE TABLE
 - WEIGHT: SEE TABLE

15 KG	13.3 KG	100	20	2000
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ BOX	PCS/ BOX

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING	21JUL2009	 TE Connectivity										
		CHK S. CHIEN	21JUL2009											
		APVD W. KODAMA	21JUL2009											
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME MODULAR JACK CONNECTOR RJ45, 8P8C, VERTICAL, DIP TYPE.										
		0 PLC ± -												
		1 PLC ± 0.3												
		2 PLC ± 0.2												
		3 PLC ± 0.15												
		4 PLC ± -												
		ANGLES ± 3°												
MATERIAL		FINISH		SIZE			CAGE CODE	DRAWING NO		RESTRICTED TO				
SEE NOTE		SEE NOTE		A3			00779	C-1734577		—				
CUSTOMER DRAWING						SCALE		1:1		SHEET	4 OF 5		REV	D


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

PACKAGE ONLY FOR 6-1734577-3

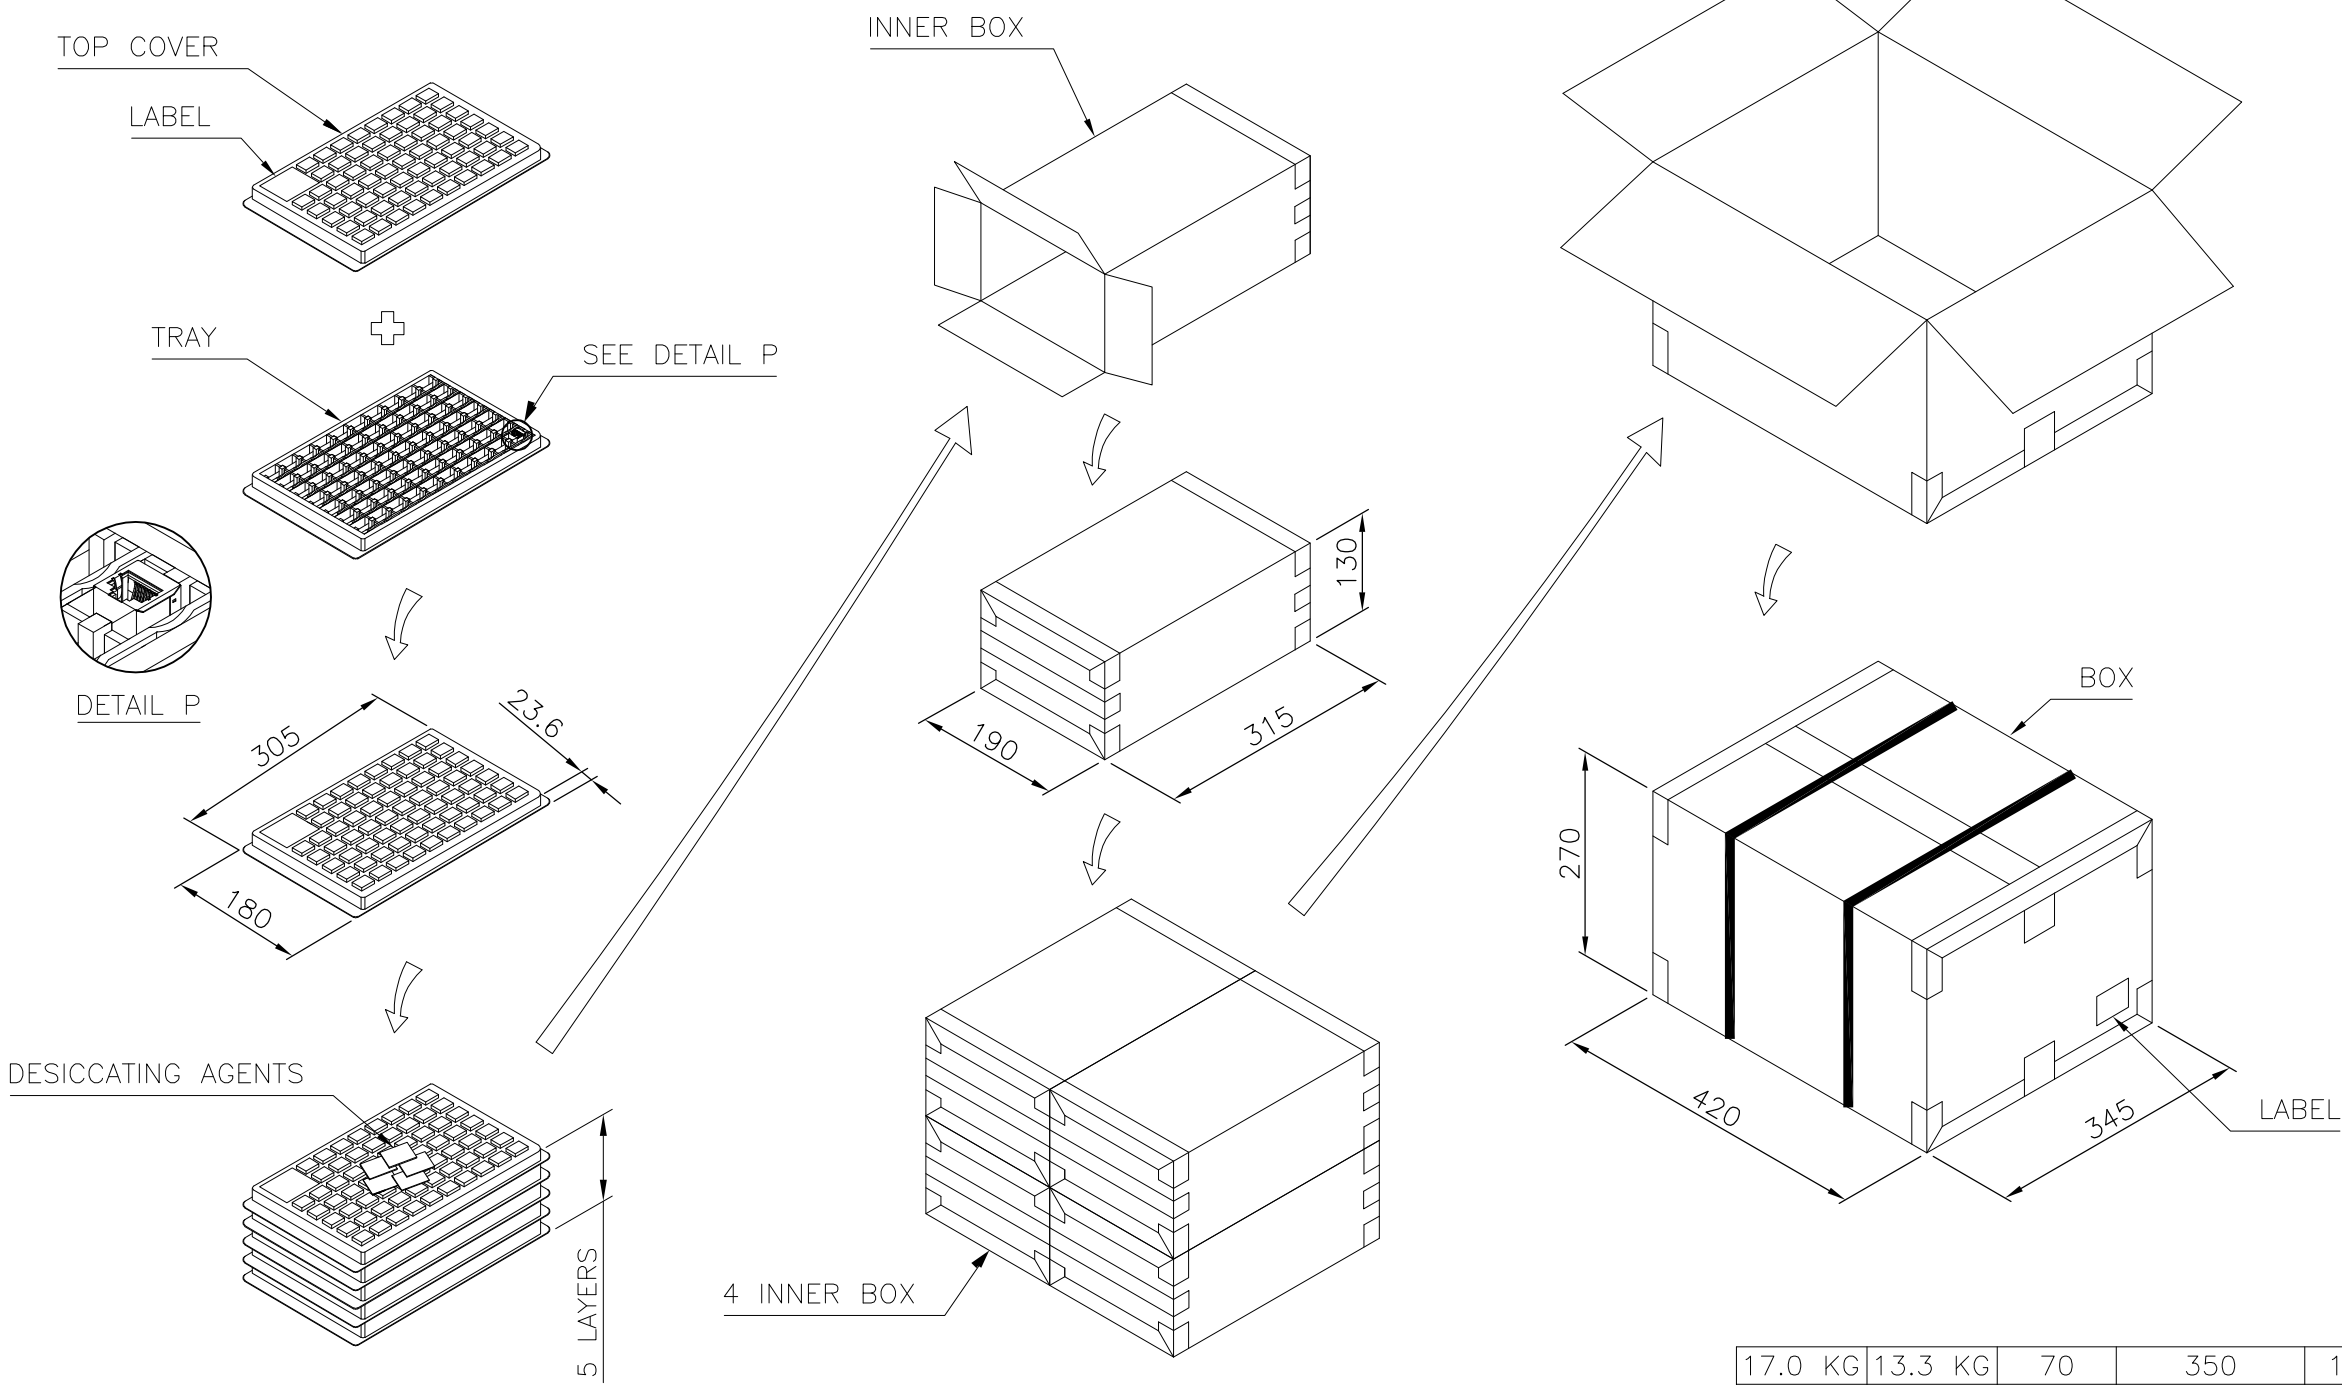

- NOTES:
- MATERIAL:
TRAY: PET.
POLYLONE: POLYLONE
BOX: CORRUGATED FIBER.
 - DIMENSION:
TRAY: L=308mm, W=180mm, H=23.6mm
INNER BOX: L=315mm, W=190mm, H=130mm
BOX: L=420mm, W=345mm, H=275mm
 - QUANTITY: SEE TABLE
 - WEIGHT: SEE TABLE

17.0 KG	13.3 KG	70	350	1400	6-1734577-3
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ INNER BOX	PCS/ BOX	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING 21JUL2009		TE Connectivity				
		CHK S. CHIEN 21JUL2009						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± — ANGLES ± 3°		NAME				
				MODULAR JACK CONNECTOR RJ45, 8P8C, VERTICAL, DIP TYPE.				
				PRODUCT SPEC				
				APPLICATION SPEC				
				WEIGHT				
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
SEE NOTE		SEE NOTE		A3	00779	C-1734577	—	
CUSTOMER DRAWING						SCALE	SHEET	REV
						1:1	5 of 5	D

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru