


## LLC5 SERIES

### Liquid Level Controls



8-PIN

### Wiring Diagram

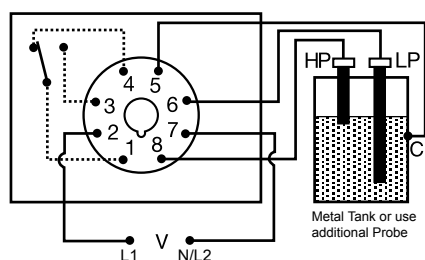

HP = HIGH LEVEL PROBE  
LP = LOW LEVEL PROBE  
C = PROBE COMMON  
V = VOLTAGE

Relay contacts are isolated.  
Connect common to  
conductive tank. Additional  
probe is necessary for non-  
conductive or insulated tanks.

### Description

The LLC5 provides dual probe conductive liquid level control in a convenient octal plug-in package. Models are available for fixed fill or drain operation. Isolated, pulsed DC voltage on the probes prevents electrolytic plating. Less than 1 mA of current is used to sense the presence of conductive liquid between the probes and common. On adjustable units, the sensitivity adjustment eliminates false tripping caused by floating debris and foaming agents.

### Operation

**Drain (Pump-Down Mode):** When the liquid level rises and touches the high level probe, the output relay and LED energize and remain energized until the liquid level falls below the low level probe. The output relay and LED de-energize and remain de-energized until the liquid rises and touches the high level probe.

**Fill (Pump-Up Mode):** When the liquid level falls below the low level probe, the output relay and LED energize and remain energized until the liquid level rises and touches the high level probe. The output relay and LED de-energize and remain de-energized until the liquid level again falls below the low level probe.

### Features & Benefits

FEATURES	BENEFITS
<b>Unique Probe Protection logic</b>	Probes are protected from scale build up through pulsed DC signal between the probes.
<b>LED status indicator</b>	Visual indication of relay engagement in pump-up or pump-down activity
<b>Isolated 5A SPDT contacts</b>	Allows control of loads for AC voltage

### Ordering Information

MODEL	LINE VOLTAGE	DESCRIPTION
LLC52AA	24VAC	For Drain (pump-down) operation with adjustable sense resistance
LLC52BA	24VAC	For Fill (pump-up) operation with adjustable sense resistance
LLC54AA	120VAC	For Drain (pump-down) operation with adjustable sense resistance
LLC54AAS	120VAC	For Drain (pump-down) operation with adjustable sense resistance and reverse connection (#8 low, #6 high)
LLC54AF10	120VAC	For Drain (pump-down) operation with fixed sense resistance of 10 kΩ
LLC54BA	120VAC	For Fill (pump-up) operation with adjustable sense resistance
LLC54BAS	120VAC	For Fill (pump-up) operation with adjustable sense resistance and reverse connection (#8 low, #6 high)
LLC56AA	230 VAC	For Drain (pump-down) operation with adjustable sense resistance

### Accessories



#### BZ1 Front Panel Mount Kit

Provides an easy method of through-the-panel mounting of 8- or 11-pin plug-in timers, flashers, and other controls.



#### NDS-8 Octal 8-pin Socket

8-pin 35mm DIN rail or surface mount. Rated at 10A @ 300VAC. Surface mounted with two #6 (M 3.5 x 0.6) screws or snaps onto a 35 mm DIN rail. Uses PSC8 hold-down clips.



#### PSC8 Hold-down Clips

Securely mounts plug-in controls in any position. Provides protection against vibration. Use with NDS-8 Octal Socket. Sold in pairs.

**Note:** use of the PSC8 clips partly covers the LED window of the LLC5 unit. Use of alternative socket base P1011-6 with its corresponding hold down clips PSCRB8 do not cover up the LED window, but the socket base is not DIN rail mountable.

If you don't find the part you need, call us for a custom product 800-843-8848

## LLC5 SERIES

### Accessories



#### PHST-38QTN Electrode

Designed for a maximum steam pressure of 240 PSI; 400° F. UL353 Recognized.



#### LLP-24 Threaded Probe (24")

Threaded stainless steel probe measuring 24" (61 cm) long. For use with PHST-38QTN liquid level control electrodes.

### Specifications

#### Control

##### Type

Resistance sensing for high & low level detection of conductive liquids  
Pulsed DC at probe terminals  
Factory fixed or adjustable to 100K $\Omega$

##### Sensing Voltage

##### Sensing Resistance

##### Sensing Resistance

##### Tolerance

Adjustable: 1K  $\pm$ 500 $\Omega$  at low end;  
100K $\Omega$   $\pm$ 25%, 0% at high end  
Factory fixed:  $\pm$ 10% or 500 $\Omega$  whichever is greater

Debounce time delay <1s

#### Response Time

##### Input

##### Tolerance

##### 24VAC

-15%, +20%

##### 120 & 230VAC

-20%, +10%

##### AC Line Frequency

50/60 Hz

#### Output

##### Type

Electromechanical relay

##### Form

Isolated, SPDT

##### Rating

5A resistive @ 240VAC, 1/10 hp @ 240VAC

#### Protection

##### Isolation Voltage

$\geq$  1500V RMS between input, output, & probe

#### Mechanical

##### Mounting

Plug-in socket

##### Dimensions

**H** 60.7 mm (2.39"); **W** 45.2 mm (1.78");

**D** 76.5 mm (3.01")

#### Termination

Octal 8-pin plug-in

#### Environmental

##### Operating/Storage

##### Temperature

-20° to 60°C / -40° to 80°C

##### Weight

6 oz (170 g) approx.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)