REVISION					
ZONE	LTR	ECN	DESCRIPTION	DATE	APPR.
	H	42790	REDRAWN, ADD CONTACT HEIGHT	1/25/05	[illegible]

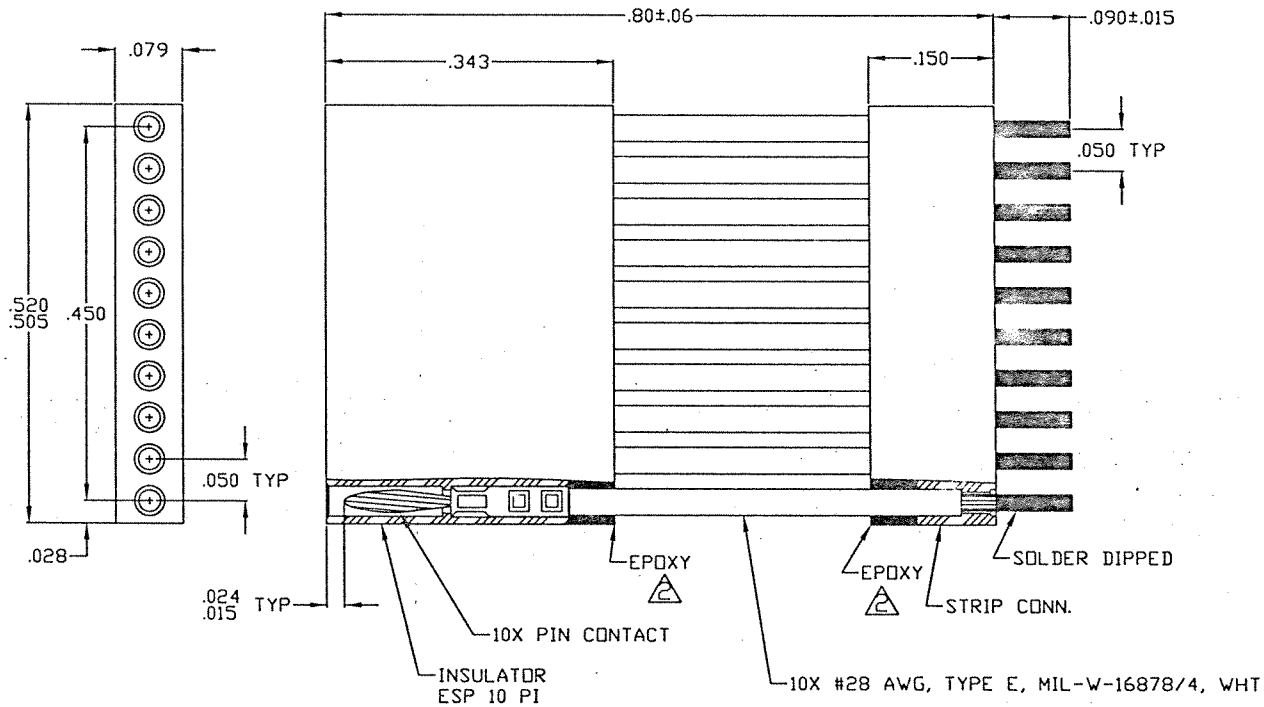

NOTES: UNLESS OTHERWISE SPECIFIED

1. MARK PER TPD.

2. POTTING COMPOUND USED IS 194-8102-6215/6225.

3. CRIMP LEADS INTO CONTACTS PER ELCO CONTACT PROCEDURE.

ITEM NO.	PART NUMBER	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	QTY REQ'D

PARTS LIST

DIMENSIONS ARE INCHES.
TOLERANCES ARE:
.XX ±.01 .XXX ±.005 ANG ±2°
BREAK EDGES: .005 MAX

MATERIAL:

FINISH:

SURFACE AREA: (SQ. INCHES)

APPROVALS	DATE
DRAWN W. ARAI	1/24/05
P.E.	

THIS INFORMATION IS CONFIDENTIAL AND PROPERTY TO TYCO ELECTRONICS CORPORATION AND ITS WORLD WIDE SUBSIDARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA

tyco Electronics
Microdot Connectors Division
306 Pasadena Avenue
South Pasadena, CA91030

STRIP CONNECTOR
ESP-R-010-P5-X-622

MDC P/N: 618-8010-0622

PROD CODE G005

CODE M

SIZE	CODE IDENT NO.	DWG. NO.
A	98278	0-1532028-1

SCALE: CAD FILE: SHEET 1 OF 1

REVISION					
ZONE	LTR	ECN	DESCRIPTION	DATE	APPR.
	H	42790	UPDATE REV LETTER	1/25/1	=

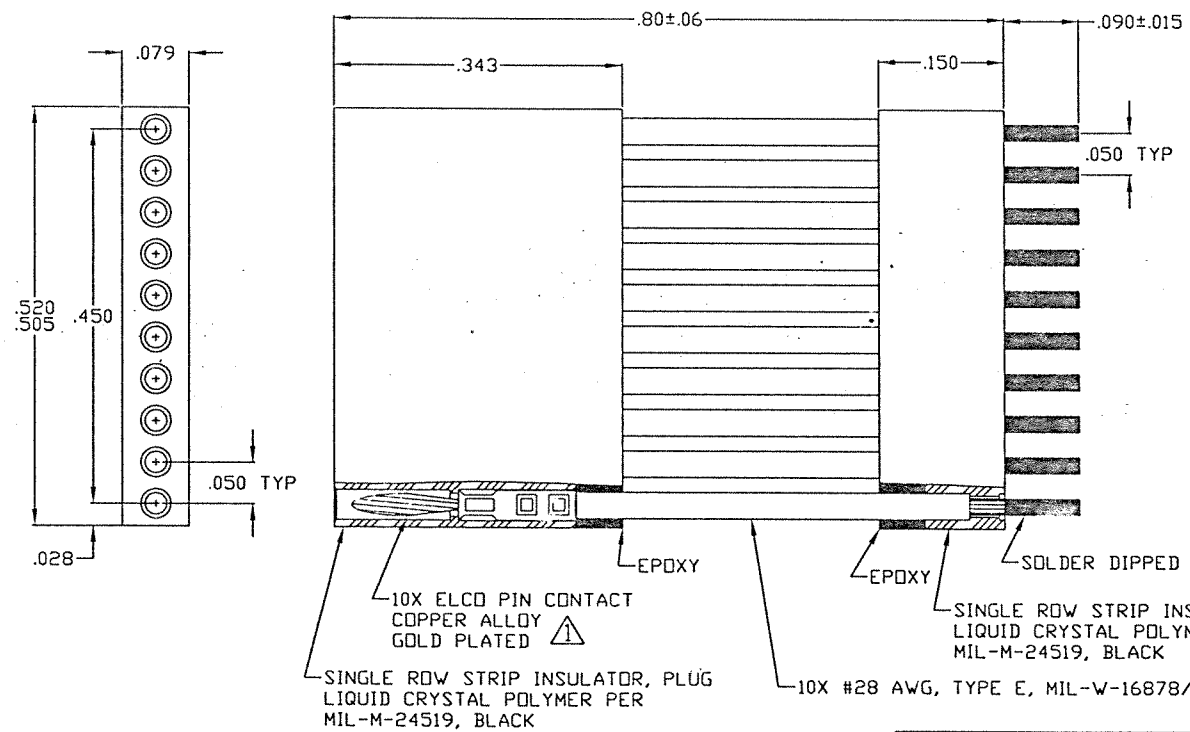

CONNECTOR PERFORMANCE DATA

1. ALL MATERIALS ARE FUNGUS RESISTANT PER MIL-STD-454 REQUIREMENTS.
2. TEMPERATURE RANGE, -55°C TO +125°C
3. CONNECTOR MATING FORCE IS 10 OZ (283 GRAMS) MAX PER CONTACT.
4. CURRENT RATING - 3 AMPS MAX PER CONTACT.
5. VIBRATION - NO LOSS OF CONTINUITY GREATER ONE MICROSECOND, WHEN TESTED PER MIL-STD-1344, METHOD 2005/IV.
6. SHOCK - NO LOSS OF CONTINUITY GREATER ONE MICROSECOND, WHEN TESTED PER MIL-STD-1344, METHOD 2005/E.
7. HUMIDITY - CONNECTOR WILL MEET REQUIREMENTS OF MIL-C-83513 WHEN SUBJECTED TO 10 CYCLES PER METHOD 1002 OF MIL-STD-1344.
8. DURABILITY - NO CHANGE IN PERFORMANCE AFTER 500 MATING AND UNMATING CYCLES.
9. SALT SPRAY - CONNECTOR WILL MEET REQUIREMENTS OF MIL-C-83513 WHEN SUBJECTED TO 48 HRS EXPOSURE PER METHOD 1001 OF MIL-STD-1344.
10. FLUID IMMERSION - WILL MEET SOLVENT AND LUBRICATING OIL IMMERSION PER MIL-C-83513.
11. DIELECTRIC WITHSTANDING VOLTAGE - 600 VAC RMS AT SEA LEVEL AND 150 VAC RMS AT 70,000 FT.
12. INSULATION RESISTANCE - 5,000 MEGOHMS MINIMUM.

NOTES: UNLESS OTHERWISE SPECIFIED

⚠1 GOLD PLATE PER MIL-G-45204, TYPE II, GRADE, C, CLASS 3 OR 4.

ITEM NO.	PART NUMBER	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	QTY REQ'D

PARTS LIST

DIMENSIONS ARE INCHES.
TOLERANCES ARE:
.XX ±.01 .XXX ±.005 ANG ±2°
BREAK EDGES: .005 MAX

MATERIAL:

FINISH:

SURFACE AREA: (SQ. INCHES)

APPROVALS	DATE
DRAWN W. ARAI	5/4/04
P.E.	

THIS INFORMATION IS CONFIDENTIAL AND PROPERTY TO TYCO ELECTRONICS CORPORATION AND ITS WORLD WIDE SUBSIDARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA

tyco Electronics
Microdot Connectors Division
306 Pasadena Avenue
South Pasadena, CA91030

STRIP CONNECTOR
ESP-R-010-P5-X-622

MDC P/N: 618-8010-0622

PROD CODE G605
CODE CD

SIZE	CODE IDENT NO.	DWG. NO.
A	98278	0-1532028-1

SCALE: CAD FILE: SHEET 1 OF 1

ООО «ЛайфЭлектроникс» “LifeElectronics” LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru