

Certified low-power, low-voltage accelerometer



LPA100T-D2

SPECIFICATIONS

Sensitivity, ±5%, 25°C	50 mV/g
Acceleration range	25 g peak
Amplitude nonlinearity	1%
Frequency response:	<ul style="list-style-type: none"> ±5% 3 - 5,000 Hz ±10% 1 - 9,000 Hz ±3 dB 0.3 - 15,000 Hz
Resonance frequency	30 kHz
Transverse sensitivity, max	5% of axial
Sensitivity variation with temp:	<ul style="list-style-type: none"> -25°C -10% +120°C +10%
Temperature sensor:	
Temperature range	-40°C to +120°C
Voltage range	+2.52 to +0.77 V
Temperature signal sensitivity	-10.9 mV/°C
Voltage at 0°C	+2.1 V
Power requirement:	<ul style="list-style-type: none"> Voltage source 3.0 - 5.5 VDC Current (no cable) 100 µA, max
Electrical noise, equiv. g:	
Broadband	2.5 Hz to 25 kHz
Spectral	<ul style="list-style-type: none"> 10 Hz 660 µg 100 Hz 60 µg/√Hz 1,000 Hz 16 µg/√Hz 5 µg/√Hz
Output impedance, max	1,000 Ω
Bias output voltage, settling time, 25°C	<10 ms
Including temp effects	1.5 VDC ± 5%
Grounding	case isolated, internally shielded
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv. g, max	150 µg/gauss
Sealing	hermetic
Base strain sensitivity, max	0.0002 g/µstrain
Sensing element design	PZT, shear
Weight	90 grams
Case material	316L stainless steel
Mounting	1/4-28 UNF tapped hole
Mating connector	M12 style, socket
Recommended cabling	J99

Accessories supplied: SF6 mounting stud; calibration data (level 2)

Certifications

NOTE: See reverse for installation requirements.



Class I, Div 2 Groups A, B, C, D
Class II, Div 2 Groups E, F, G
Class III; T5
Ex nL IIC T





II 3 G
Ex nA nC IIC T5 Gc
Ex ic IIC T5 Gc
Ta = -50°C to +85°C



Key features

- 300 µW power consumption
- BOV settling time of <10 ms
- Certified for use in hazardous areas
- Internal temperature sensor
- Manufactured in ISO 9001 facility

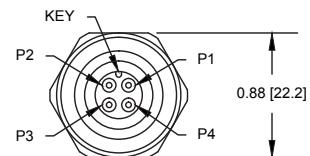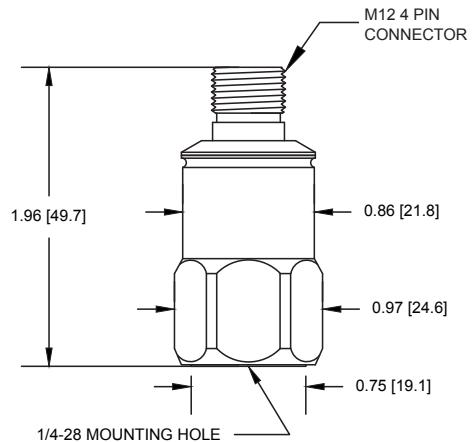

Connections

Function	Connector pin
power	1
common	2
accel signal	3
temp signal	4
shield*	shell

*For installations requiring CE conformance, cable shield must be tied to sensor case.

Note: Due to continuous process improvement, specifications are subject to change without notice. This document is cleared for public release.

Wilcoxon Sensing Technologies
An Amphenol Company

8435 Progress Drive
Frederick, MD 21701
USA

Tel: +1 (301) 330-8811
Fax: +1 (301) 330-8873
info@wilcoxon.com

buy.wilcoxon.com
www.wilcoxon.com

Certified low-power, low-voltage accelerometer



LPA100T-D2

Hazardous area installation requirements

The mating connection shall be made using an M12 connector in compliance with IEC 61076-2-101. This standard requires that the connectors be kept from separating using a lock nut or threaded sleeve on the mating connection. The M12 connector must have a minimum creepage distance of 1.0 mm between adjacent contacts and a minimum distance of 0.2 mm through the solid insulation between adjacent contacts. The M12 connector must use a socket designed to maintain positive compressive force on the connector pin with a minimum diameter of 0.889 mm and maintain a degree of ingress protection of at least IP54 when mated with the integral plug arrangement provided for the Accelerometer.

The equipment does not incorporate an earth bonding facility. It is the responsibility of the user to ensure that earth continuity is maintained, for example, by means of the mounting arrangement.

To limit the supply current to a maximum of 100 µA, both the acceleration output and the temperature output must be connected to input circuits with a minimum impedance of 150,000 ohms.

The 5.5 Vdc rated supply shall be protected such that transients are limited to a maximum of 90 Vdc.

A degree of ingress protection of at least IP54 shall be maintained even when the cable connector is removed, for example by means of the fitting of a suitable cap.

Conditions for type protection Ex ic IIC T5 Gc installations:

The monitoring equipment must have an input impedance of at least 150,000 ohms for both the accelerometer and the temperature signals.

The cable installed must be suitable for the installation temperature and the voltage of any intermingled circuits.

Where the installation requires that the Accelerometer enclosure be grounded, this is to be done using a metal mounting stud as described in document 78013.

Note: Due to continuous process improvement, specifications are subject to change without notice. This document is cleared for public release.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru