

Features

- Seven Darlington pairs per package
- Output current 500 mA per driver (600 mA peak)
- Output voltage 50 V
- Integrated suppression diodes for inductive loads
- Outputs can be paralleled for higher current
- TTL/CMOS/PMOS/DTL compatible inputs
- Input pins placed opposite to output pins to simplify layout

Description

The ULN2001, ULN2002, ULN2003 and ULN2004 are high-voltage, high-current Darlington arrays each containing seven open collector Darlington pairs with common emitters. Each channel is rated at 500 mA and can withstand peak currents of 600 mA. Suppression diodes are included for inductive load driving and the inputs are pinned opposite the outputs to simplify board layout.

The versions interface to all common logic families: ULN2001 (general purpose, DTL, TTL, PMOS, CMOS); ULN2002 (14 - 25 V PMOS); ULN2003 (5 V TTL, CMOS); ULN2004 (6 - 15 V CMOS, PMOS).

These versatile devices are useful for driving a wide range of loads including solenoids, relay DC motors, LED display filament lamps, thermal printheads and high-power buffers.


The ULN2001A/2002A/2003A and 2004A are supplied in a 16-pin DIP package with a copper leadframe to reduce thermal resistance. They are available also in small outline package (SO-16) as ULN2001D1/2002D1/2003D1/ 2004D1.

Contents

| | | |
|----------|--|-----------|
| 1 | Diagram | 3 |
| 2 | Pin configuration | 4 |
| 3 | Maximum ratings | 5 |
| 4 | Electrical characteristics | 6 |
| 5 | Test circuits | 7 |
| 6 | Typical performance characteristics | 9 |
| 7 | Package information | 11 |
| | 7.1 DIP-16L package information | 11 |
| | 7.2 SO-16 Narrow package information | 13 |
| 8 | Order codes | 15 |
| 9 | Revision history | 16 |


1 Diagram

Figure 1. Schematic diagram

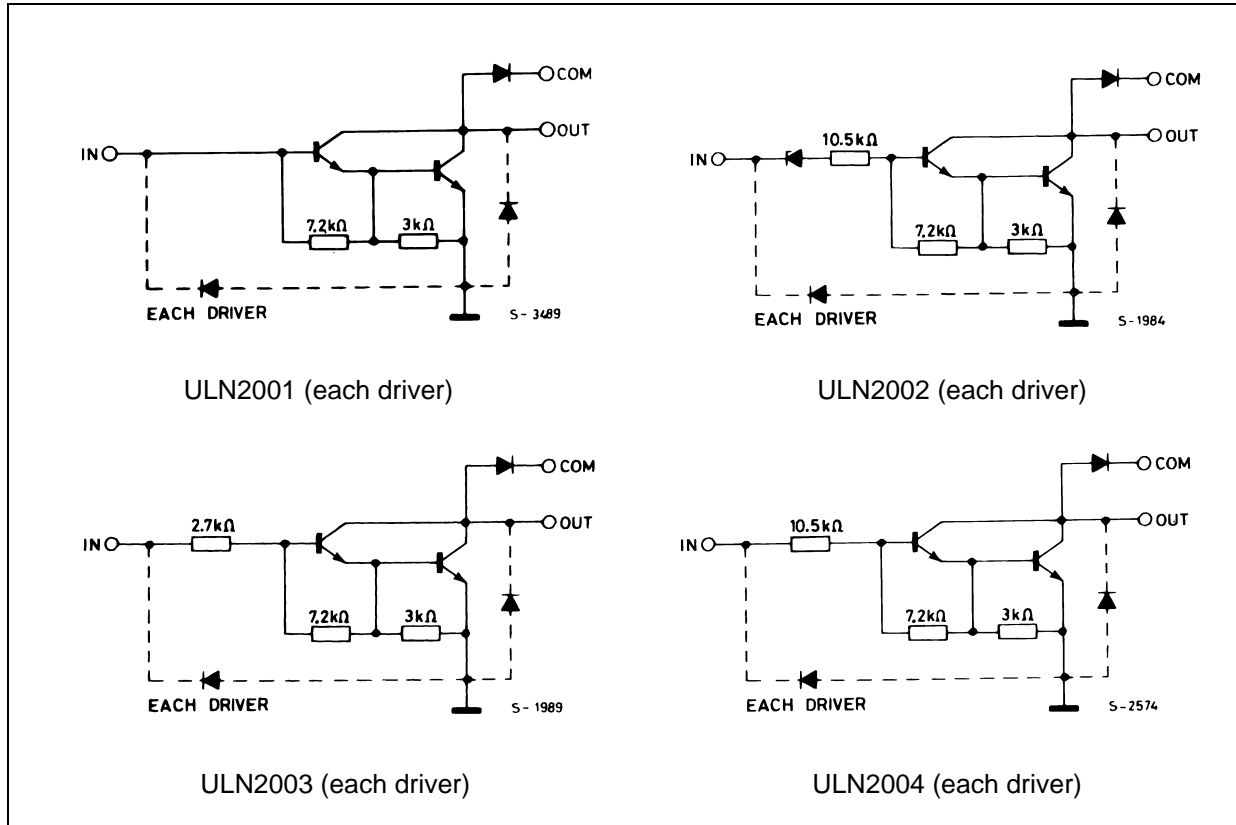

2 Pin configuration

Figure 2. Pin connections (top view)

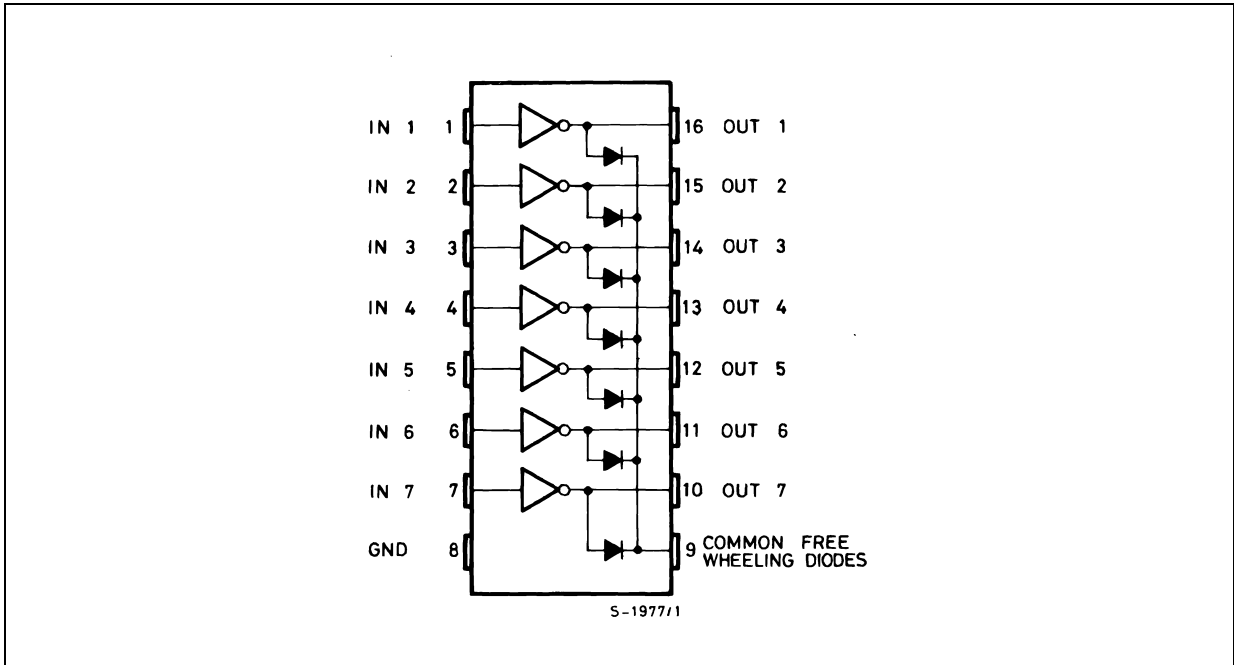

3 Maximum ratings

Table 1. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|-----------|--|-------------|------|
| V_O | Output voltage | 50 | V |
| V_I | Input voltage (for ULN2002A/D - 2003A/D - 2004A/D) | 30 | V |
| I_C | Continuous collector current | 500 | mA |
| I_B | Continuous base current | 25 | mA |
| I_F | Clamping diode continuous current | 350 | mA |
| V_R | Clamping diode reverse voltage | 50 | V |
| T_A | Operating ambient temperature range | - 40 to 85 | °C |
| T_{STG} | Storage temperature range | - 55 to 150 | °C |
| T_J | Junction temperature | 150 | °C |
| ESD | Electrostatic discharge rating - HBM | 2 | kV |

Table 2. Thermal data

| Symbol | Parameter | DIP-16 | SO-16 | Unit |
|------------|---|--------|-------|------|
| R_{thJA} | Thermal resistance junction-ambient, Max. | 70 | 120 | °C/W |

Note: Maximum power dissipation is a function of $T_{J(max)}$, R_{thJA} and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_{J(max)} - T_A) / R_{thJA}$. Operating at the absolute maximum T_J of +150°C can affect reliability.

4 Electrical characteristics

$T_A = 25\text{ °C}$ unless otherwise specified.

Table 3. Electrical characteristics

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|---------------|---|--|------|-----------|-------------|---------------|
| I_{CEX} | Output leakage current | $V_{CE} = 50\text{ V}$, (Figure 3) | | | 50 | μA |
| | | $T_A = 85\text{ °C}$, $V_{CE} = 50\text{ V}$ (Figure 3) | | | 100 | |
| | | $T_A = 85\text{ °C}$ for ULN2002, $V_{CE} = 50\text{ V}$, $V_I = 6\text{ V}$ (Figure 4) | | | 500 | |
| | | $T_A = 85\text{ °C}$ for ULN2002, $V_{CE} = 50\text{ V}$, $V_I = 1\text{ V}$ (Figure 4) | | | 500 | |
| $V_{CE(SAT)}$ | Collector-emitter saturation voltage (Figure 5) | $I_C = 100\text{ mA}$, $I_B = 250\text{ }\mu\text{A}$ | | 0.9 | 1.1 | V |
| | | $I_C = 200\text{ mA}$, $I_B = 350\text{ }\mu\text{A}$ | | 1.1 | 1.3 | |
| | | $I_C = 350\text{ mA}$, $I_B = 500\text{ }\mu\text{A}$ | | 1.3 | 1.6 | |
| $I_{I(ON)}$ | Input current (Figure 6) | for ULN2002, $V_I = 17\text{ V}$ | | 0.82 | 1.25 | mA |
| | | for ULN2003, $V_I = 3.85\text{ V}$ | | 0.93 | 1.35 | |
| | | for ULN2004, $V_I = 5\text{ V}$ $V_I = 12\text{ V}$ | | 0.35 1 | 0.5 1.45 | |
| $I_{I(OFF)}$ | Input current (Figure 7) | $T_A = 85\text{ °C}$, $I_C = 500\text{ }\mu\text{A}$ | 50 | 65 | | μA |
| $V_{I(ON)}$ | Input voltage (Figure 8) | $V_{CE} = 2\text{ V}$, for ULN2002 $I_C = 300\text{ mA}$ | | | 13 | V |
| | | for ULN2003 $I_C = 200\text{ mA}$ | | | 2.4 | |
| | | $I_C = 250\text{ mA}$ | | | 2.7 | |
| | | $I_C = 300\text{ mA}$ | | | 3 | |
| | | for ULN2004 $I_C = 125\text{ mA}$ | | | 5 | |
| | | $I_C = 200\text{ mA}$ | | | 6 | |
| | | $I_C = 275\text{ mA}$ $I_C = 350\text{ mA}$ | | | 7 8 | |
| h_{FE} | DC Forward current gain (Figure 5) | for ULN2001, $V_{CE} = 2\text{ V}$, $I_C = 350\text{ mA}$ | 1000 | | | |
| C_I | Input capacitance | | | 15 | 25 | pF |
| t_{PLH} | Turn-on delay time | $0.5 V_I$ to $0.5 V_O$ | | 0.25 | 1 | μs |
| t_{PHL} | Turn-off delay time | $0.5 V_I$ to $0.5 V_O$ | | 0.25 | 1 | μs |
| I_R | Clamp diode leakage current (Figure 9) | $V_R = 50\text{ V}$ | | | 50 | μA |
| | | $T_A = 85\text{ °C}$, $V_R = 50\text{ V}$ | | | 100 | |
| V_F | Clamp diode forward voltage (Figure 10) | $I_F = 350\text{ mA}$ | | 1.7 | 2 | V |

5 Test circuits

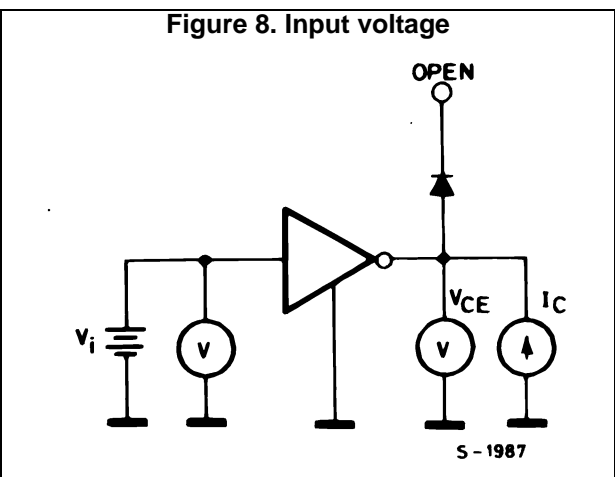
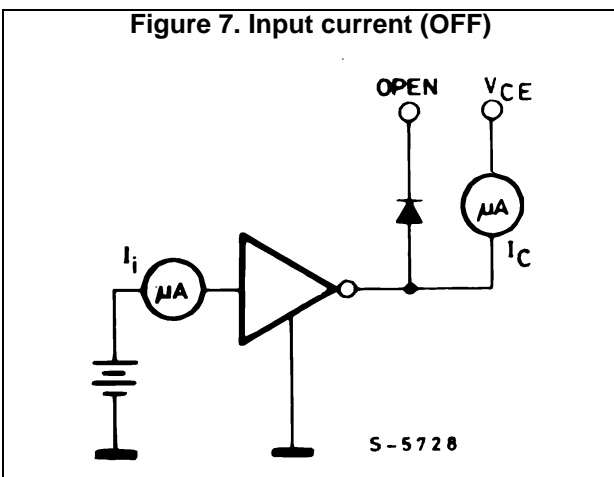
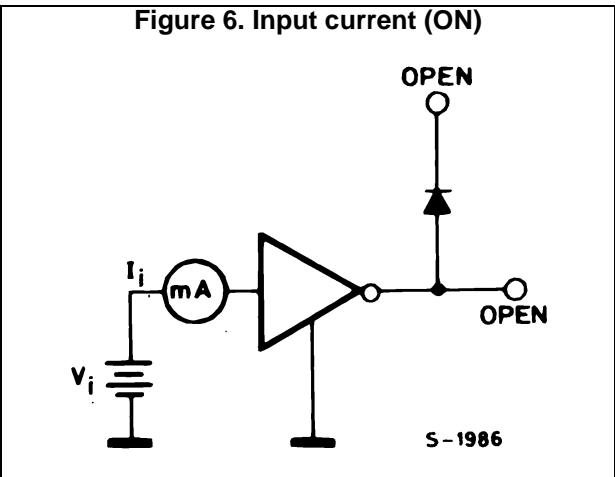
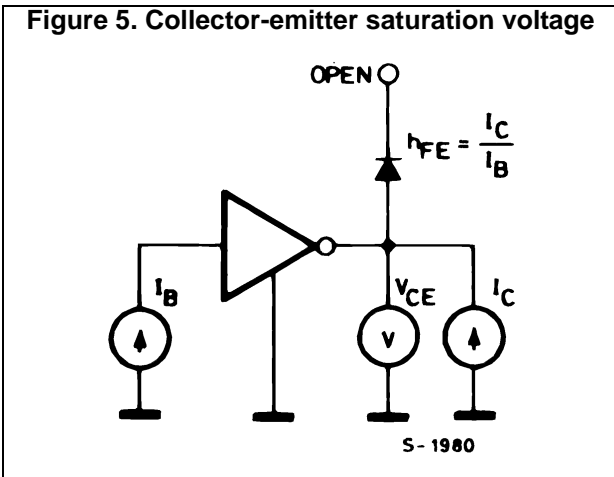
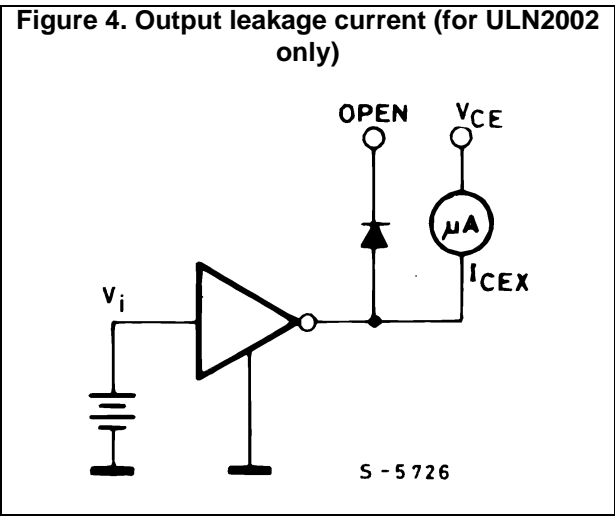
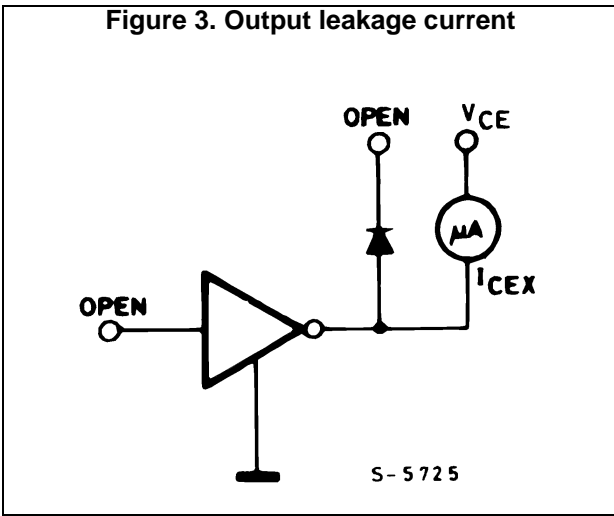


Figure 9. Clamp diode leakage current


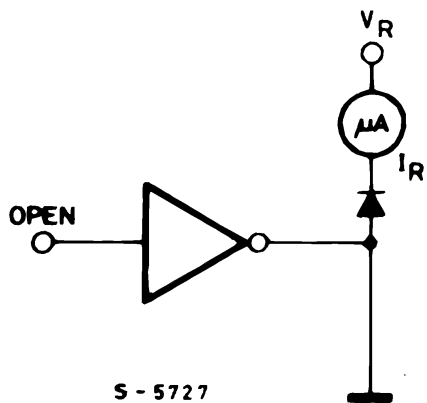


Figure 10. Clamp diode forward voltage

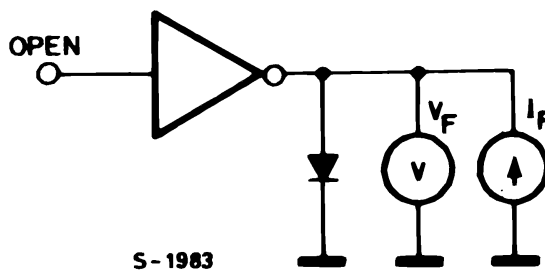

6 Typical performance characteristics

Figure 11. Collector current vs. saturation voltage ($T_J = 25^\circ\text{C}$)



Figure 12. Collector current vs. saturation voltage

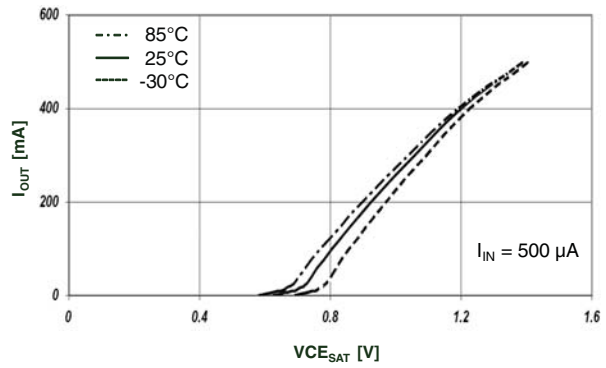


Figure 13. Input current vs. input voltage

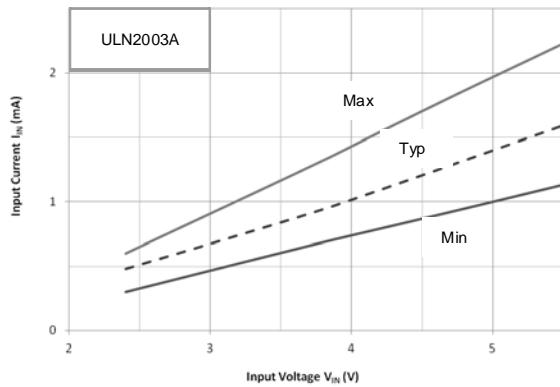


Figure 14. Input current vs. input voltage ($T_a = 25^\circ\text{C}$)

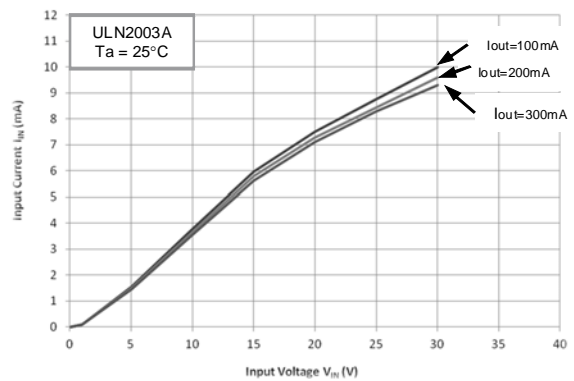


Figure 15. Collector current vs. input current

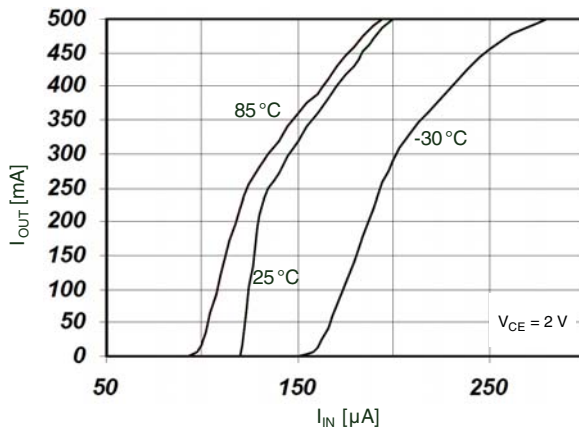


Figure 16. h_{FE} vs. output current

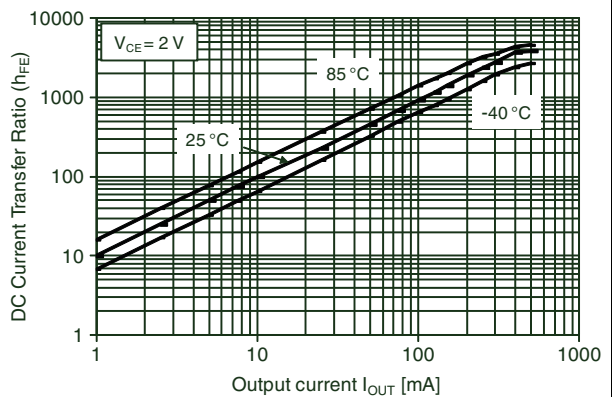


Figure 17. Peak collector current vs. duty cycle (DIP-16)



Figure 18. Peak collector current vs. duty cycle (SO-16)



7 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

7.1 DIP-16L package information

Figure 19. DIP-16L package outline

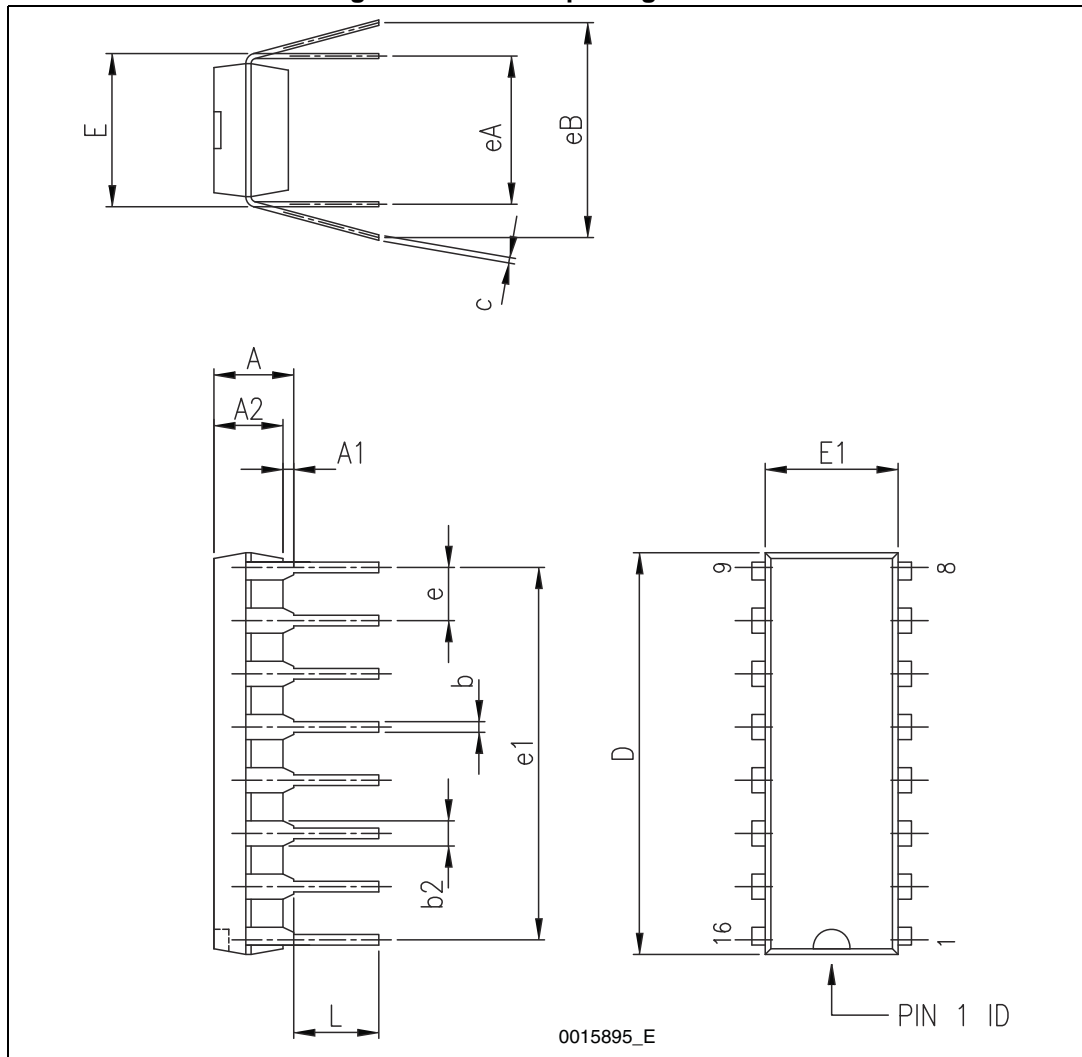


Table 4. DIP-16L mechanical data

| Dim. | mm. | | |
|------|-------|-------|-------|
| | Min. | Typ. | Max. |
| A | | | 5.33 |
| A1 | 0.38 | | |
| A2 | 2.92 | 3.30 | 4.95 |
| b | 0.36 | 0.46 | 0.56 |
| b2 | 1.14 | 1.52 | 1.78 |
| c | 0.20 | 0.25 | 0.36 |
| D | 18067 | 19.18 | 19.69 |
| E | 7.62 | 7.87 | 8.26 |
| E1 | 6.10 | 6.35 | 7.11 |
| e | | 2.54 | |
| e1 | | 17.78 | |
| eA | | 7.62 | |
| eB | | | 10.92 |
| L | 2.92 | 3.30 | 3.81 |

7.2 SO-16 Narrow package information

Figure 20. SO-16 package outline

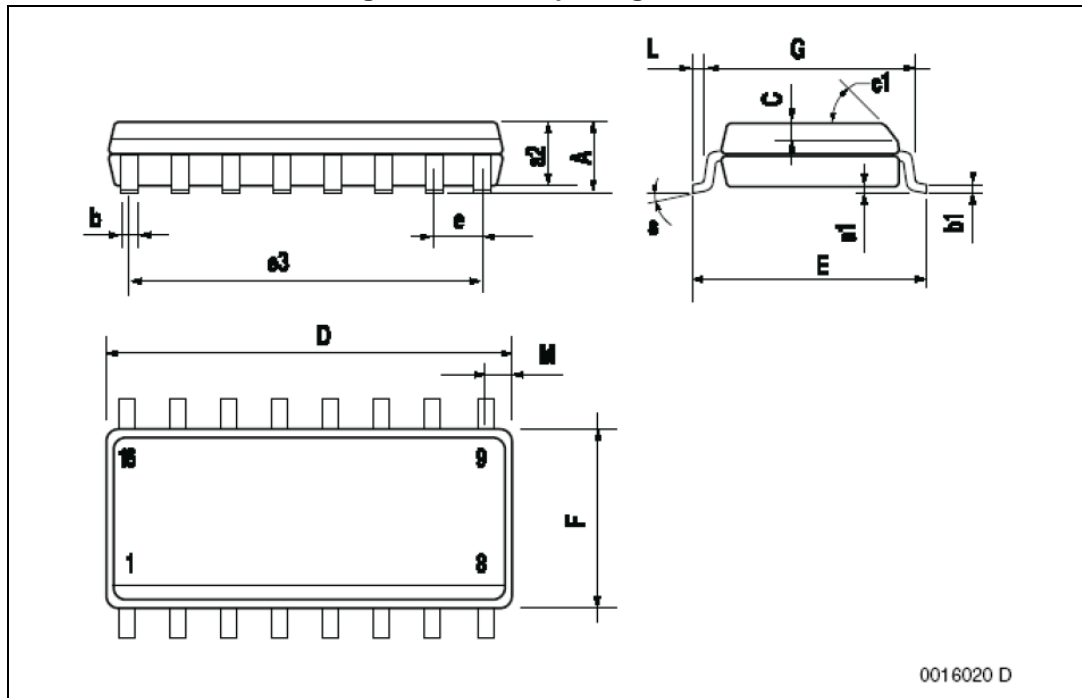


Table 5. SO-16 Narrow mechanical data

| Dim. | mm. | | | inch. | | |
|------|-----------|------|------|--------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | | | 1.75 | | | 0.069 |
| a1 | 0.1 | | 0.25 | 0.004 | | 0.009 |
| a2 | | | 1.6 | | | 0.063 |
| b | 0.35 | | 0.46 | 0.014 | | 0.018 |
| b1 | 0.19 | | 0.25 | 0.007 | | 0.010 |
| C | | 0.5 | | | 0.020 | |
| c1 | | | 45° | (typ.) | | |
| D(1) | 9.8 | | 10 | 0.386 | | 0.394 |
| E | 5.8 | | 6.2 | 0.228 | | 0.244 |
| e | | 1.27 | | | 0.050 | |
| e3 | | 8.89 | | | 0.350 | |
| F(1) | 3.8 | | 4.0 | 0.150 | | 0.157 |
| G | 4.60 | | 5.30 | 0.181 | | 0.208 |
| L | 0.4 | | 1.27 | 0.150 | | 0.050 |
| M | | | 0.62 | | | 0.024 |
| S | 8° (max.) | | | | | |

8 Order codes

Table 6. Order codes

| Part number | Package |
|--------------------|------------------------|
| ULN2001A | DIP-16 |
| ULN2002A | DIP-16 |
| ULN2003A | DIP-16 |
| ULN2004A | DIP-16 |
| ULN2001D1013TR | SO-16 in tape and reel |
| ULN2002D1013TR | SO-16 in tape and reel |
| ULN2003D1013TR | SO-16 in tape and reel |
| ULN2004D1013TR | SO-16 in tape and reel |

9 Revision history

Table 7. Revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 05-Dec-2006 | 5 | Order code updated and document reformatted. |
| 28-Aug-2007 | 6 | Added Table 1 in cover page. |
| 07-May-2012 | 7 | Modified: Figure 12 on page 9. Added: Figure 13, 14, 15 and Figure 16 on page 9. |
| 01-Jun-2012 | 8 | Updated: DIP-16L package mechanical data Table 4 on page 12 and Figure 19 on page 11. |
| 22-Jul-2015 | 9 | Added Plastic DIP16-L package. Removed Device summary table. Updated Table 7: Order code. Added Section 7.2: Plastic DIP-16L package information. Minor text changes. |
| 07-Nov-2017 | 10 | Removed plastic DIP-16L package and associated order code ULN2003A |
| 27-Jun-2018 | 11 | Updated: $I_{I(ON)}$ test condition in Table 3: Electrical characteristics. |
| 09-Jul-2019 | 12 | Added I_F , V_R , ESD parameters in Table 1: Absolute maximum ratings and note in Table 2: Thermal data . |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru