

# Integrated Silicon Pressure Sensor On-Chip Signal Conditioned, Temperature Compensated and Calibrated

The MPxx5010 series piezoresistive transducers are state-of-the-art monolithic silicon pressure sensors designed for a wide range of applications, but particularly those employing a microcontroller or microprocessor with A/D inputs. This transducer combines advanced micromachining techniques, thin-film metallization, and bipolar processing to provide an accurate, high level analog output signal that is proportional to the applied pressure. The axial port has been modified to accommodate industrial grade tubing.

## Features

- 5.0% Maximum Error over 0° to 85°C
- Ideally Suited for Microprocessor or Microcontroller-Based Systems
- Durable Epoxy Unibody and Thermoplastic (PPS) Surface Mount Package
- Temperature Compensated over -40° to +125°C
- Patented Silicon Shear Stress Strain Gauge
- Available in Differential and Gauge Configurations
- Available in Surface Mount (SMT) or Through-hole (DIP) Configurations


## MPX5010 MPXV5010 MPVZ5010 Series

0 to 10 kPa (0 to 1.45 psi)  
(0 to 1019.78 mm H<sub>2</sub>O)  
0.2 to 4.7 V Output


## Application Examples

- Hospital Beds
- HVAC
- Respiratory Systems
- Process Control
- Washing Machine Water Level Measurement (Reference AN1950)
- Ideally Suited for Microprocessor or Microcontroller-Based Systems
- Appliance Liquid Level and Pressure Measurement


| ORDERING INFORMATION                                          |          |            |        |      |               |              |          |                |
|---------------------------------------------------------------|----------|------------|--------|------|---------------|--------------|----------|----------------|
| Device Name                                                   | Case No. | # of Ports |        |      | Pressure Type |              |          | Device Marking |
|                                                               |          | None       | Single | Dual | Gauge         | Differential | Absolute |                |
| Unibody Package (MPX5010 Series)                              |          |            |        |      |               |              |          |                |
| MPX5010DP                                                     | 867C     |            |        | •    |               | •            |          | MPX5010DP      |
| MPX5010GP                                                     | 867B     |            | •      |      | •             |              |          | MPX5010GP      |
| MPX5010GS                                                     | 867E     |            | •      |      | •             |              |          | MPX5010D       |
| MPX5010GSX                                                    | 867F     |            | •      |      | •             |              |          | MPX5010D       |
| Small Outline Package (MPXV5010 Series)                       |          |            |        |      |               |              |          |                |
| MPXV5010DP                                                    | 1351     |            |        | •    |               | •            |          | MPXV5010DP     |
| MPXV5010G6U                                                   | 482      | •          |        |      | •             |              |          | MPXV5010G      |
| MPXV5010GC6T1                                                 | 482A     |            | •      |      | •             |              |          | MPXV5010G      |
| MPXV5010GC6U                                                  | 482A     |            | •      |      | •             |              |          | MPXV5010G      |
| MPXV5010GC7U                                                  | 482C     |            | •      |      | •             |              |          | MPXV5010G      |
| MPXV5010GP                                                    | 1369     |            | •      |      | •             |              |          | MPXV5010GP     |
| Small Outline Package (Media Resistant Gel) (MPVZ5010 Series) |          |            |        |      |               |              |          |                |
| MPVZ5010G6U                                                   | 482      | •          |        |      | •             |              |          | MPVZ5010G      |
| MPVZ5010G7U                                                   | 482B     | •          |        |      | •             |              |          | MPVZ5010G      |
| MPVZ5010GW6U                                                  | 1735     |            | •      |      | •             |              |          | MZ5010GW       |
| MPVZ5010GW7U                                                  | 1560     |            | •      |      | •             |              |          | MZ5010GW       |

**SMALL OUTLINE PACKAGES SURFACE MOUNT**


**MPXV5010GC6U/C6T1**  
**CASE 482A-01**




**MPXV5010G6U,**  
**MPVZ5010G6U**  
**CASE 482-01**




**MPXV5010DP**  
**CASE 1351-01**




**MPXV5010GP**  
**CASE 1369-01**



**MPVZ5010GW6U**  
**CASE 1735-01**

**SMALL OUTLINE PACKAGES THROUGH-HOLE**


**MPVZ5010G7U**  
**CASE 482B-03**




**MPXV5010GC7U**  
**CASE 482C-03**




**MPVZ5010GW7U**  
**CASE 1560-02**

**UNIBODY PACKAGES**


**MPX5010GP**  
**CASE 867B-04**



**MPX5010DP**  
**CASE 867C-05**



**MPX5010GS**  
**CASE 867E-03**



**MPX5010GSX**  
**CASE 867F-03**

## Operating Characteristics

**Table 1. Operating Characteristics** ( $V_S = 5.0$  Vdc,  $T_A = 25^\circ\text{C}$  unless otherwise noted,  $P_1 > P_2$ . Decoupling circuit shown in Figure 3 required to meet specification.)

| Characteristic                                                | Symbol    | Min   | Typ          | Max           | Unit                            |
|---------------------------------------------------------------|-----------|-------|--------------|---------------|---------------------------------|
| Pressure Range                                                | $P_{OP}$  | 0     | —            | 10<br>1019.78 | kPa<br>mm H <sub>2</sub> O      |
| Supply Voltage <sup>(1)</sup>                                 | $V_S$     | 4.75  | 5.0          | 5.25          | Vdc                             |
| Supply Current                                                | $I_o$     | —     | 5.0          | 10            | mAdc                            |
| Minimum Pressure Offset <sup>(2)</sup><br>@ $V_S = 5.0$ Volts | $V_{off}$ | 0     | 0.2          | 0.425         | Vdc                             |
| Full Scale Output <sup>(3)</sup><br>@ $V_S = 5.0$ Volts       | $V_{FSO}$ | 4.475 | 4.7          | 4.925         | Vdc                             |
| Full Scale Span <sup>(4)</sup><br>@ $V_S = 5.0$ Volts         | $V_{FSS}$ | 4.275 | 4.5          | 4.725         | Vdc                             |
| Accuracy <sup>(5)</sup>                                       | —         | —     | —            | ±5.0          | % $V_{FSS}$                     |
| Sensitivity                                                   | $V/P$     | —     | 450<br>4.413 | —             | mV/mm<br>mV/mm H <sub>2</sub> O |
| Response Time <sup>(6)</sup>                                  | $t_R$     | —     | 1.0          | —             | ms                              |
| Output Source Current at Full Scale Output                    | $I_{O+}$  | —     | 0.1          | —             | mAdc                            |
| Warm-Up Time <sup>(7)</sup>                                   | —         | —     | 20           | —             | ms                              |
| Offset Stability <sup>(8)</sup>                               | —         | —     | ±0.5         | —             | % $V_{FSS}$                     |

1. Device is ratiometric within this specified excitation range.
2. Offset ( $V_{off}$ ) is defined as the output voltage at the minimum rated pressure.
3. Full Scale Output ( $V_{FSO}$ ) is defined as the output voltage at the maximum or full rated pressure.
4. Full Scale Span ( $V_{FSS}$ ) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum rated pressure.
5. Accuracy (error budget) consists of the following:  
 Linearity: Output deviation from a straight line relationship with pressure over the specified pressure range.  
 Temperature Hysteresis: Output deviation at any temperature within the operating temperature range, after the temperature is cycled to and from the minimum or maximum operating temperature points, with zero differential pressure applied.  
 Pressure Hysteresis: Output deviation at any pressure within the specified range, when this pressure is cycled to and from the minimum or maximum rated pressure, at  $25^\circ\text{C}$ .  
 TcSpan: Output deviation over the temperature range of  $0^\circ$  to  $85^\circ\text{C}$ , relative to  $25^\circ\text{C}$ .  
 TcOffset: Output deviation with minimum rated pressure applied, over the temperature range of  $0^\circ$  to  $85^\circ\text{C}$ , relative to  $25^\circ\text{C}$ .  
 Variation from Nominal: The variation from nominal values, for Offset or Full Scale Span, as a percent of  $V_{FSS}$ , at  $25^\circ\text{C}$ .
6. Response Time is defined as the time for the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.
7. Warm-up Time is defined as the time required for the product to meet the specified output voltage after the Pressure has been stabilized.
8. Offset Stability is the product's output deviation when subjected to 1000 hours of Pulsed Pressure, Temperature Cycling with Bias Test.

## Maximum Ratings

Table 2. Maximum Ratings<sup>(1)</sup>

| Rating                     | Symbol           | Value       | Unit |
|----------------------------|------------------|-------------|------|
| Maximum Pressure (P1 > P2) | P <sub>max</sub> | 40          | kPa  |
| Storage Temperature        | T <sub>stg</sub> | −40 to +125 | °C   |
| Operating Temperature      | T <sub>A</sub>   | −40 to +125 | °C   |

1. Exposure beyond the specified limits may cause permanent damage or degradation to the device.

Figure 1 shows a block diagram of the internal circuitry integrated on a pressure sensor chip.

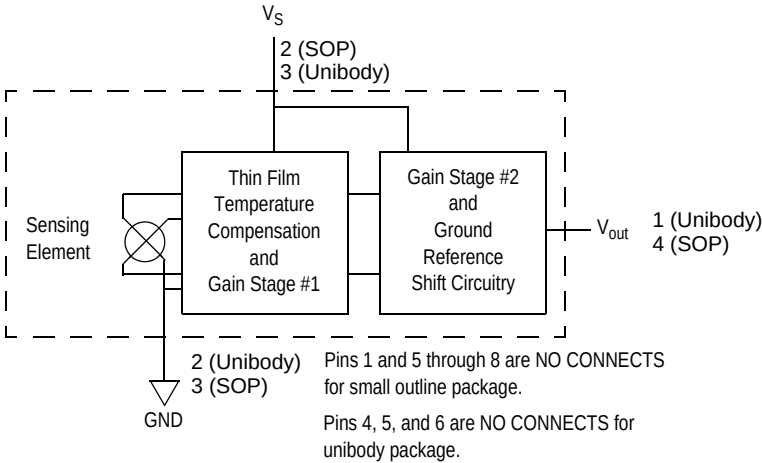


Figure 1. Fully Integrated Pressure Sensor Schematic

## ON-CHIP TEMPERATURE COMPENSATION AND CALIBRATION

The performance over temperature is achieved by integrating the shear-stress strain gauge, temperature compensation, calibration and signal conditioning circuitry onto a single monolithic chip.

Figure 3 illustrates the Differential or Gauge configuration in the basic chip carrier (Case 482). A fluorosilicone gel isolates the die surface and wire bonds from the environment, while allowing the pressure signal to be transmitted to the sensor diaphragm.

The MPxx5010G series pressure sensor operating characteristics, and internal reliability and qualification tests are based on use of dry air as the pressure media. Media,

other than dry air, may have adverse effects on sensor performance and long-term reliability. Contact the factory for information regarding media compatibility in your application.

Figure 4 shows the recommended decoupling circuit for interfacing the integrated sensor to the A/D input of a microprocessor or microcontroller. Proper decoupling of the power supply is recommended.

Figure 5 shows the sensor output signal relative to pressure input. Typical, minimum, and maximum output curves are shown for operation over a temperature range of 0° to 85°C using the decoupling circuit shown in Figure 4. The output will saturate outside of the specified pressure range.

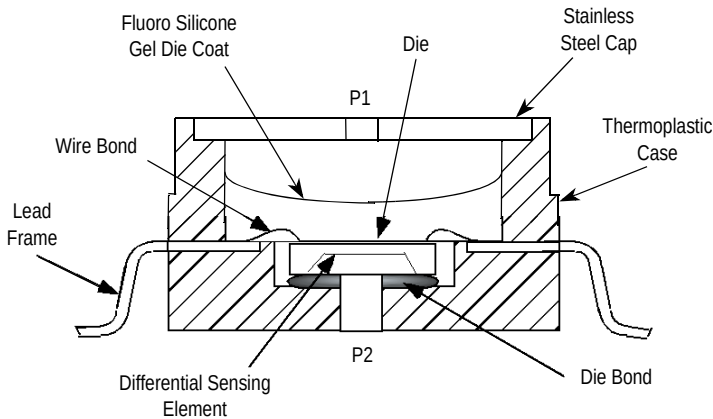


**Figure 2. Cross-Sectional Diagram SOP (not to scale)**

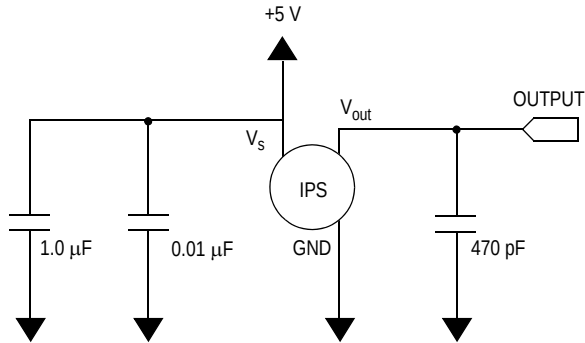


**Figure 3. Recommended Power Supply Decoupling and Output Filtering**  
(For additional output filtering, please refer to Application Note AN1646.)


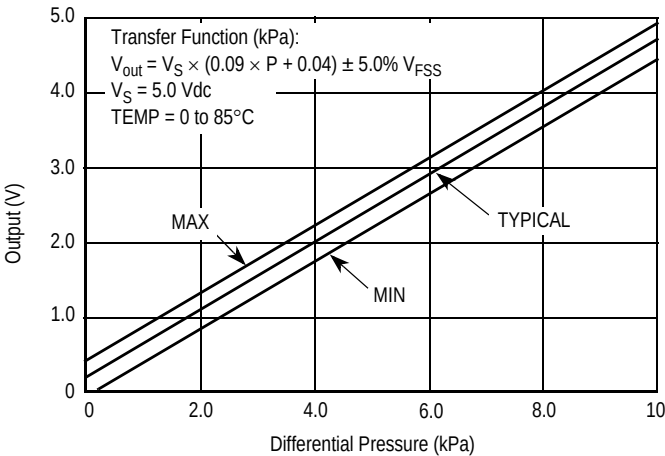


**Figure 4. Output vs. Pressure Differential**

## Transfer Function


**Nominal Transfer Value:**  $V_{out} = V_S \times (0.09 \times P + 0.04)$   
 $\pm (\text{Pressure Error} \times \text{Temp. Factor} \times 0.09 \times V_S)$   
 $V_S = 5.0 \text{ V} \pm 0.25 \text{ Vdc}$

## Temperature Error Band

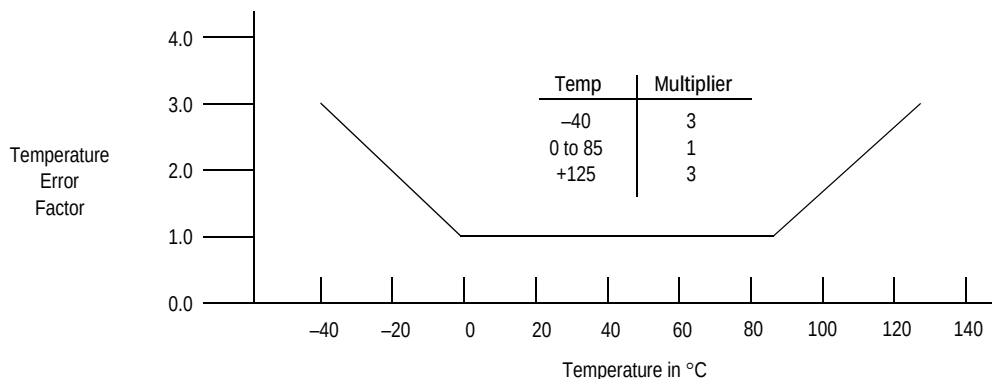

NOTE: The Temperature Multiplier is a linear response from 0° to -40°C and from 85° to 125°C.

## Pressure Error Band

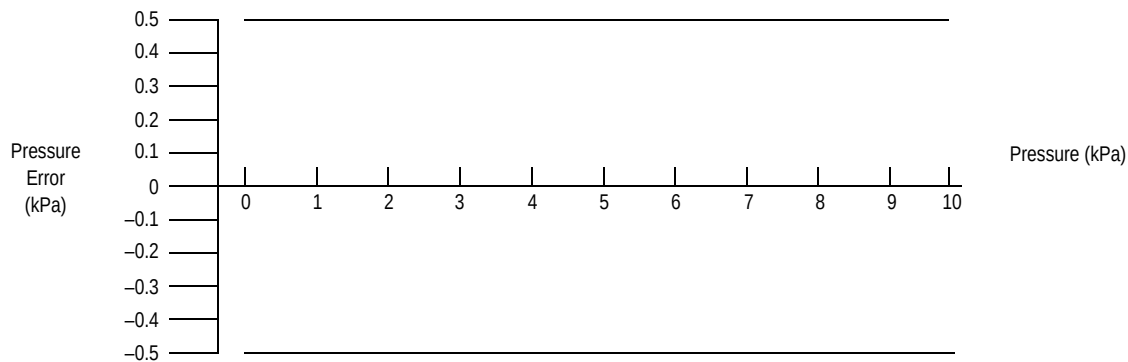

| Pressure      | Error (Max) |
|---------------|-------------|
| 0 to 10 (kPa) | ±0.5 (kPa)  |

# PRESSURE (P1)/VACUUM (P2) SIDE IDENTIFICATION TABLE

Freescall designates the two sides of the pressure sensor as the Pressure (P1) side and the Vacuum (P2) side. The Pressure (P1) side is the side containing fluorosilicone gel which protects the die from harsh media. The MPX pressure

sensor is designed to operate with positive differential pressure applied,  $P1 > P2$ .

The Pressure (P1) side may be identified by using the table below:

| Part Number      | Case Type | Pressure (P1) Side Identifier |
|------------------|-----------|-------------------------------|
| MPX5010DP        | 867C      | Side with Part Marking        |
| MPX5010GP        | 867B      | Side with Port Attached       |
| MPX5010GS        | 867E      | Side with Port Attached       |
| MPX5010GSX       | 867F      | Side with Port Attached       |
| MPXV5010G6U      | 482       | Stainless Steel Cap           |
| MPXV5010GC6U/6T1 | 482A      | Side with Port Attached       |
| MPXV5010GC7U     | 482C      | Side with Port Attached       |
| MPXV5010GP       | 1369      | Side with Port Attached       |
| MPXV5010DP       | 1351      | Side with Part Marking        |
| MPVZ5010G6U      | 482       | Stainless Steel Cap           |
| MPVZ5010G7U      | 482B      | Stainless Steel Cap           |
| MPVZ5010GW6U     | 1735      | Vertical Port Attached        |
| MPVZ5010GW7U     | 1560      | Vertical Port Attached        |

## MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the surface mount packages must be the correct size to ensure proper solder connection interface between the board and the package. With the correct

footprint, the packages will self align when subjected to a solder reflow process. It is always recommended to design boards with a solder mask layer to avoid bridging and shorting between solder pads.


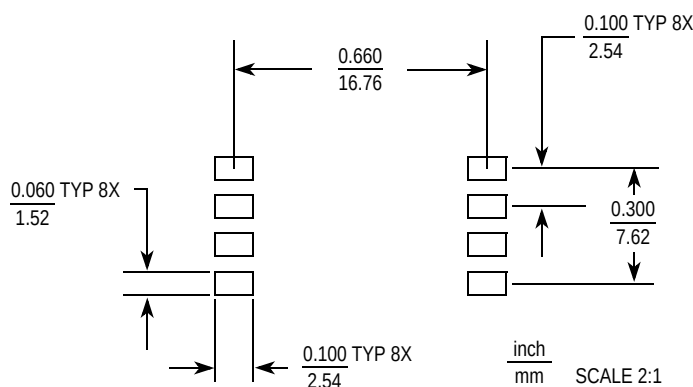


Figure 5. SOP Footprint (Case 482)


# PACKAGE DIMENSIONS

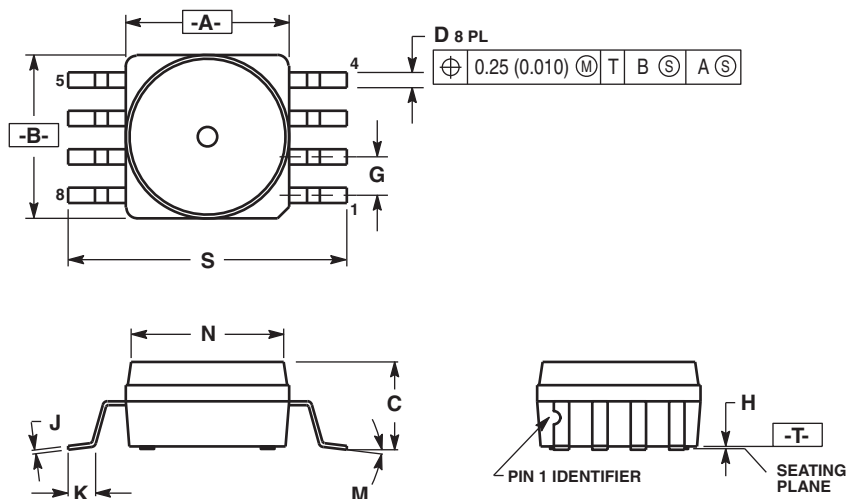

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006).
  5. ALL VERTICAL SURFACES 5° TYPICAL DRAFT.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.415     | 0.425 | 10.54       | 10.79 |
| B   | 0.415     | 0.425 | 10.54       | 10.79 |
| C   | 0.212     | 0.230 | 5.38        | 5.84  |
| D   | 0.038     | 0.042 | 0.96        | 1.07  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.002     | 0.010 | 0.05        | 0.25  |
| J   | 0.009     | 0.011 | 0.23        | 0.28  |
| K   | 0.061     | 0.071 | 1.55        | 1.80  |
| M   | 0°        | 7°    | 0°          | 7°    |
| N   | 0.405     | 0.415 | 10.29       | 10.54 |
| S   | 0.709     | 0.725 | 18.01       | 18.41 |

**CASE 482-01  
ISSUE O  
SMALL OUTLINE PACKAGE**

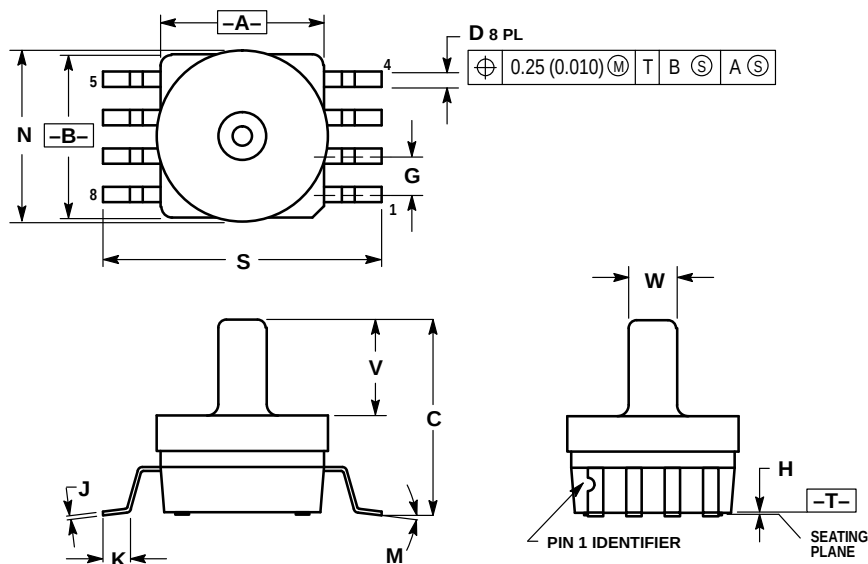


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006).
  5. ALL VERTICAL SURFACES 5° TYPICAL DRAFT.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.415     | 0.425 | 10.54       | 10.79 |
| B   | 0.415     | 0.425 | 10.54       | 10.79 |
| C   | 0.500     | 0.520 | 12.70       | 13.21 |
| D   | 0.038     | 0.042 | 0.96        | 1.07  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.002     | 0.010 | 0.05        | 0.25  |
| J   | 0.009     | 0.011 | 0.23        | 0.28  |
| K   | 0.061     | 0.071 | 1.55        | 1.80  |
| M   | 0°        | 7°    | 0°          | 7°    |
| N   | 0.444     | 0.448 | 11.28       | 11.38 |
| S   | 0.709     | 0.725 | 18.01       | 18.41 |
| V   | 0.245     | 0.255 | 6.22        | 6.48  |
| W   | 0.115     | 0.125 | 2.92        | 3.17  |

**CASE 482A-0  
ISSUE A  
SMALL OUTLINE PACKAGE**

# PACKAGE DIMENSIONS

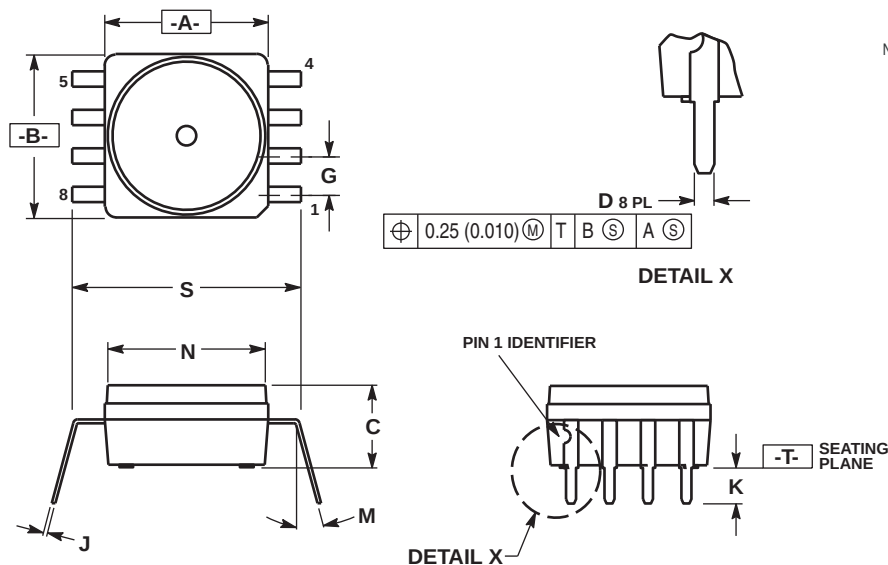


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006).
5. ALL VERTICAL SURFACES 5° TYPICAL DRAFT.
6. DIMENSION S TO CENTER OF LEAD WHEN FORMED PARALLEL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.415     | 0.425 | 10.54       | 10.79 |
| B   | 0.415     | 0.425 | 10.54       | 10.79 |
| C   | 0.210     | 0.220 | 5.33        | 5.59  |
| D   | 0.026     | 0.034 | 0.66        | 0.864 |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| J   | 0.009     | 0.011 | 0.23        | 0.28  |
| K   | 0.100     | 0.120 | 2.54        | 3.05  |
| M   | 0°        | 15°   | 0°          | 15°   |
| N   | 0.405     | 0.415 | 10.29       | 10.54 |
| S   | 0.540     | 0.560 | 13.72       | 14.22 |

**CASE 482B-03  
ISSUE B  
SMALL OUTLINE PACKAGE**

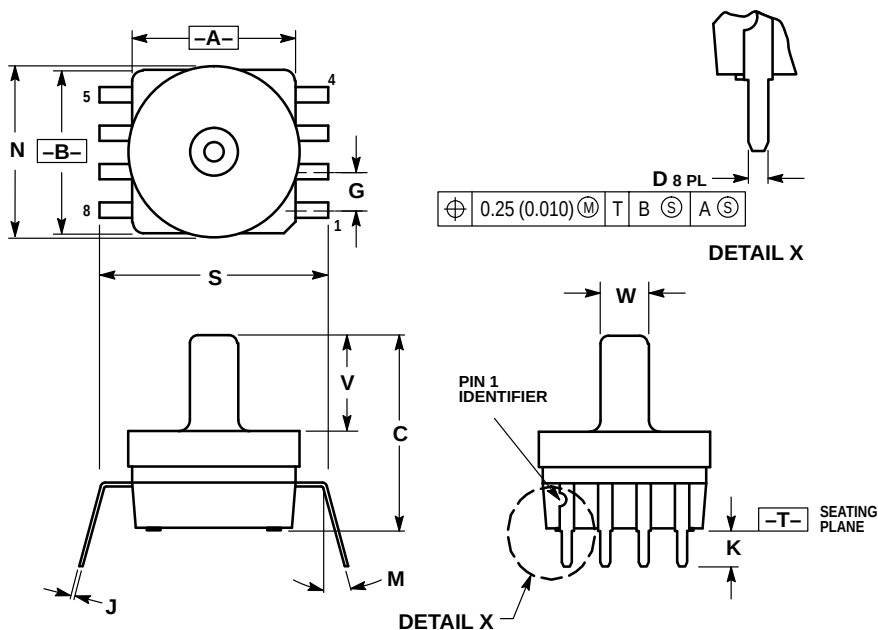


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006).
5. ALL VERTICAL SURFACES 5° TYPICAL DRAFT.
6. DIMENSION S TO CENTER OF LEAD WHEN FORMED PARALLEL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.415     | 0.425 | 10.54       | 10.79 |
| B   | 0.415     | 0.425 | 10.54       | 10.79 |
| C   | 0.500     | 0.520 | 12.70       | 13.21 |
| D   | 0.026     | 0.034 | 0.66        | 0.864 |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| J   | 0.009     | 0.011 | 0.23        | 0.28  |
| K   | 0.100     | 0.120 | 2.54        | 3.05  |
| M   | 0°        | 15°   | 0°          | 15°   |
| N   | 0.444     | 0.448 | 11.28       | 11.38 |
| S   | 0.540     | 0.560 | 13.72       | 14.22 |
| V   | 0.245     | 0.255 | 6.22        | 6.48  |
| W   | 0.115     | 0.125 | 2.92        | 3.17  |

**CASE 482C-03  
ISSUE B  
SMALL OUTLINE PACKAGE**

# PACKAGE DIMENSIONS

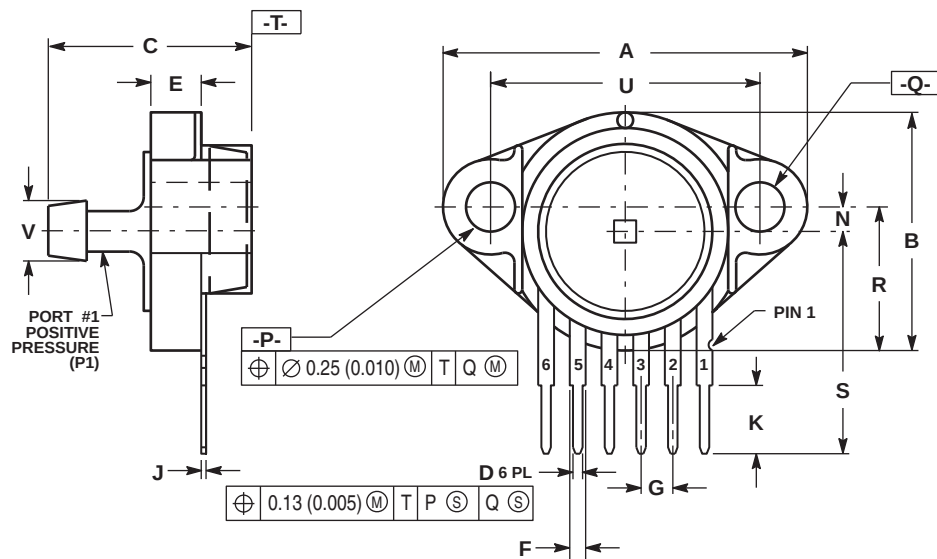


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 1.080  | 1.120 | 27.43       | 28.45 |
| B   | 0.740  | 0.760 | 18.80       | 19.30 |
| C   | 0.630  | 0.650 | 16.00       | 16.51 |
| D   | 0.027  | 0.033 | 0.68        | 0.84  |
| E   | 0.160  | 0.180 | 4.06        | 4.57  |
| F   | 0.048  | 0.064 | 1.22        | 1.63  |
| G   | 0.100  | BSC   | 2.54        | BSC   |
| J   | 0.014  | 0.016 | 0.36        | 0.41  |
| K   | 0.220  | 0.240 | 5.59        | 6.10  |
| N   | 0.070  | 0.080 | 1.78        | 2.03  |
| P   | 0.150  | 0.160 | 3.81        | 4.06  |
| Q   | 0.150  | 0.160 | 3.81        | 4.06  |
| R   | 0.440  | 0.460 | 11.18       | 11.68 |
| S   | 0.695  | 0.725 | 17.65       | 18.42 |
| U   | 0.840  | 0.860 | 21.34       | 21.84 |
| V   | 0.182  | 0.194 | 4.62        | 4.93  |

- STYLE 1:
1. V<sub>OUT</sub>
  2. GROUND
  3. V<sub>CC</sub>
  4. V<sub>1</sub>
  5. V<sub>2</sub>
  6. V<sub>EX</sub>

**CASE 867F-03**  
**ISSUE D**  
**UNIBODY PACKAGE**

## PACKAGE DIMENSIONS

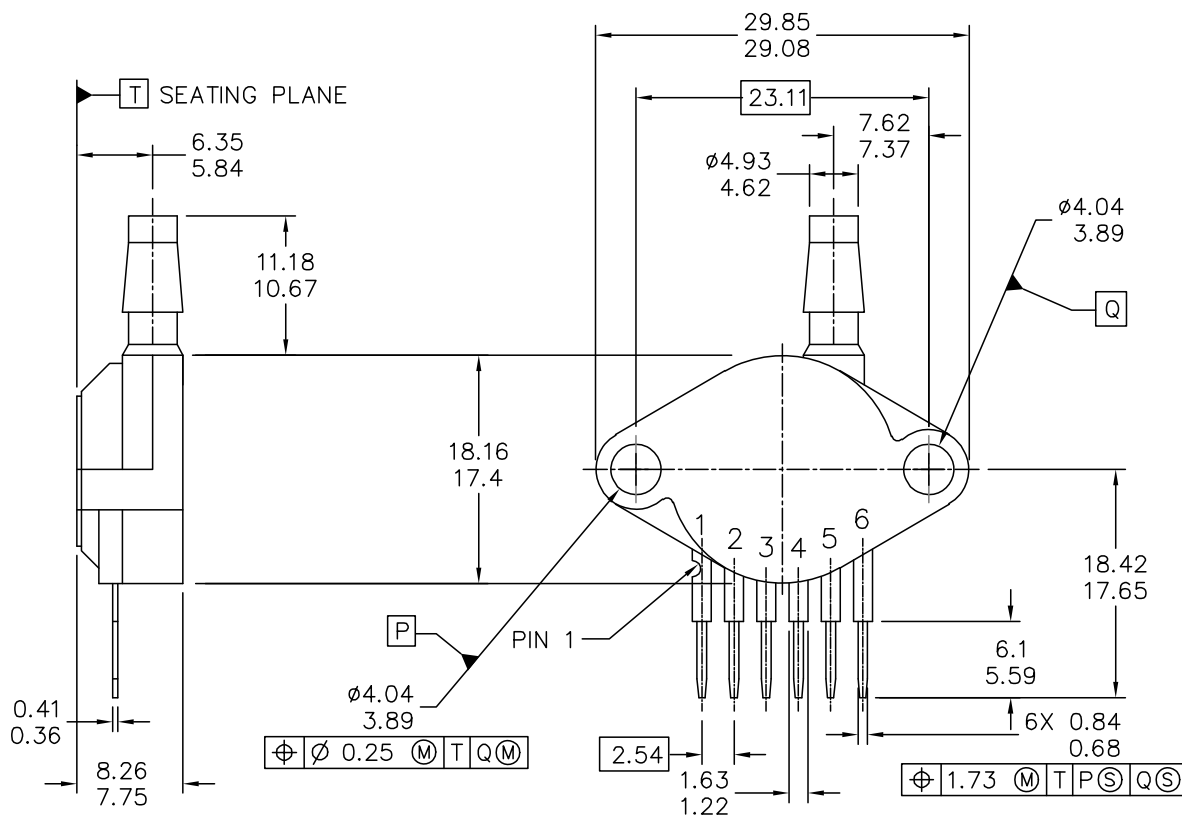

|                                                                   |                           |             |                            |
|-------------------------------------------------------------------|---------------------------|-------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.           | <b>MECHANICAL OUTLINE</b> |             | PRINT VERSION NOT TO SCALE |
| TITLE:<br><br>SENSOR, 6 LEAD UNIBODY CELL,<br>AP & GP 01ASB09087B | DOCUMENT NO: 98ASB42796B  | REV: G      |                            |
|                                                                   | CASE NUMBER: 867B-04      | 28 JUL 2005 |                            |
|                                                                   | STANDARD: NON-JEDEC       |             |                            |

PAGE 1 OF 2

**CASE 867B-04  
ISSUE G  
UNIBODY PACKAGE**

**PACKAGE DIMENSIONS**

## NOTES:

1. DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
3. 867B-01 THRU -3 OBSOLETE, NEW STANDARD 867B-04.

## STYLE 1:


PIN 1: V OUT  
2: GROUND  
3: VCC  
4: V1  
5: V2  
6: V EX

|                                                                   |  |                    |                          |                            |             |
|-------------------------------------------------------------------|--|--------------------|--------------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.           |  | MECHANICAL OUTLINE |                          | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br><br>SENSOR, 6 LEAD UNIBODY CELL,<br>AP & GP 01ASB09087B |  |                    | DOCUMENT NO: 98ASB42796B |                            | REV: G      |
|                                                                   |  |                    | CASE NUMBER: 867B-04     |                            | 28 JUL 2005 |
|                                                                   |  |                    | STANDARD: NON-JEDEC      |                            |             |

PAGE 2 OF 2

**CASE 867B-04  
ISSUE G  
UNIBODY PACKAGE**

# PACKAGE DIMENSIONS

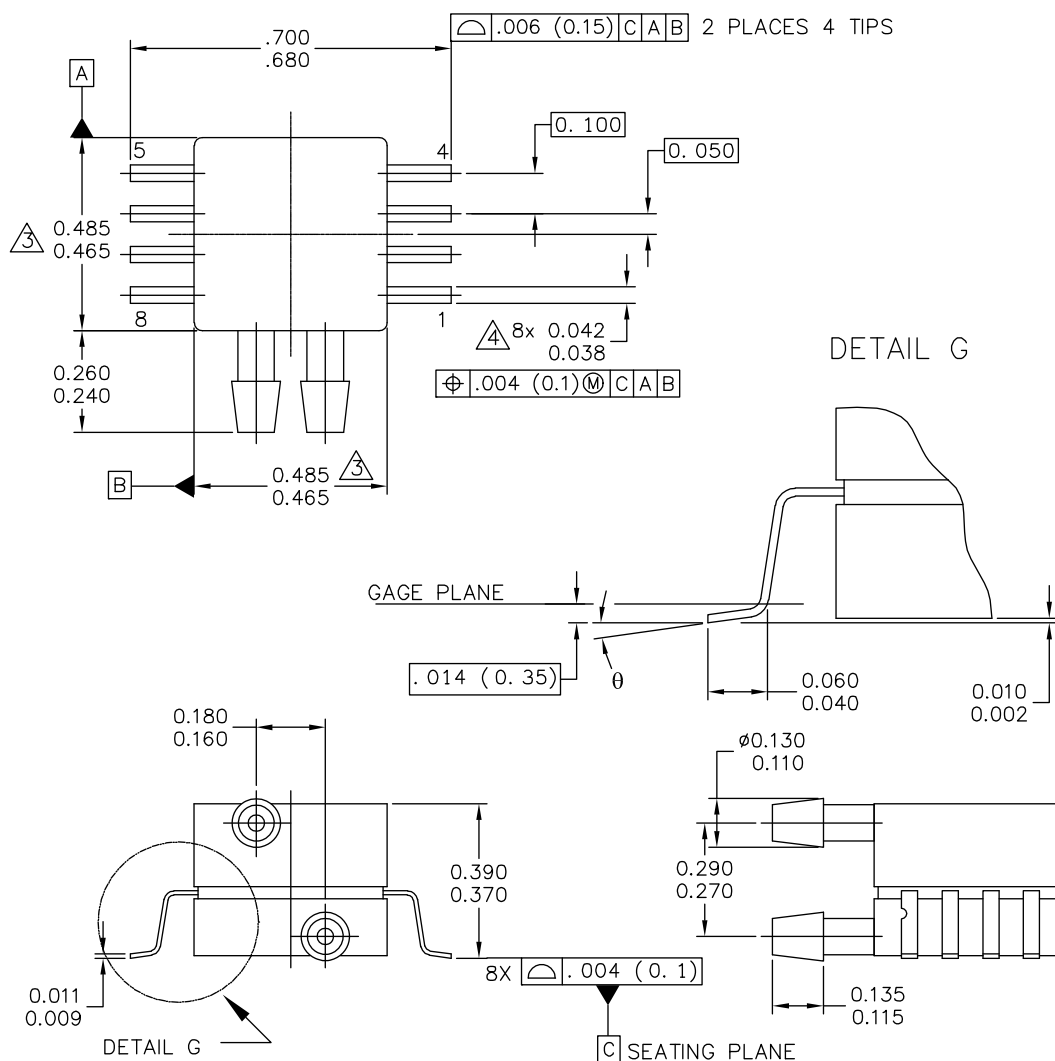

|                                                         |                           |                            |
|---------------------------------------------------------|---------------------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |
| TITLE:<br><br>8 LD SNRS, DUAL PORT                      | DOCUMENT NO: 98ASA99255D  | REV: A                     |
|                                                         | CASE NUMBER: 1351-01      | 27 JUL 2005                |
|                                                         | STANDARD: NON-JEDEC       |                            |

PAGE 1 OF 2

**CASE 1351-01**  
**ISSUE A**  
**SMALL OUTLINE PACKAGE**

MPX5010

**PACKAGE DIMENSIONS**

## NOTES:

1. CONTROLLING DIMENSION: INCH
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.

3. DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH AND PROTRUSIONS SHALL NOT EXCEED .006 PER SIDE.

4. DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR  
PROTRUSION SHALL BE .008 MAXIMUM.

## STYLE 1:

PIN 1: GND  
PIN 2: +Vout  
PIN 3: Vs  
PIN 4: -Vout  
PIN 5: N/C  
PIN 6: N/C  
PIN 7: N/C  
PIN 8: N/C

## STYLE 2:


PIN 1: N/C  
PIN 2: Vs  
PIN 3: GND  
PIN 4: Vout  
PIN 5: N/C  
PIN 6: N/C  
PIN 7: N/C  
PIN 8: N/C

|                                                         |  |                          |  |                            |  |
|---------------------------------------------------------|--|--------------------------|--|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. |  | MECHANICAL OUTLINE       |  | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>8 LD SNSR, DUAL PORT                      |  | DOCUMENT NO: 98ASA99255D |  | REV: A                     |  |
|                                                         |  | CASE NUMBER: 1351-01     |  | 27 JUL 2005                |  |
|                                                         |  | STANDARD: NON-JEDEC      |  |                            |  |

PAGE 2 OF 2

**CASE 1351-01  
ISSUE A  
SMALL OUTLINE PACKAGE**

# PACKAGE DIMENSIONS

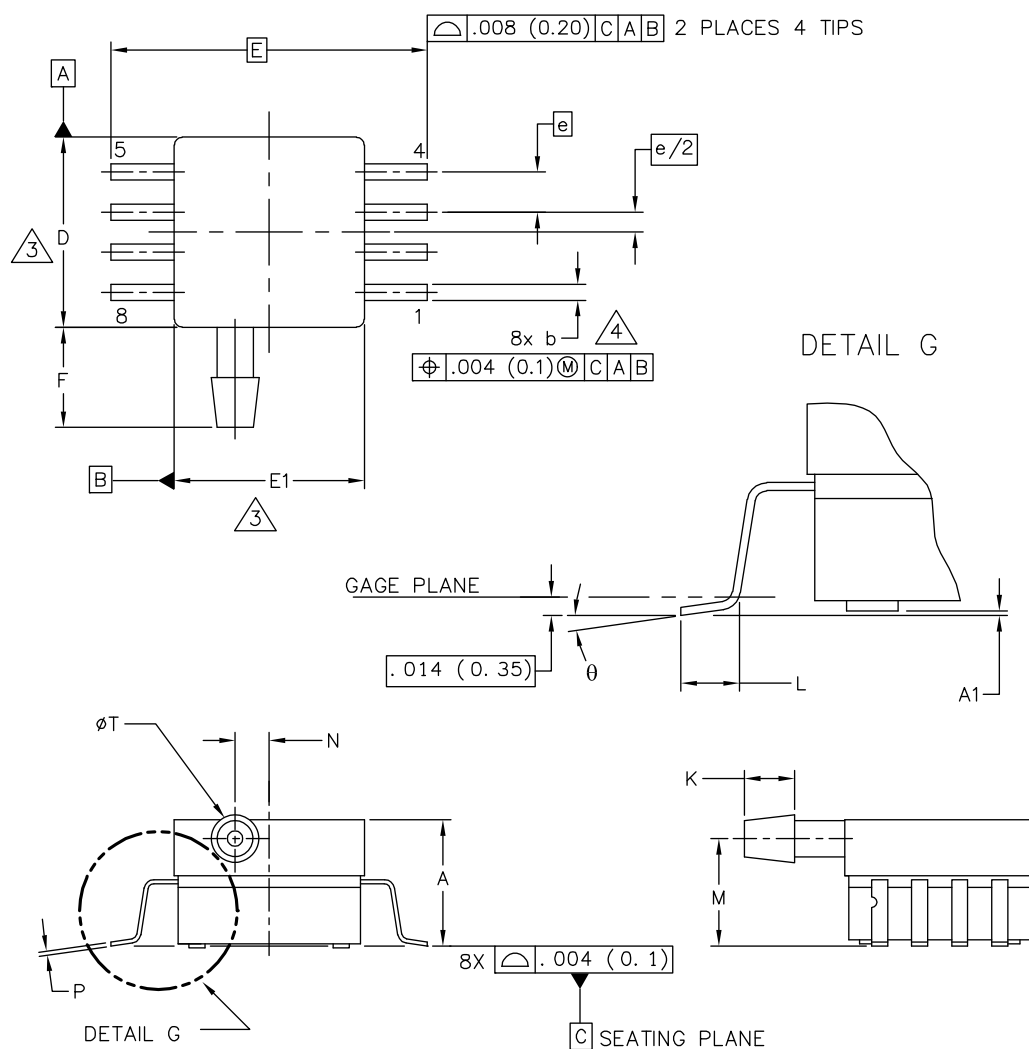

|                                                         |                           |                            |
|---------------------------------------------------------|---------------------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |
| TITLE:<br><br>8 LD SOP, SIDE PORT                       | DOCUMENT NO: 98ASA99303D  | REV: B                     |
|                                                         | CASE NUMBER: 1369-01      | 24 MAY 2005                |
|                                                         | STANDARD: NON-JEDEC       |                            |

PAGE 1 OF 2

**CASE 1369-01**  
**ISSUE B**  
**SMALL OUTLINE PACKAGE**

MPX5010

# PACKAGE DIMENSIONS

## NOTES:

1. CONTROLLING DIMENSION: INCH

2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.

③ DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH AND PROTRUSIONS SHALL NOT EXCEED .006 (0.152) PER SIDE.


④ DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 (0.203) MAXIMUM.

| DIM                                                     | INCHES   |      | MILLIMETERS        |       | DIM                      | INCHES                     |     | MILLIMETERS |     |
|---------------------------------------------------------|----------|------|--------------------|-------|--------------------------|----------------------------|-----|-------------|-----|
|                                                         | MIN      | MAX  | MIN                | MAX   |                          | MIN                        | MAX | MIN         | MAX |
| A                                                       | .300     | .330 | 7.11               | 7.62  | θ                        | 0°                         | 7°  | 0°          | 7°  |
| A1                                                      | .002     | .010 | 0.05               | 0.25  | —                        | ---                        | --- | ---         | --- |
| b                                                       | .038     | .042 | 0.96               | 1.07  | —                        | ---                        | --- | ---         | --- |
| D                                                       | .465     | .485 | 11.81              | 12.32 | —                        | ---                        | --- | ---         | --- |
| E                                                       | .717 BSC |      | 18.21 BSC          |       | —                        | ---                        | --- | ---         | --- |
| E1                                                      | .465     | .485 | 11.81              | 12.32 | —                        | ---                        | --- | ---         | --- |
| e                                                       | .100 BSC |      | 2.54 BSC           |       | —                        | ---                        | --- | ---         | --- |
| F                                                       | .245     | .255 | 6.22               | 6.47  | —                        | ---                        | --- | ---         | --- |
| K                                                       | .120     | .130 | 3.05               | 3.30  | —                        | ---                        | --- | ---         | --- |
| L                                                       | .061     | .071 | 1.55               | 1.80  | —                        | ---                        | --- | ---         | --- |
| M                                                       | .270     | .290 | 6.86               | 7.36  | —                        | ---                        | --- | ---         | --- |
| N                                                       | .080     | .090 | 2.03               | 2.28  | —                        | ---                        | --- | ---         | --- |
| P                                                       | .009     | .011 | 0.23               | 0.28  | —                        | ---                        | --- | ---         | --- |
| T                                                       | .115     | .125 | 2.92               | 3.17  | —                        | ---                        | --- | ---         | --- |
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. |          |      | MECHANICAL OUTLINE |       |                          | PRINT VERSION NOT TO SCALE |     |             |     |
| TITLE:<br><br>8 LD SOP, SIDE PORT                       |          |      |                    |       | DOCUMENT NO: 98ASA99303D |                            |     | REV: B      |     |
|                                                         |          |      |                    |       | CASE NUMBER: 1369-01     |                            |     | 24 MAY 2005 |     |
|                                                         |          |      |                    |       | STANDARD: NON-JEDEC      |                            |     |             |     |

PAGE 2 OF 2


**CASE 1369-01  
ISSUE B  
SMALL OUTLINE PACKAGE**

# PACKAGE DIMENSIONS

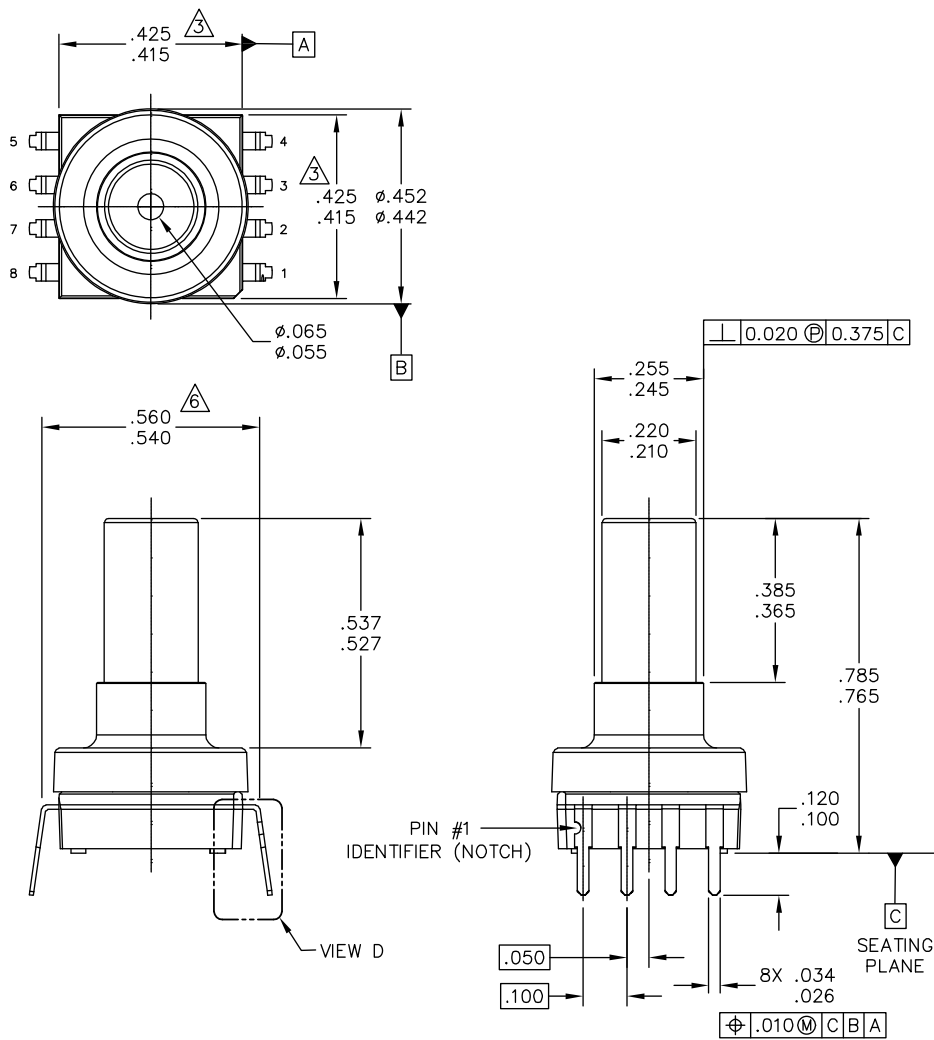

|                                                            |  |                          |  |                            |  |
|------------------------------------------------------------|--|--------------------------|--|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.    |  | MECHANICAL OUTLINE       |  | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>SO, 8 I/O, .420 X .420 PKG,<br>.100 IN PITCH |  | DOCUMENT NO: 98ASA10611D |  | REV: D                     |  |
|                                                            |  | CASE NUMBER: 1560-03     |  | 25 FEB 2009                |  |
|                                                            |  | STANDARD: NON-JEDEC      |  |                            |  |

PACKAGE DIMENSIONS

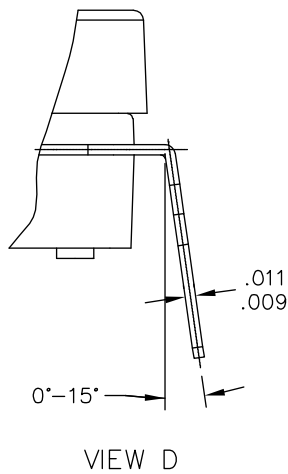

|                                                            |  |                          |  |                            |  |
|------------------------------------------------------------|--|--------------------------|--|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.    |  | MECHANICAL OUTLINE       |  | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>SO, 8 I/O, .420 X .420 PKG,<br>.100 IN PITCH |  | DOCUMENT NO: 98ASA10611D |  | REV: D                     |  |
|                                                            |  | CASE NUMBER: 1560-03     |  | 25 FEB 2009                |  |
|                                                            |  | STANDARD: NON-JEDEC      |  |                            |  |

CASE 1560-03  
ISSUE D  
SMALL OUTLINE PACKAGE

# PACKAGE DIMENSIONS

## NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M – 1994.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSIONS DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION IS .006.
5. ALL VERTICAL SURFACES 5° TYPICAL DRAFT.
6. DIMENSION TO CENTER OF LEAD WHEN FORMED PARALLEL.

|                                                         |                           |                            |             |
|---------------------------------------------------------|---------------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br>SO, 8 I/O, .420 X .420 PKG,<br>.100 IN PITCH  | DOCUMENT NO: 98ASA10611D  |                            | REV: D      |
|                                                         | CASE NUMBER: 1560-03      |                            | 25 FEB 2009 |
|                                                         | STANDARD: NON-JEDEC       |                            |             |

PAGE 3 OF 3

**CASE 1560-03**  
**ISSUE D**  
**SMALL OUTLINE PACKAGE**

# PACKAGE DIMENSIONS

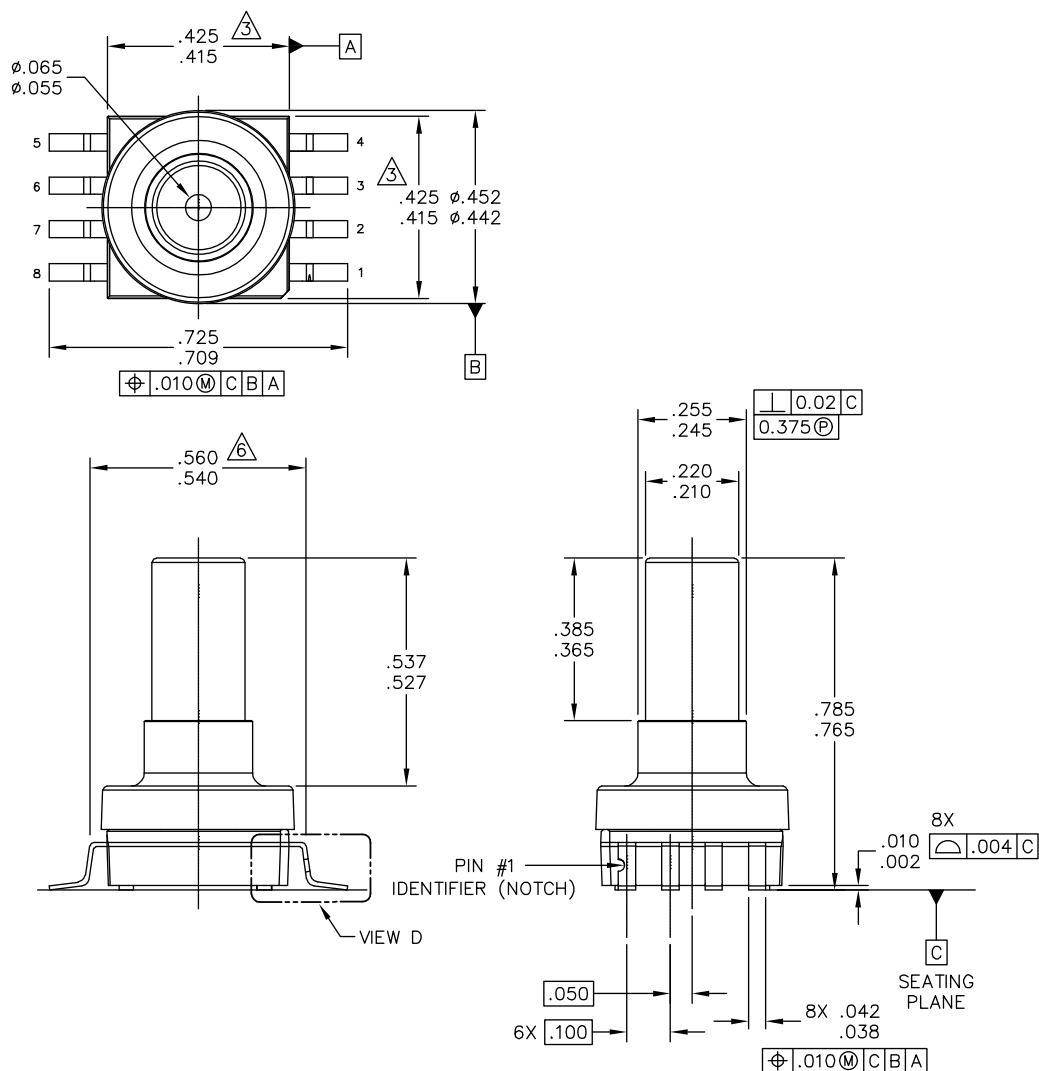


|                                                         |                          |                            |
|---------------------------------------------------------|--------------------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | MECHANICAL OUTLINE       | PRINT VERSION NOT TO SCALE |
| TITLE:<br>SO, 8 I/O, .420 X .420 PKG,<br>.100 IN PITCH  | DOCUMENT NO: 98ASA10686D | REV: B                     |
|                                                         | CASE NUMBER: 1735-02     | 19 FEB 2009                |
|                                                         | STANDARD: NON-JEDEC      |                            |

PAGE 1 OF 3

**CASE 1735-02  
ISSUE B  
SMALL OUTLINE PACKAGE**

PACKAGE DIMENSIONS

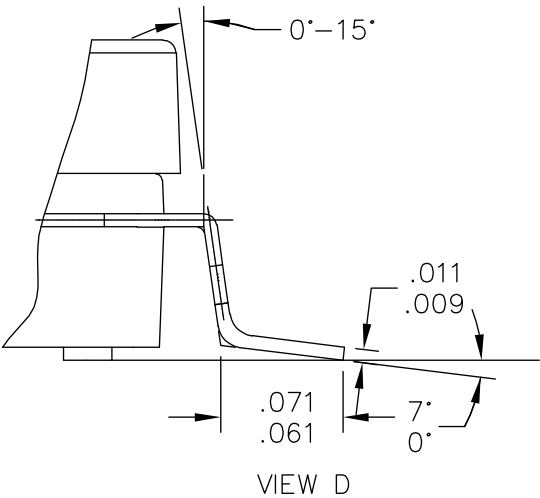

|                                                            |  |                          |  |                            |  |
|------------------------------------------------------------|--|--------------------------|--|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.    |  | MECHANICAL OUTLINE       |  | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>SO, 8 I/O, .420 X .420 PKG,<br>.100 IN PITCH |  | DOCUMENT NO: 98ASA10686D |  | REV: B                     |  |
|                                                            |  | CASE NUMBER: 1735-02     |  | 19 FEB 2009                |  |
|                                                            |  | STANDARD: NON-JEDEC      |  |                            |  |

CASE 1735-02  
ISSUE B  
SMALL OUTLINE PACKAGE

## PACKAGE DIMENSIONS

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M – 1994.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSIONS DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION IS .006.
5. ALL VERTICAL SURFACES 5° TYPICAL DRAFT.
6. DIMENSION TO CENTER OF LEAD WHEN FORMED PARALLEL.

|                                                            |  |                          |  |                            |  |
|------------------------------------------------------------|--|--------------------------|--|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.    |  | MECHANICAL OUTLINE       |  | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>SO, 8 I/O, .420 X .420 PKG,<br>.100 IN PITCH |  | DOCUMENT NO: 98ASA10686D |  | REV: B                     |  |
|                                                            |  | CASE NUMBER: 1735-02     |  | 19 FEB 2009                |  |
|                                                            |  | STANDARD: NON-JEDEC      |  |                            |  |

PAGE 3 OF 3

**CASE 1735-02  
ISSUE B  
SMALL OUTLINE PACKAGE**

**Table 3. Revision History**

| Revision number | Revision date | Description of changes                                                                                                                                         |
|-----------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 13              | 10/2012       | <ul style="list-style-type: none"> <li>Deleted references to device number MPVZ5010G6T1, MPVZ5010G6U/T1 and MPVZ5010G6U/6T1 throughout the document</li> </ul> |

### ***How to Reach Us:***

**Home Page:**  
freescale.com

**Web Support:**  
freescale.com/support

Information in this document is provided solely to enable system and software implementers to use Freescale products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document.

Freescale reserves the right to make changes without further notice to any products herein. Freescale makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. Freescale does not convey any license under its patent rights nor the rights of others. Freescale sells products pursuant to standard terms and conditions of sale, which can be found at the following address: [freescale.com/salestermsandconditions](http://freescale.com/salestermsandconditions).

Freescale, the Freescale logo, Energy Efficient Solutions logo, are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. Xtrinsic is a trademark of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.

© 2012 Freescale Semiconductor, Inc.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)