


High Efficiency Thyristor

V_{RRM} = 1200 V
 I_{TAV} = 15 A
 V_T = 1.35 V



Two Quadrants Operation QI & QII
Single Thyristor with two gate polarities

Part number

CLA15E1200NPB

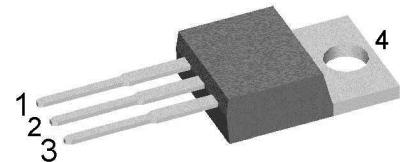

Backside: anode

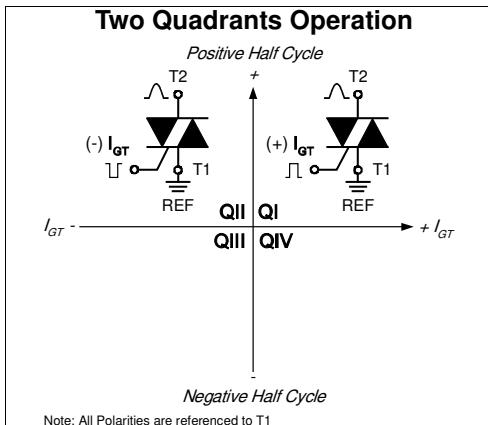

Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Two gate current polarities usable
 - positive -> quadrant I
 - negative -> quadrant II

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-220

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Thyristor

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1200	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1200 \text{ V}$ $V_{R/D} = 1200 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		10 1.5	μA mA
V_T	forward voltage drop	$I_T = 15 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$		1.35	V
		$I_T = 30 \text{ A}$			1.68	V
		$I_T = 15 \text{ A}$	$T_{VJ} = 125^\circ\text{C}$		1.35	V
		$I_T = 30 \text{ A}$			1.79	V
I_{TAV}	average forward current	$T_C = 120^\circ\text{C}$	$T_{VJ} = 150^\circ\text{C}$		15	A
$I_{T(RMS)}$	RMS forward current	180° sine			33	A
V_{T0}	threshold voltage	$\left. \begin{array}{l} \text{slope resistance} \\ \end{array} \right\} \text{for power loss calculation only}$	$T_{VJ} = 150^\circ\text{C}$		0.89	V
r_T	slope resistance				30	$\text{m}\Omega$
R_{thJC}	thermal resistance junction to case				0.95	K/W
R_{thCH}	thermal resistance case to heatsink			0.5		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ\text{C}$		130	W
I_{TSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$		170	A
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		185	A
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 150^\circ\text{C}$		145	A
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		155	A
I^2t	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$		145	A^2s
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		140	A^2s
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 150^\circ\text{C}$		105	A^2s
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		100	A^2s
C_J	junction capacitance	$V_R = 400 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ\text{C}$	4		pF
P_{GM}	max. gate power dissipation	$t_p = 30 \mu\text{s}$	$T_C = 150^\circ\text{C}$		5	W
		$t_p = 300 \mu\text{s}$			1	W
P_{GAV}	average gate power dissipation				0.2	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 150^\circ\text{C}; f = 50 \text{ Hz}$ repetitive, $I_T = 45 \text{ A}$			150	$\text{A}/\mu\text{s}$
		$t_p = 200 \mu\text{s}; di_G/dt = 0.3 \text{ A}/\mu\text{s};$ $I_G = 0.3 \text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 15 \text{ A}$			500	$\text{A}/\mu\text{s}$
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 150^\circ\text{C}$		500	$\text{V}/\mu\text{s}$
		$R_{GK} = \infty$; method 1 (linear voltage rise)				
V_{GT}	gate trigger voltage	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$		1.3	V
			$T_{VJ} = -40^\circ\text{C}$		1.6	V
I_{GT}	gate trigger current	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$		± 20	mA
			$T_{VJ} = -40^\circ\text{C}$		± 40	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 150^\circ\text{C}$		0.2	V
I_{GD}	gate non-trigger current				± 1	mA
I_L	latching current	$t_p = 10 \mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$		70	mA
		$I_G = 0.3 \text{ A}; di_G/dt = 0.3 \text{ A}/\mu\text{s}$				
I_H	holding current	$V_D = 6 \text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ\text{C}$		70	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^\circ\text{C}$		2	μs
		$I_G = 0.3 \text{ A}; di_G/dt = 0.3 \text{ A}/\mu\text{s}$				
t_q	turn-off time	$V_R = 100 \text{ V}; I_T = 15 \text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^\circ\text{C}$	$di/dt = 10 \text{ A}/\mu\text{s}$ $dv/dt = 20 \text{ V}/\mu\text{s}$ $t_p = 200 \mu\text{s}$	150		μs

Package TO-220

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
I_{RMS}	<i>RMS current</i>	per terminal			35	A
T_{VJ}	<i>virtual junction temperature</i>		-40		150	°C
T_{op}	<i>operation temperature</i>		-40		125	°C
T_{stg}	<i>storage temperature</i>		-40		150	°C
Weight				2		g
M_d	<i>mounting torque</i>		0.4		0.6	Nm
F_c	<i>mounting force with clip</i>		20		60	N

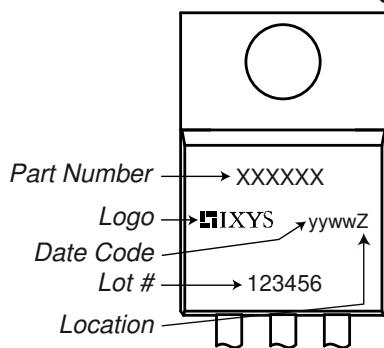
Product Marking

Part description


C = Thyristor (SCR)
 L = High Efficiency Thyristor
 A = (up to 1200V)
 15 = Current Rating [A]
 E = Single Thyristor with two gate polarities
 1200 = Reverse Voltage [V]
 N = Three Quadrants operation: QI - QIII
 PB = TO-220AB (3)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	CLA15E1200NPB	CLA15E1200NPB	Tube	50	517515


Similar Part	Package	Voltage class
CLA15E1200NPZ	TO-263AB (D2Pak) (2HV)	1200

Equivalent Circuits for Simulation
** on die level*
 $T_{VJ} = 150^\circ\text{C}$

	Thyristor	
$V_{0 \max}$	threshold voltage	0.89 V
$R_{0 \max}$	slope resistance *	27 mΩ

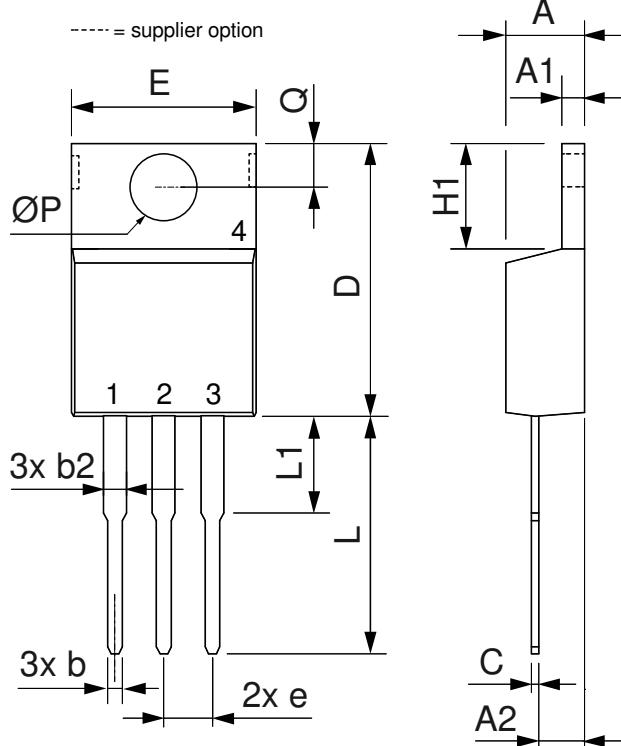Outlines TO-220


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	2.54	BSC	0.100	BSC
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
ØP	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125



Thyristor

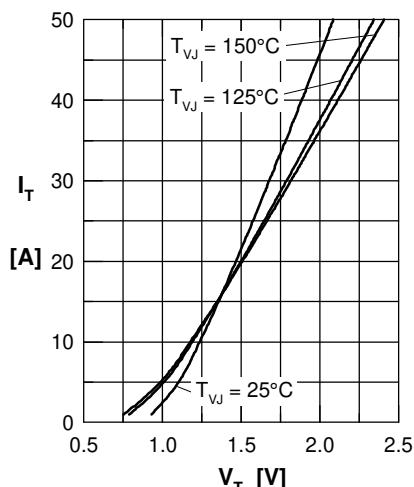


Fig. 1 Forward characteristics

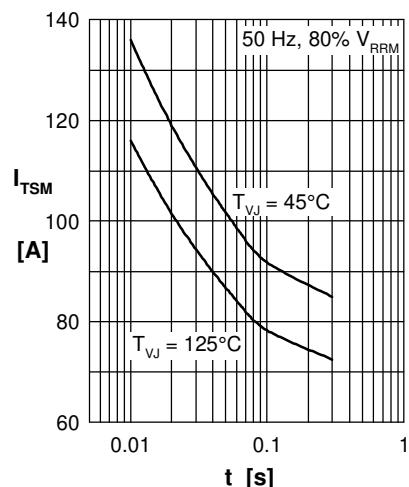


Fig. 2 Surge overload current

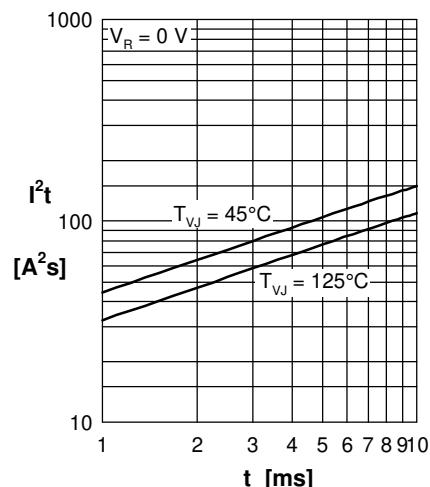


Fig. 3 I^2t versus time (1-10 ms)

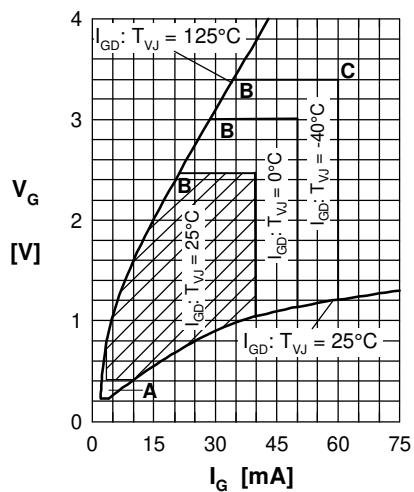


Fig. 4 Gate trigger characteristics

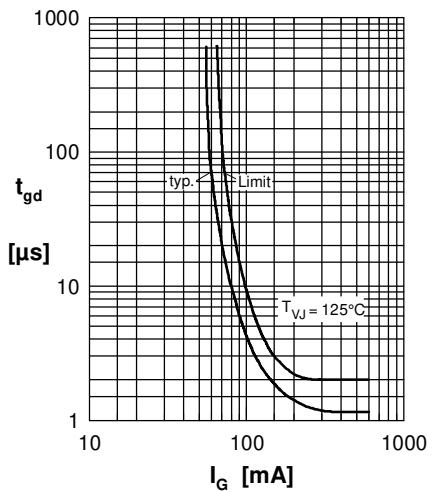


Fig. 5 Gate controlled delay time

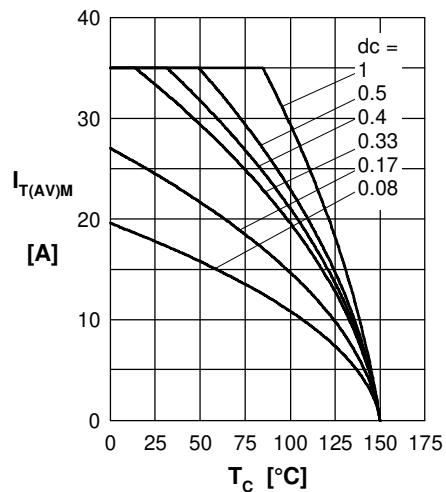


Fig. 6 Max. forward current at case temperature

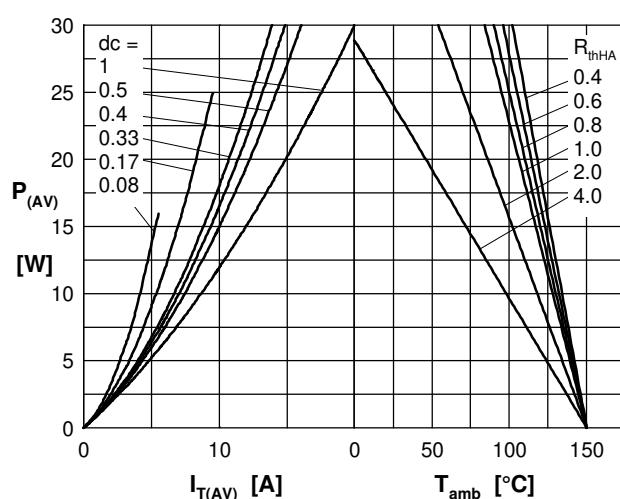


Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

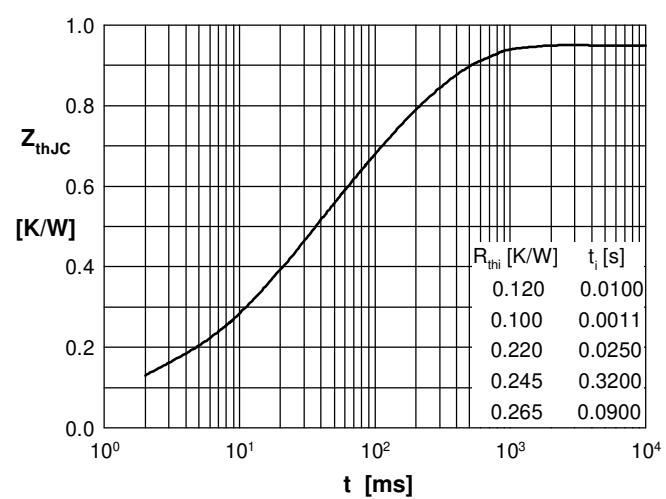


Fig. 8 Transient thermal impedance

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru