

# MAGX-000035-015000

# MAGX-000035-01500S



GaN on SiC HEMT Pulsed Power Transistor  
15 W, DC - 3.5 GHz

Rev. V1

## Features

- GaN on SiC Depletion Mode Transistor
- Common-Source Configuration
- Broadband Class AB Operation
- Thermally Enhanced Package (Flanged: Cu/W, Flangeless: Cu)
- RoHS\* Compliant
- +50V Typical Operation
- MTTF = 600 years ( $T_J < 200^\circ\text{C}$ )

## Primary Applications

- Commercial Wireless Infrastructure (WCDMA, LTE, WiMAX)
- Air Traffic Control Radar - Commercial
- Weather Radar - Commercial
- Military Radar - Military
- Public Radio
- Industrial, Scientific and Medical
- SATCOM
- Instrumentation

## Description

The MAGX-000035-01500X is a gold-metalized unmatched Gallium Nitride (GaN) on Silicon Carbide RF power transistor suitable for a variety of RF power amplifier applications. Using state of the art wafer fabrication processes, these high performance transistors provide high gain, efficiency, bandwidth, and ruggedness over multiple octave bandwidths for today's demanding application needs.

The MAGX-000035-01500X is constructed using a thermally enhanced flanged (Cu/W) or flangeless (Cu) ceramic package which provides excellent thermal performance. High breakdown voltages allow for reliable and stable operation in extreme mismatched load conditions unparalleled with older semiconductor technologies.

## MAGX-000035-015000 (Flanged)



## MAGX-000035-01500S (Flangeless)



## Ordering Information

Part Number	Description
MAGX-000035-015000	Flanged, Bulk Packaging
MAGX-000035-01500S	Flangeless, Bulk Packaging
MAGX-L20035-015000	Sample Board (1.2 - 1.4 GHz, Flanged)
MAGX-L20035-01500S	Sample Board (1.2 - 1.4 GHz, Flangeless)

1 \* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

# MAGX-000035-015000

# MAGX-000035-01500S



GaN on SiC HEMT Pulsed Power Transistor  
15 W, DC - 3.5 GHz

Rev. V1

## Electrical Specifications<sup>1</sup>: Freq. = 1.2 - 1.4 GHz, T<sub>A</sub> = 25°C

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
<b>RF Functional Tests: V<sub>DD</sub> = 50 V, I<sub>DQ</sub> = 15 mA, 1 ms Pulse, 10% Duty</b>						
Output Power	P <sub>IN</sub> = 0.5 W	P <sub>OUT</sub>	15.0	17.7	-	W
Power Gain	P <sub>IN</sub> = 0.5 W	G <sub>P</sub>	14.8	15.5	-	dB
Drain Efficiency	P <sub>IN</sub> = 0.5 W	η <sub>D</sub>	55	63	-	%
Droop	P <sub>IN</sub> = 0.5 W	Droop	-	0.1	0.4	dB
Load Mismatch Stability	P <sub>IN</sub> = 0.5 W	VSWR-S	-	5:1	-	-
Load Mismatch Tolerance	P <sub>IN</sub> = 0.5 W	VSWR-T	-	10:1	-	-

## Electrical Characteristics: T<sub>A</sub> = 25°C

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
<b>DC Characteristics</b>						
Drain-Source Leakage Current	V <sub>GS</sub> = -8 V, V <sub>DS</sub> = 175 V	I <sub>DS</sub>	-	-	750	μA
Gate Threshold Voltage	V <sub>DS</sub> = 5 V, I <sub>D</sub> = 2 mA	V <sub>GS(TH)</sub>	-5	-3	-2	V
Forward Transconductance	V <sub>DS</sub> = 5 V, I <sub>D</sub> = 500 mA	G <sub>M</sub>	0.35	-	-	S
<b>Dynamic Characteristics</b>						
Input Capacitance	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = -8 V, F = 1 MHz	C <sub>ISS</sub>	-	4.4	-	pF
Output Capacitance	V <sub>DS</sub> = 50 V, V <sub>GS</sub> = -8 V, F = 1 MHz	C <sub>OSS</sub>	-	1.9	-	pF
Reverse Transfer Capacitance	V <sub>DS</sub> = 50 V, V <sub>GS</sub> = -8 V, F = 1 MHz	C <sub>RSS</sub>	-	0.2	-	pF

## Correct Device Sequencing

### Turning the device ON

1. Set V<sub>GS</sub> to the pinch-off (V<sub>P</sub>), typically -5 V.
2. Turn on V<sub>DS</sub> to nominal voltage (+50V).
3. Increase V<sub>GS</sub> until the I<sub>DS</sub> current is reached.
4. Apply RF power to desired level.

### Turning the device OFF

1. Turn the RF power off.
2. Decrease V<sub>GS</sub> down to V<sub>P</sub>.
3. Decrease V<sub>DS</sub> down to 0 V.
4. Turn off V<sub>GS</sub>.

1. Electrical Specifications measured in MACOM RF evaluation board.

# MAGX-000035-015000

# MAGX-000035-01500S



GaN on SiC HEMT Pulsed Power Transistor  
15 W, DC - 3.5 GHz

Rev. V1

## Absolute Maximum Ratings<sup>2,3,4</sup>

Parameter	Absolute Max.
Input Power	$P_{IN}$ (nominal) + 3 dB
Drain Supply Voltage, $V_{DD}$	+65 V
Gate Supply Voltage, $V_{GG}$	-8 V to 0 V
Supply Current, $I_{DD}$	800 mA
Power Dissipation ( $P_{AVG}$ ), Pulsed @ 85°C	10.3 W
MTTF ( $T_J < 200^\circ\text{C}$ )	600 years
Junction Temperature <sup>5</sup>	200°C
Operating Temperature	-40°C to +95°C
Storage Temperature	-65°C to +150°C
Mounting Temperature	See solder reflow profile
ESD Min. - Charged Device Model (CDM)	150 V
ESD Min. - Human Body Model (HBM)	500 V

2. Operation of this device above any one of these parameters may cause permanent damage.
3. Channel temperature directly affects a device's MTTF. Channel temperature should be kept as low as possible to maximize lifetime.
4. For saturated performance it is recommended that the sum of  $(3 \cdot V_{DD} + \text{abs}(V_{GG})) < 175 \text{ V}$ .
5. Junction Temperature ( $T_J$ ) =  $T_C + \theta_{JC} \cdot ((V \cdot I) - (P_{OUT} - P_{IN}))$

Typical transient thermal resistances:

1 ms pulse, 10% duty cycle,  $\theta_{JC} = 5.0^\circ\text{C/W}$

For  $T_C = 85^\circ\text{C}$ ,

$T_J = 132^\circ\text{C}$  @ 50 V, 520 mA-pk,  $P_{OUT} = 17.0 \text{ W}$ ,  $P_{IN} = 0.5 \text{ W}$

# MAGX-000035-015000


# MAGX-000035-01500S



GaN on SiC HEMT Pulsed Power Transistor  
15 W, DC - 3.5 GHz


Rev. V1

Test Fixture Assembly (1.2 - 1.4 GHz, 1 ms Pulse, 10% Duty,  $V_{DD} = 50$  V,  $I_{dq} = 15$  mA)

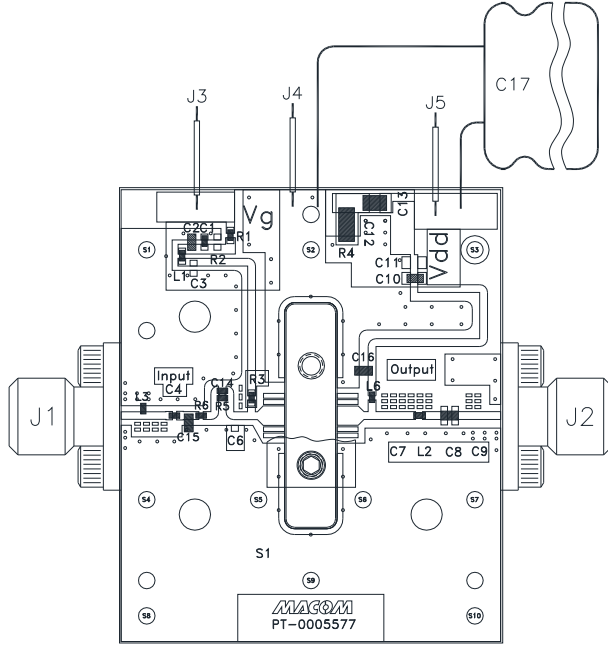

## Test Fixture Impedances

F (GHz)	$Z_{IF}$ ( $\Omega$ )	$Z_{OF}$ ( $\Omega$ )
1.2	$1.4 + j3.5$	$2.5 + j3.5$
1.3	$1.3 + j3.8$	$2.7 + j3.9$
1.4	$1.8 + j4.0$	$3.1 + j4.2$

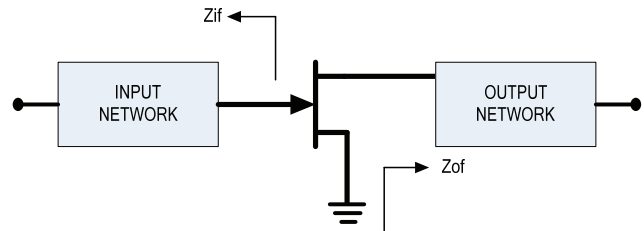

## Parts List

Reference Designator	Part	Vendor
C4	0402, 5.1 pF, $\pm 0.1$ pF	ATC
C15	0603, 6.8 pF, $\pm 0.1$ pF	ATC
C2	0603, 82 pF, $\pm 10\%$	ATC
C16	0603, 100 pF, $\pm 10\%$	ATC
C1, C10	0402, 1000 pF, 100 V, 5%	ATC
C8	0603, 30 pF, $\pm 10\%$	ATC
C13	0805, 1 $\mu$ F, 100 V, $\pm 20\%$	ATC
C14	0402, 12 pF, $\pm 10\%$	ATC
C17	100 $\mu$ F, 160 V, Electrolytic Capacitor	Panasonic
C3, C6, C7, C9, C11, C12, R2	Do Not Populate	-
R3	240 $\Omega$ , 0603, 5%	Panasonic
L1, R1	1.0 $\Omega$ , 0402, 5%	Panasonic
R4	1.0 $\Omega$ , 1206, 5%	Panasonic
R5	10 $\Omega$ , 0402, 5%	Panasonic
L3, L6	0402, 3.9 nH, 2%	Coilcraft
L2, R6	0402, 0.0 $\Omega$ Resistor	Panasonic
J1, J2	SMA Connector	Tyco Electronics

4 Contact factory for Gerber file or additional circuit information.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

- North America Tel: 800.366.2266 / Fax: 978.366.2266
- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298

# MAGX-000035-015000

# MAGX-000035-01500S



GaN on SiC HEMT Pulsed Power Transistor  
15 W, DC - 3.5 GHz


Rev. V1

## Application Section


### Typical Performance Curves

1.2 - 1.4 GHz, 1 ms Pulse, 10% Duty,  $V_{DD} = 50\text{ V}$ ,  $I_{dq} = 15\text{ mA}$ ,  $T_A = 25^\circ\text{C}$

**Output Power and Gain Vs. Input Power**

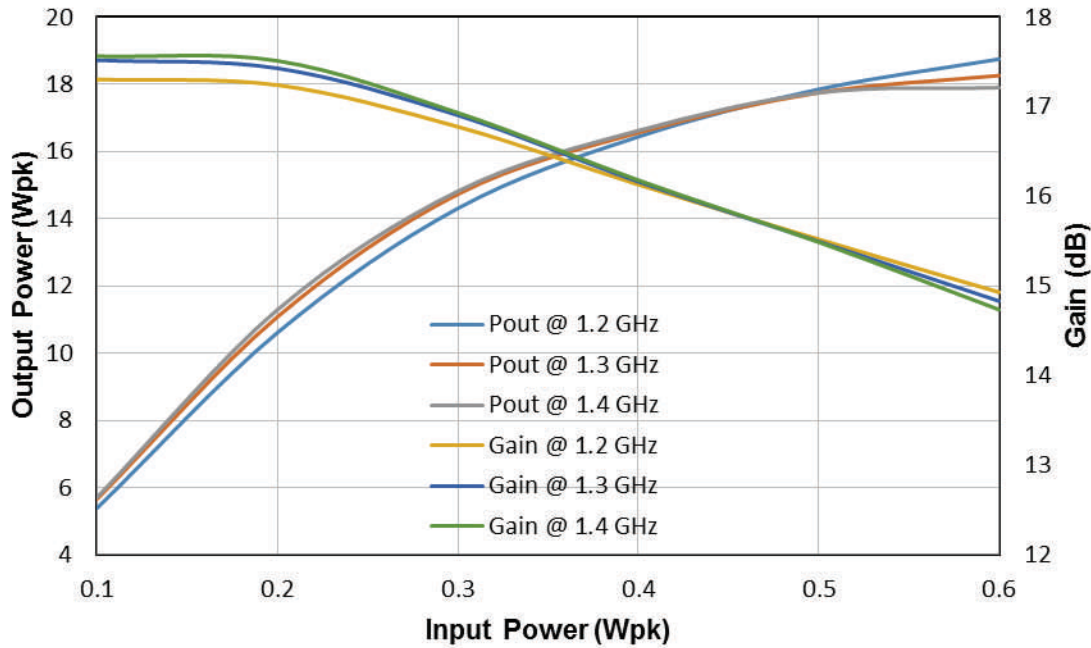

**Drain Efficiency Vs. Output Power**

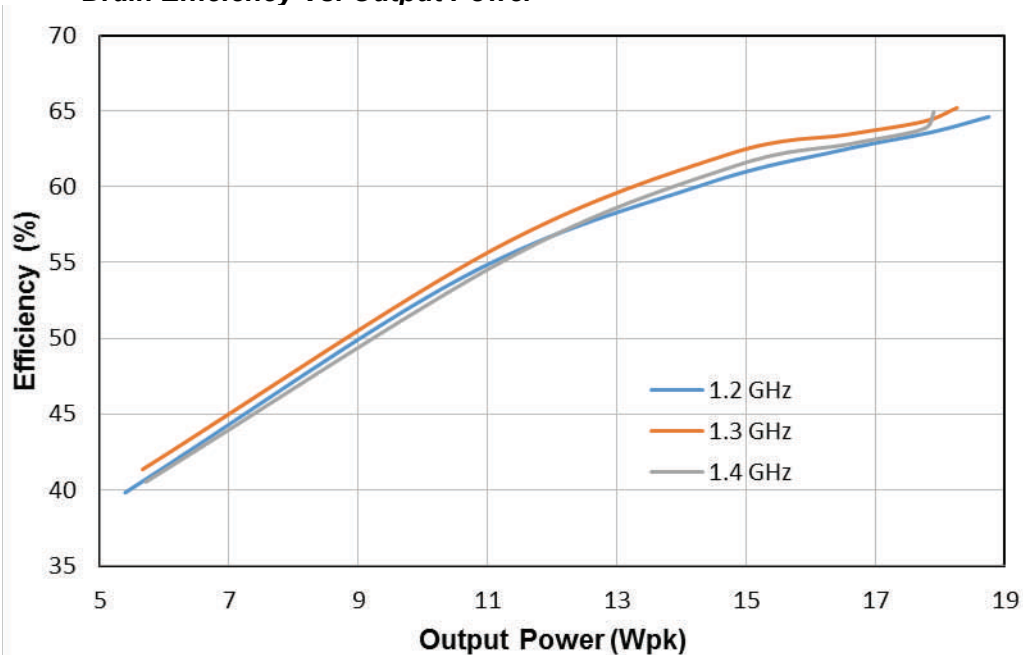

# MAGX-000035-015000


# MAGX-000035-01500S



GaN on SiC HEMT Pulsed Power Transistor  
15 W, DC - 3.5 GHz

Rev. V1

## Outline Drawing MAGX-000035-015000 (Flanged)

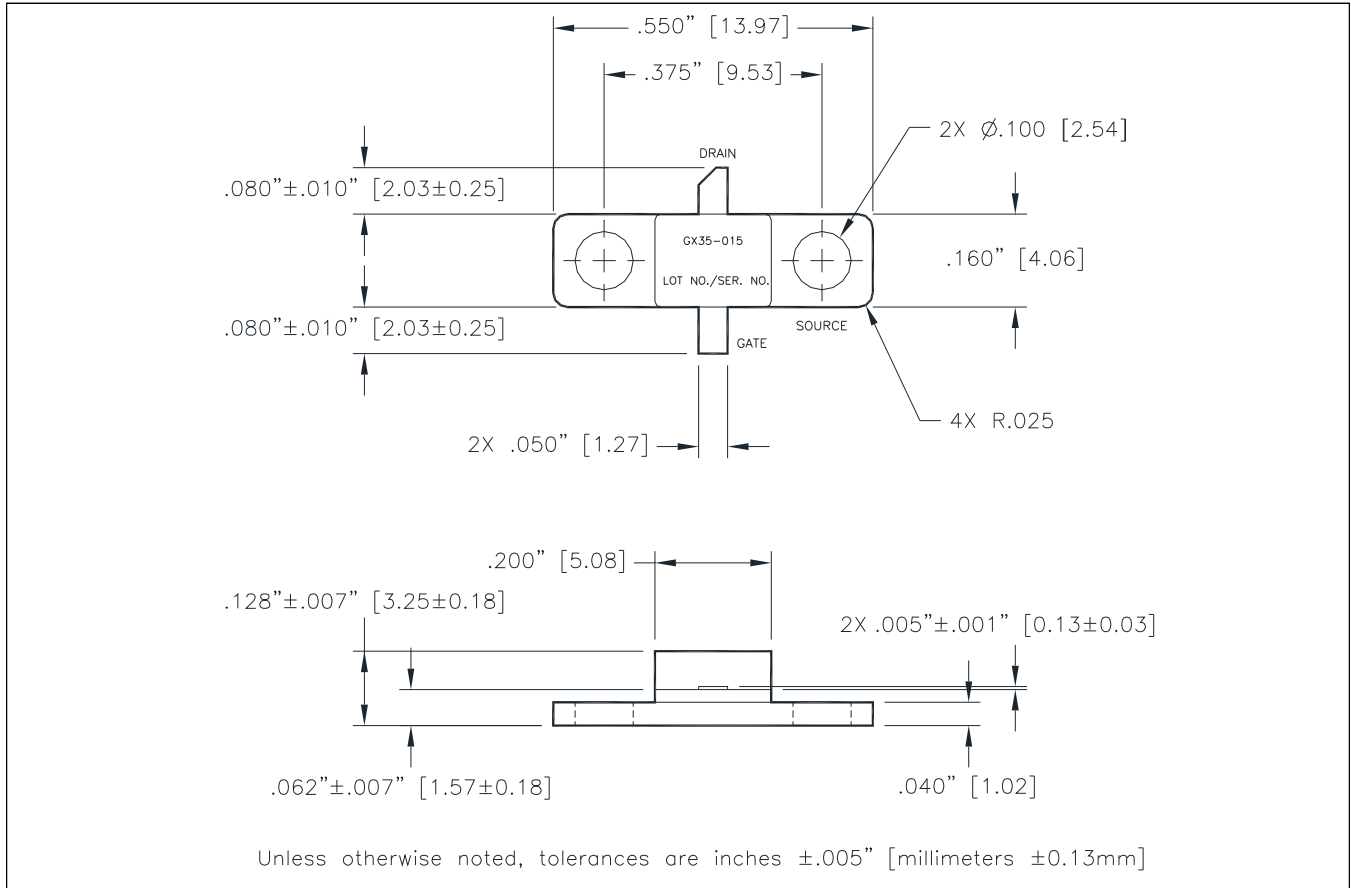

# MAGX-000035-015000


# MAGX-000035-01500S



GaN on SiC HEMT Pulsed Power Transistor  
15 W, DC - 3.5 GHz

Rev. V1

## Outline Drawing MAGX-000035-01500S (Flangeless)

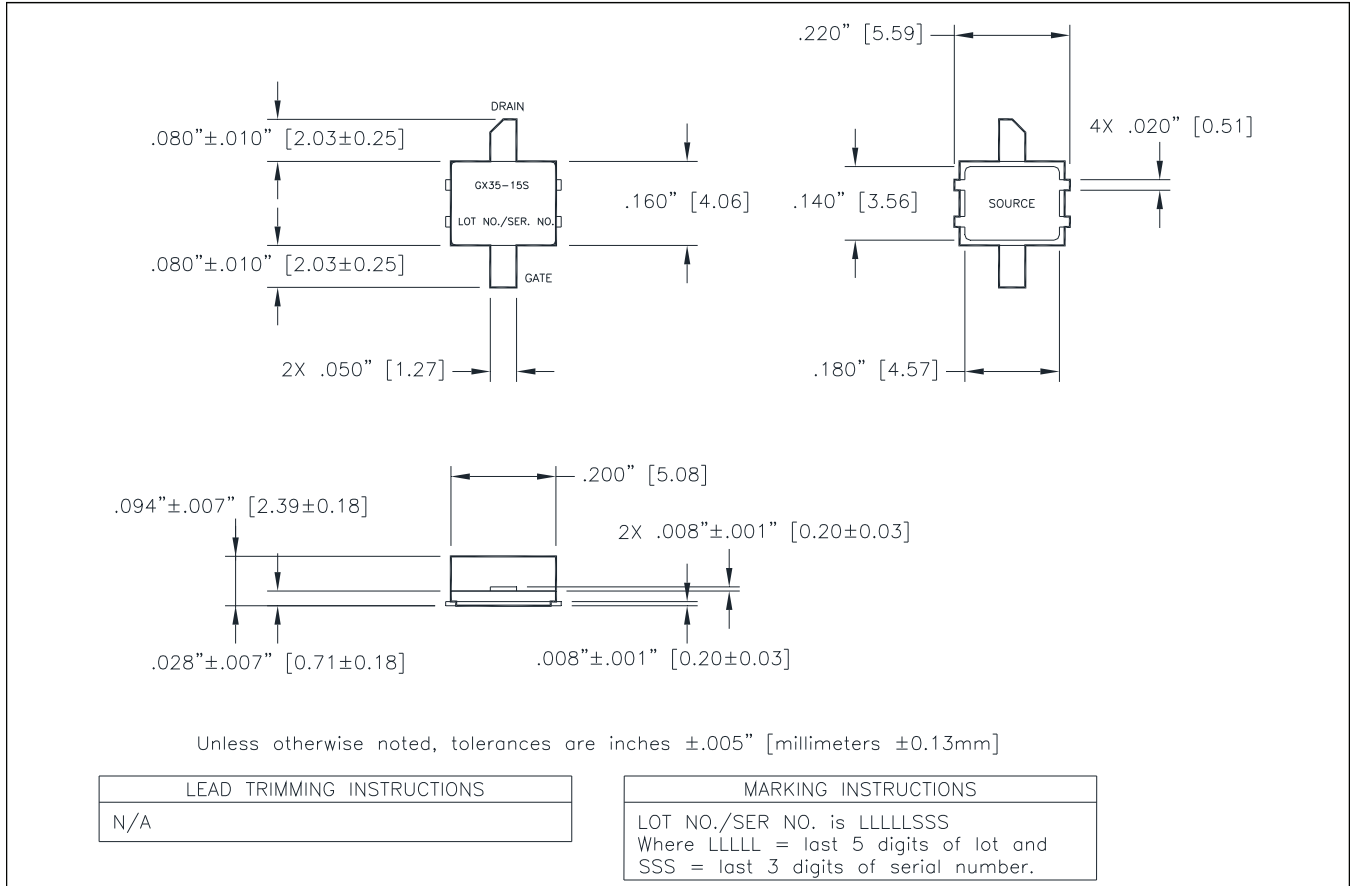

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)