

# SUMICON 1600 SERIES RECTANGULAR CONNECTORS

The SUMICON 1600 series are multi-contact connectors designed by Hirose. 8, 12, 16, 20, 24, 28, 34, 45 and 60-contact models available (same as the 1300 series). The connector units are available in three types: soldering, wrapping, and crimping. Accessories

are C case, CA case, CBA case, ST stopper, STA stopper, and STB stopper. By combining the many options noted above, the SUMICON 1600 series connectors meet a wide variety applications.

## Standard Type

### General

In the SUMICON 1600 series, the connector unit is completely separated from the accessories such as the cases and stoppers to diversify the specifications and

facilitate wiring connection. The SUMICON 1600 series are specified in the NTT specifications No.1931.

### Electrical Characteristics

Item	Standard
Contact Resistance	7mΩ max. at DC 1A
Insulation Resistance	1000MΩ min. at DC 500V
Withstand Voltage	AC 1000V for 1 minute
Current Rating	3A
Voltage Rating	300V AC


### Material and Finish

Part	Material	Finish
Insulator	Glass filled diallylphthalate resin	Blue
Male Terminal	Brass	Type A: Silver-plated Type G: Gold-plated
Female Terminal	Phosphor bronze	
Plug Case	ABS resin (black)	NTT spec: ABS resin, 2.5PB 6.0/2.0 (color)
Stopper Bracket	Steel	Nickel plating

### Wire Wrapping Specifications

Applicable wire	AWG	26	28	30
	Applicable wire (mm)	0.41	0.32	0.26
	Max. coating O.D. (mm)	0.95	0.75	0.6
Wrapping method		Ordinary wrapping	Coating one wrap	Coating one wrap
Effective number of wrappings		about 8	about 8	about 9
Number of wrappings per terminal		2 wrap		

### Ordering Information

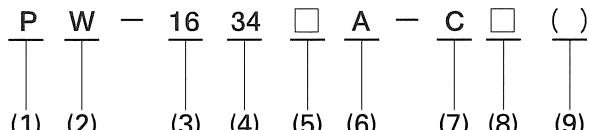


- (1) Shape of terminal opening  
P: Male terminal  
S: Female terminal
- (2) Terminal connection method  
No sign: Soldering  
W: Wrapping C: Crimp
- (3) Series No.  
16: 1600 series
- (4) Number of contacts 34: 34 contacts
- (5) Serial sign for connector units  
Provided with a sequence of upper-case alphabetic characters.  
No sign or sign other than W: Soldering  
Sequence: No sign, B, C, D, E ...
- (6) Plating  
A: Silver-plated  
G: Gold-plated
- (7) Signs for accessories
- C: Plug case  
ST: Stopper bracket with horizontal cable inlet opening  
J: Jack Case  
H: Handle  
DB: Deep bracket
- (8) Serial signs for accessories  
Each accessory (C, ST, J, H, DB) is provided with sequence of upper-case, alphabetic characters.  
Sequence: No sign, A, B, C...  
Accessories, C, ST, or J followed by **no sign**: Side lock types  
Accessories, C and ST followed By A: Top touch lock type  
Note: The space for no sign is filled sequentially.
- (9) Special specification, ( ) is filled with a serial number, except for the case and bracket, for which the following apply.  
(51): Bracket only  
(50): Case only

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
 All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Cross Reference to NTT No.

Type	NTT No.	Short Form	HRS No.	Part No.	Type	NTT No.	Short Form	HRS No.	Part No.
Plug	CN-3320GLWPMsa	20GLWPMsa	CL216-0247-5-51	P-1620BA-CA (51)	Receptacle	CN-5445GJMSA	45GJMSA	CL216-0257-9-51	P-1645BA-STA (51)
	CN-4028GLWPMsa	28GLWPMsa	CL216-0249-0-51	P-1628BA-CA (51)		CN-6760GJMSA	60GJMSA	CL216-0258-1-51	P-1660BA-STA (51)
	CN-4534GLWPMsa	34GLWPMsa	CL216-0250-0-51	P-1634BA-CA (51)		CN-3320G2JMSA	20G2JMSA	CL216-0292-0-51	PW-1620BA-STA (51)
	CN-5445GLWPMsa	45GLWPMsa	CL216-0251-2-51	P-1645BA-CA (51)		CN-3724G2JMSA	24G2JMSA	CL216-0293-2-51	PW-1624BA-STA (51)
	CN-6760GLWPMsa	60GLWPMsa	CL216-0252-5-51	P-1660BA-CA (51)		CN-4028G2JMSA	28G2JMSA	CL216-0294-5-51	PW-1628BA-STA (51)
	CN-3320GLWPFsa	20GLWPFsa	CL216-0153-3-51	P-1620A-CA (51)		CN-4534G2JMSA	34G2JMSA	CL216-0296-0-51	PW-1634BA-STA (51)
	CN-3724GLWPFsa	24GLWPFsa	CL216-0154-6-51	P-1624A-CA (51)		CN-6760G2JMSA	60G2JMSA	CL216-0298-6-51	PW-1660BA-STA (51)
	CN-4028GLWPFsa	28GLWPFsa	CL216-0155-9-51	P-1628A-CA (51)		CN-3320GJFsa	20GJFsa	CL216-0151-8-51	S-1620A-STA (51)
	CN-4534GLWPFsa	34GLWPFsa	CL216-0126-0-51	P-1634A-CA (51)		CN-3724GJFsa	24GJFsa	CL216-0148-3-51	S-1624A-STA (51)
	CN-5445GLWPFsa	45GLWPFsa	CL216-0127-3-51	P-1645A-CA (51)		CN-4028GJFsa	28GJFsa	CL216-0152-0-51	S-1628A-STA (51)
	CN-6760GLWPFsa	60GLWPFsa	CL216-0128-6-51	P-1660A-CA (51)		CN-4028G2JFsa	28G2JFsa	CL216-0313-8-51	SW-1628A-STA (51)
Receptacle	CN-3724GJMSA	24GJMSA	CL216-0254-0-51	P-1624BA-STA (51)		CN-4534G2JFsa	34G2JFsa	CL216-0299-9-51	SW-1634A-STA (51)
	CN-4028GJMSA	28GJMSA	CL216-0255-3-51	P-1628BA-STA (51)		CN-5445G2JFsa	45G2JFsa	CL216-0300-6-51	SW-1645A-STA (51)
	CN-4534GJMSA	34GJMSA	CL216-0256-6-51	P-1634BA-STA (51)		CN-6760G2JFsa	60G2JFsa	CL216-0301-9-51	SW-1660A-STA (51)


Note: NTT Types are all assembled with connector inserts and plug shells or stopper brackets.

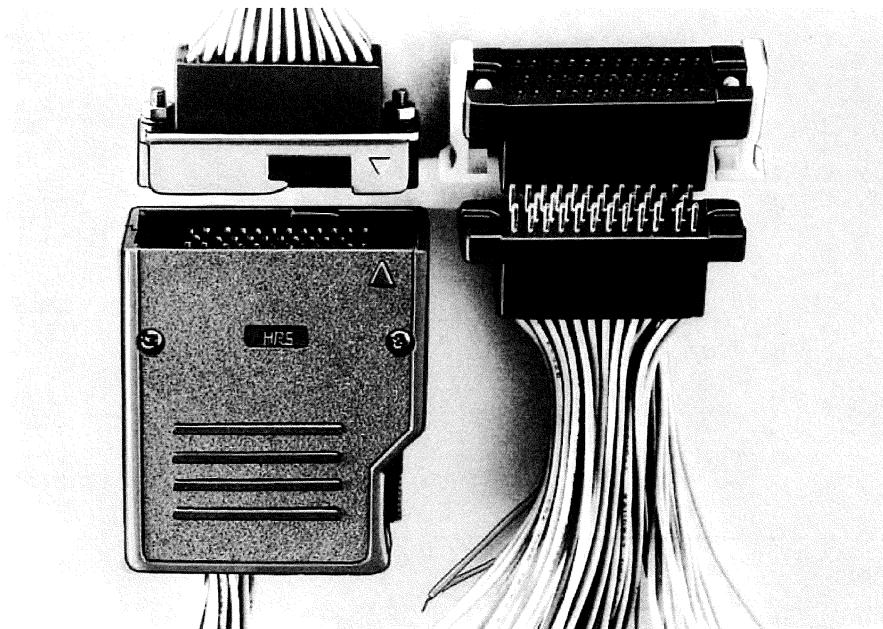


The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Soldering Eyelet Pin Connector

### Male Connector

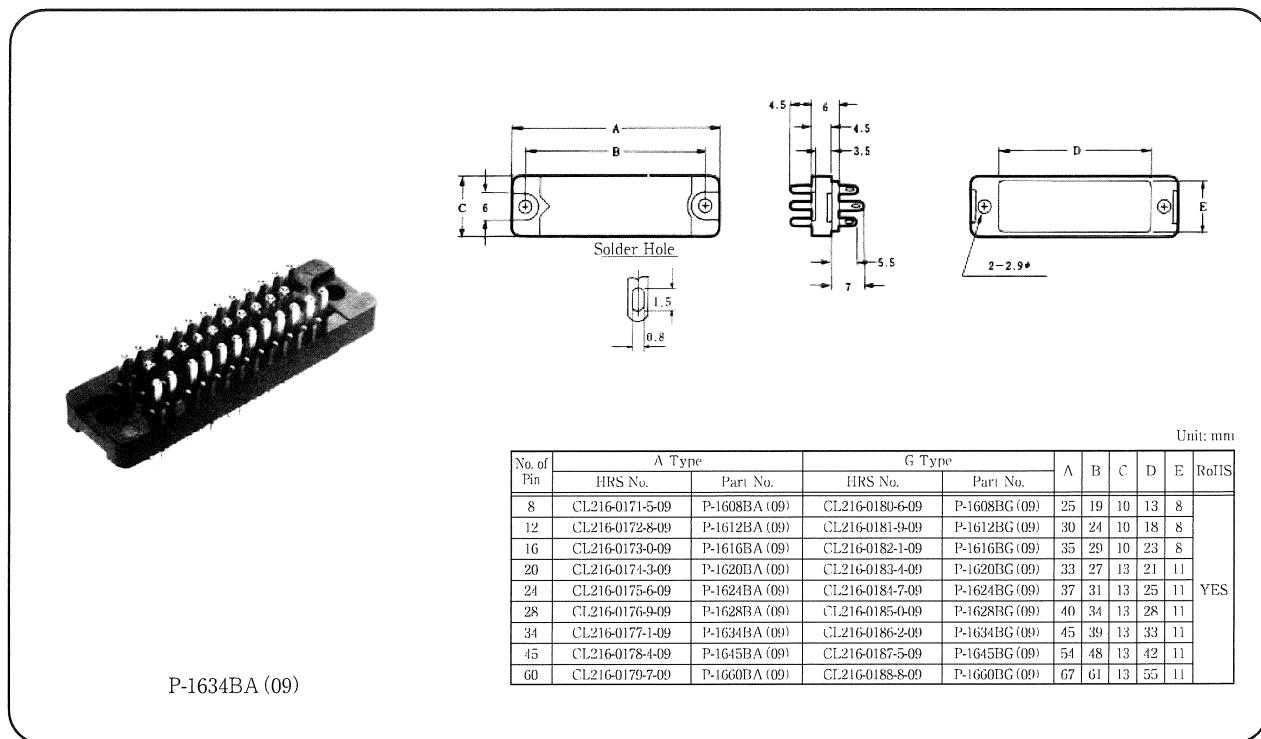



### Female Connector

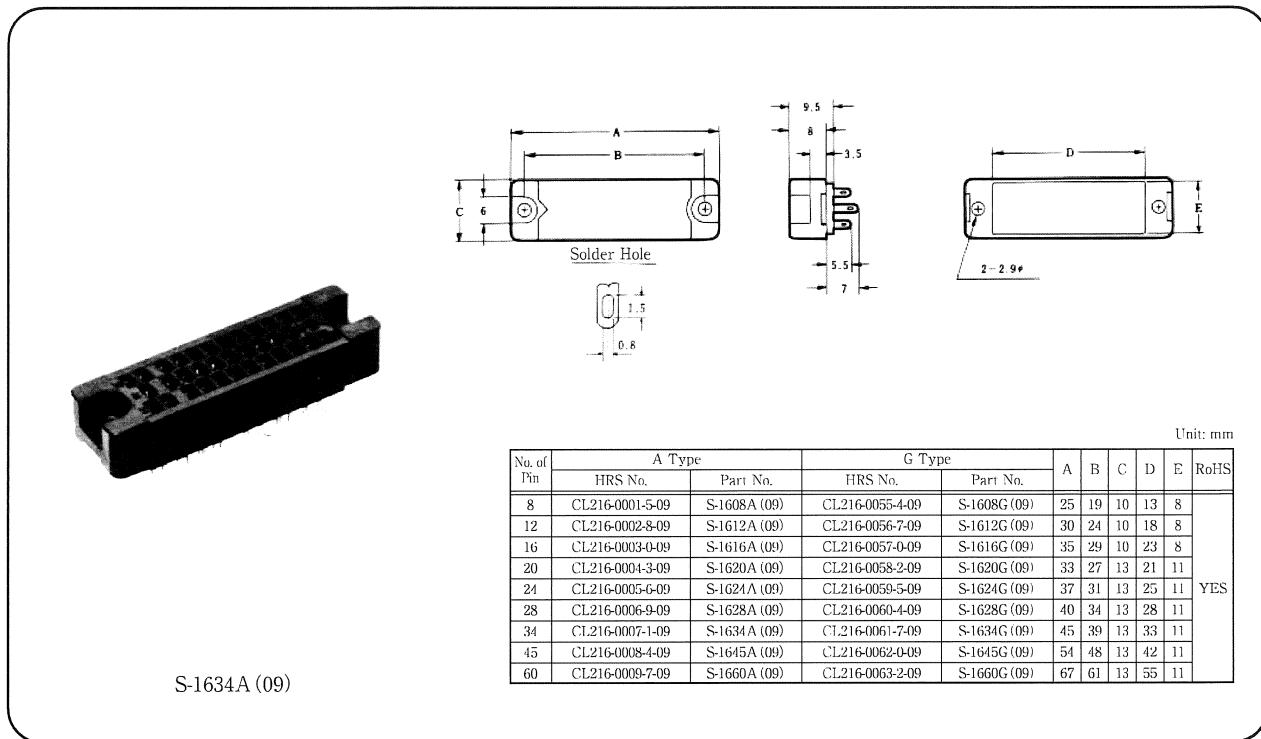

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Wire Wrapping Pin Connector



### Male Connector

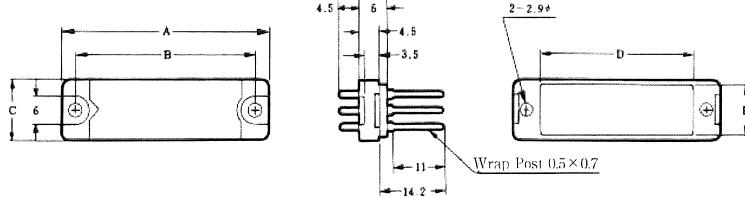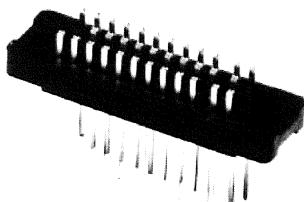

PW-1634BA (09)

No. of Pin	A Type		G Type		A	B	C	D	E	RoHS	YES
	HRS No.	Part No.	HRS No.	Part No.							
8	CL216-0198-1-09	PW-1608BA (09)	CL216-0216-1-09	PW-1608BG (09)	25	19	10	13	8		
12	CL216-0199-4-09	PW-1612BA (09)	CL216-0217-4-09	PW-1612BG (09)	30	24	10	18	8		
16	CL216-0200-1-09	PW-1616BA (09)	CL216-0218-7-09	PW-1616BG (09)	35	29	10	23	8		
20	CL216-0201-4-09	PW-1620BA (09)	CL216-0219-0-09	PW-1620BG (09)	33	27	13	21	11		
24	CL216-0202-7-09	PW-1624BA (09)	CL216-0226-9-09	PW-1624BG (09)	37	31	13	25	11		
28	CL216-0203-0-09	PW-1628BA (09)	CL216-0221-1-09	PW-1628BG (09)	40	34	13	28	11		
34	CL216-0204-2-09	PW-1634BA (09)	CL216-0222-4-09	PW-1634BG (09)	45	39	13	33	11		
45	CL216-0205-5-09	PW-1645BA (09)	CL216-0223-7-09	PW-1645BG (09)	54	48	13	42	11		
60	CL216-0206-8-09	PW-1660BA (09)	CL216-0224-0-09	PW-1660BG (09)	67	61	13	55	11		

### Female Connector

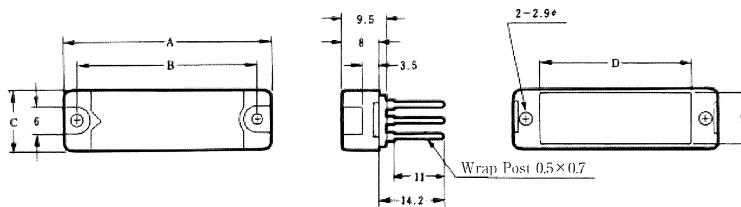
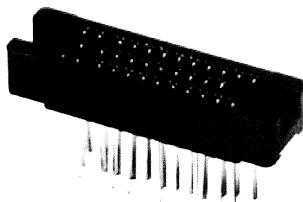


SW-1634A (09)

No. of Pin	A Type		G Type		A	B	C	D	E	RoHS	YES
	HRS No.	Part No.	HRS No.	Part No.							
8	CL216-0189-0-09	SW-1608A (09)	CL216-0207-0-09	SW-1608G (09)	25	19	10	13	8		
12	CL216-0190-0-09	SW-1612A (09)	CL216-0208-3-09	SW-1612G (09)	30	24	10	18	8		
16	CL216-0191-2-09	SW-1616A (09)	CL216-0209-6-09	SW-1616G (09)	35	29	10	23	8		
20	CL216-0192-5-09	SW-1620A (09)	CL216-0210-5-09	SW-1620G (09)	33	27	13	21	11		
24	CL216-0193-8-09	SW-1624A (09)	CL216-0211-8-09	SW-1624G (09)	37	31	13	25	11		
28	CL216-0194-0-09	SW-1628A (09)	CL216-0212-0-09	SW-1628G (09)	40	34	13	28	11		
34	CL216-0195-3-09	SW-1634A (09)	CL216-0213-3-09	SW-1634G (09)	45	39	13	33	11		
45	CL216-0196-6-09	SW-1645A (09)	CL216-0214-6-09	SW-1645G (09)	54	48	13	42	11		
60	CL216-0197-9-09	SW-1660A (09)	CL216-0215-9-09	SW-1660G (09)	67	61	13	55	11		

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Side Touch Lock Type Plug Shell

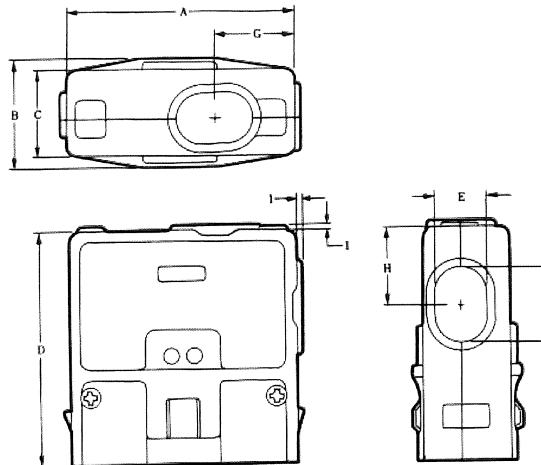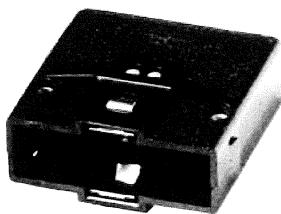



Unit: mm

No. of Part	HRS No.	Part No.	A	B	C	D	E	F	G	H	RoHS
8	CL216-0028-1-50	P-1608A-C(50)	29	20	14.5	42	7.5	7.5	12.5	12.5	
12	CL216-0029-4-50	P-1612A-C(50)	34	20	14.5	43.5	7.5	9	13.5	13.5	
16	CL216-0030-3-50	P-1616A-C(50)	39	20	14.5	46	7.5	11.5	14.5	14.5	
20	CL216-0031-6-50	P-1620A-C(50)	37	23	17.5	45.5	11	11	14.5	14.5	
24	CL216-0032-9-50	P-1624A-C(50)	41	23	17.5	46.5	11	12	15	15	YES
28	CL216-0033-1-50	P-1628A-C(50)	44	23	17.5	47.5	11	13	15.5	15.5	
34	CL216-0034-4-50	P-1634A-C(50)	49	23	17.5	50.5	11	16	17	17	
45	CL216-0035-7-50	P-1645A-C(50)	58	23	17.5	54.5	11	19	18.5	19.5	
60	CL216-0036-0-50	P-1660A-C(50)	71	23	17.5	59.5	11	24	21	22	

P-1634A-C (50)

Note: All these products are plug cases only. Order connector units separately.  
The cases can be used for both male and female connector units. The cases marked with an asterisk are of standard specifications.

## Side Touch Lock Type Receptacle Bracket

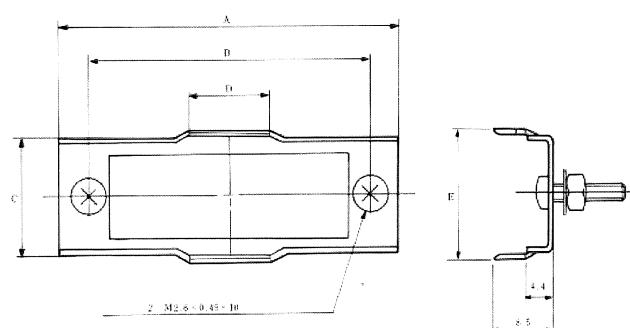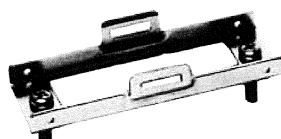

Unit: mm


No. of Part	HRS No.	Part No.	A	B	C	D	E	RoHS
8	CL216-0046-3-51	P-1608A-ST(51)	27	19	13.6	9.2	15.5	
12	CL216-0047-6-51	P-1612A-ST(51)	32	24	13.6	9.2	15.5	
16	CL216-0048-9-51	P-1616A-ST(51)	37	29	13.6	11	15.5	
20	CL216-0049-1-51	P-1620A-ST(51)	35	27	16.6	11	18.5	
24	CL216-0050-0-51	P-1624A-ST(51)	39	31	16.6	11	18.5	YES
28	CL216-0051-3-51	P-1628A-ST(51)	42	34	16.6	11	18.5	
34	CL216-0052-6-51	P-1634A-ST(51)	47	39	16.6	11	18.5	
45	CL216-0053-9-51	P-1645A-ST(51)	56	48	16.6	15	18.5	
60	CL216-0054-1-51	P-1660A-ST(51)	69	61	16.6	15	18.5	

P-1634A-ST (51)

Note: All these products are stopper brackets only. Order connector units separately. The cases can be used for both male and female connector units. The brackets marked with an asterisk are of standard specifications.

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information. All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.


## Top Touch Lock Type Plug Shell

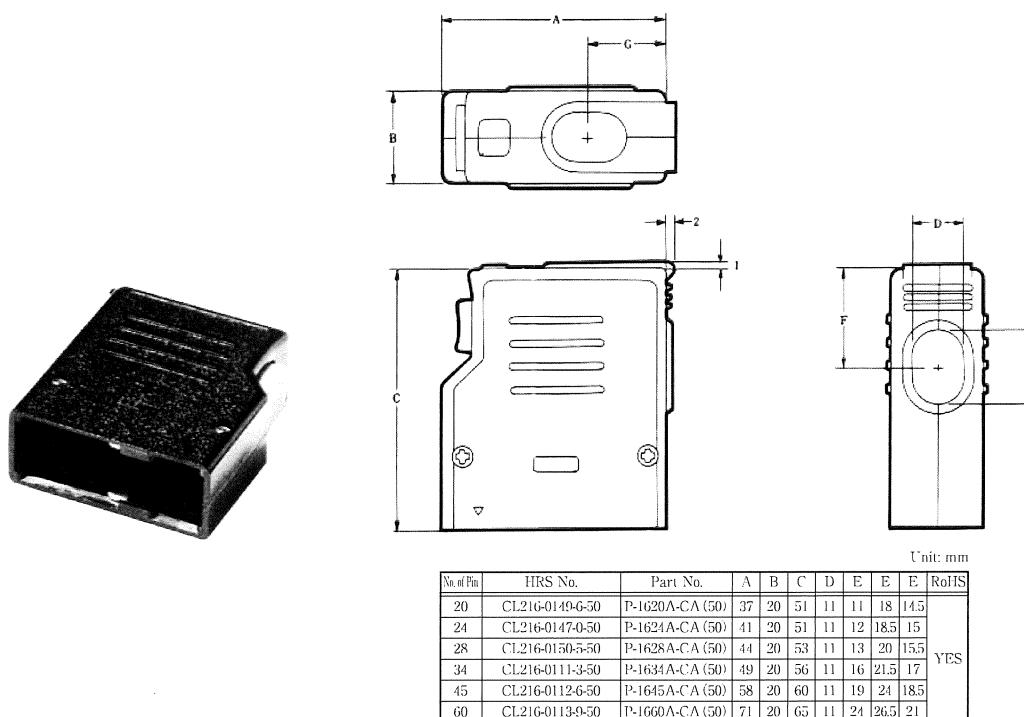

P-1634A-CA (50)

Note: All these products are plug cases only. Order connector units separately. The cases can be used for both male and female connector units. The cases marked with an asterisk are of standard specifications.

## Side Touch Lock Type Receptacle Bracket


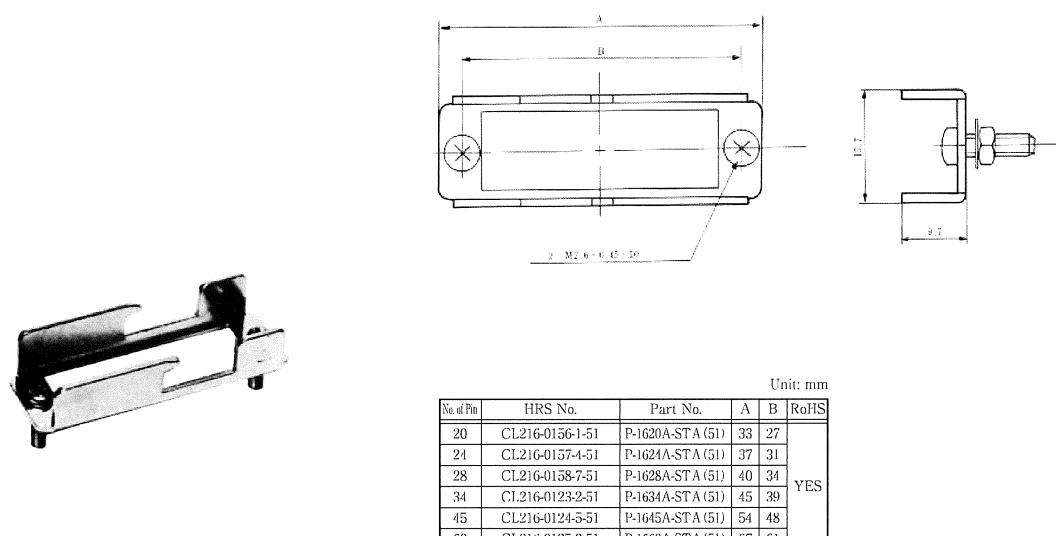


P-1634A-STA (51)

Note: All these products are stopper brackets only. Order connector units separately. The cases can be used for both male and female connector units. The brackets marked with an asterisk are of standard specifications.

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Side Touch Lock Type Jack Shell (For Extension Cable)

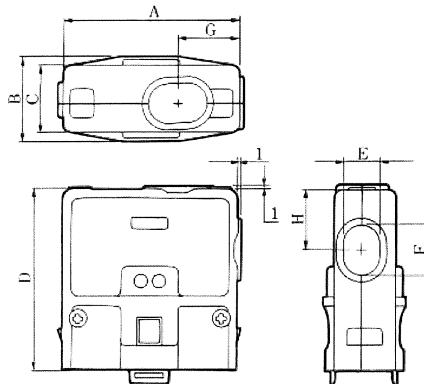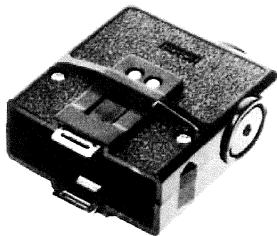



S-1634A-J(50)

No. of Pin	HRS No.	Part No.	Unit: mm							
			A	B	C	D	E	F	G	H
20	CL216-0139-2-50	S-1620A-J(50)	37	23	17.5	45.5	11	11	14.5	14.5
24	CL216-0140-1-50	S-1624A-J(50)	41	23	17.5	46.5	11	12	15	15
28	CL216-0141-4-50	S-1628A-J(50)	44	23	17.5	47.5	11	13	15.5	15.5
34	CL216-0142-7-50	S-1634A-J(50)	49	23	17.5	50.5	11	16	17	17
45	CL216-0225-2-50	S-1645A-J(50)	55	23	18.5	54.5	11	19	18.5	19.5
60	CL216-0226-5-50	S-1660A-J(50)	71	23	18.5	59.5	11	24	21	22

YES

Note: All these products are jack cases only. Order connector units separately.  
The cases can be used for female connector units only.

## Top Touch Lock Type Stopper Bracket

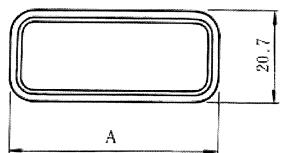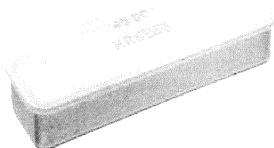

1645STA-DC

No. of Pin	HRS No.	Part No.	Unit: mm	
			A	RoHS
20	CL216-0321-6	1620STA-DC	38.3	
24	CL216-0322-9	1624STA-DC	42.3	
28	CL216-0323-1	1628STA-DC	45.3	
34	CL216-0324-4	1634STA-DC	50.3	
45	CL216-0325-7	1645STA-DC	59.3	
60	CL216-0326-0	1660STA-DC	72.3	

YES

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information. All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

# SHOULDER-TOUCH LOCK TYPE



## General

The shoulder-touch lock type plug cases are highly reliable, lightweight, sturdy, and operable. 8, 12, and 16-contact models are available. Hirose high-density packaging plug cases, including the top-touch lock type, are available in 8 to 60-contact models.

## Material and Finish

Description	Material	Finish
Plug case	Polypropylene resin	Black
Stopper	Steel	Nickel plating



## Plug Case

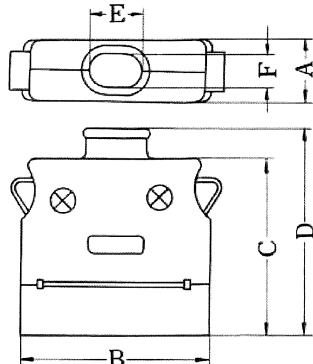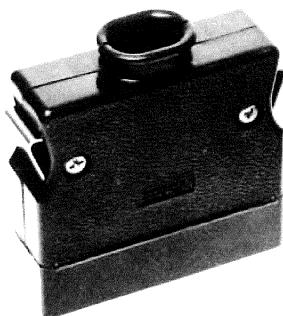


No. of Pin	HRS No.	Part No.	Unit: mm						RoHS
			A	B	C	D	E	F	
8	CL216-0416-0-50	1608-CBA (50)	14	35	40	45	7.5φ		
12	CL216-0417-3-51	1612-CBA (50)	14	40	41	46	9	7.5	YES
16	CL216-0418-6-50	1616-CBA (50)	14	45	42	47	11.5	7.5	

Note: Order connector units separately. The cases can be used for both male and female connector units. The cases marked with an asterisk are of standard specifications.

## Stopper

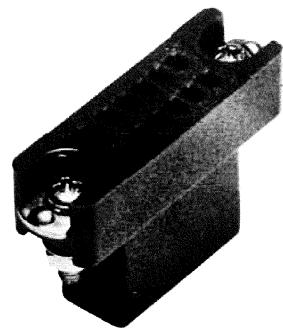

### How to Mount

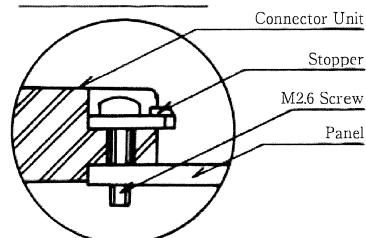

1600-STB (05)

Note: Mounted on a connector unit  
(Each package contains two stoppers)


HRS No.	Part No.	Remark	RoHS
CL216-0302-1-05	1600-STB (05)	Common for any size	YES

Note: Order connector units separately. The cases marked with an asterisk are of standard specifications.

# 1600 SUMICON CRIMP TYPE CONNECTORS

## General

The SUMICON 1600 series are high-performance compact crimp type connectors developed for labor saving in connection work. 8, 12, 16, 20, 24, 34, 45 and 60-contact models are available. All models are compatible with our previous top-lock type plug cases. For using the connectors separately, easy-to-mount plastic locks are available to expand their functions.

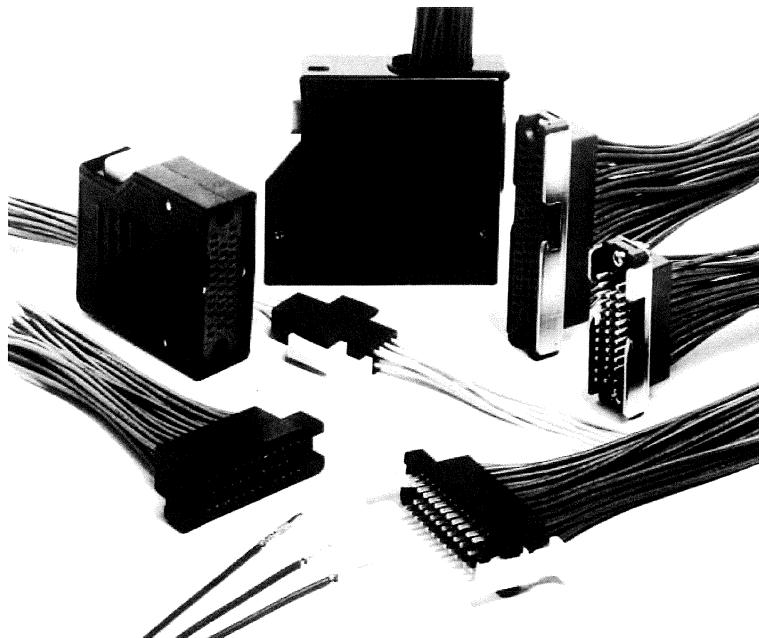

## Orderig Information



Item	Standard			
Contact Resistance	7mΩ or less at DC 1A (contact only)			
Insulation Resistance	5.000MΩ or more at DC 500V			
Withstand Voltage	AC 1.000V for 1minute			
Rating Current	3A			
Applicable Cable	AWG#24-28 (Coating O.D. 1.6φ-0.9φ)			
Crimping strength (Unit: kg or more)	Cable	AWG#24	AWG#26	AWG#28
	Crimping force	3.6	2.4	1.6

Part	Material	Finish
Insulator	Glass-containing polycarbonate resin UL94V-0	Blue
Male Terminal	Brass	Gold-plated Silver-Plated
Female Terminal	Phosphor bronze	Gold-plated Silver-Plated


## Features

1. Since this is a press-fit type connector, anyone can performe wiring securely with high reliability.
2. For contact, a two-point contact system is employed for outstanding reliability. It asiso offers superior mechanical strength.
3. The Sumicon 1600 Series Press-Fit Type Connectors are interchangeable with the conventional solder, DIP and lapping type connectors. They are applicable, therfore, to a wider range of applications.
- 4 To use connector unit separately, jointly employing an easily installable plastic lock will prevent vibrations and/or cable dead weight from unplugging the connector. The plastic lock, moreover, can be used with either center-suspension or panel-mount system.
- 5 All wiring spliced with the connector is hidden completely inside the housing, allowing for perfect insulation.

## Housing

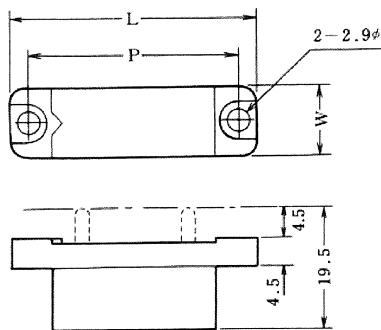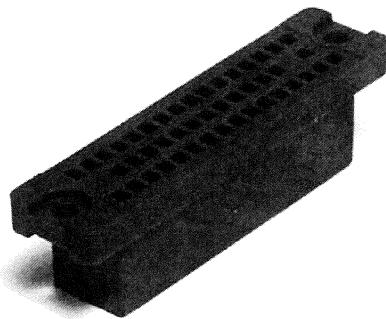


Unit: mm						
HRS No.	No. of Pin	Part No.	L	P	W	RoHS
CL216-0335-0	8	PC-1608	25	19	10	YES
CL216-0336-3	12	PC-1612	30	24	10	
CL216-0337-6	16	PC-1616	35	29	10	
CL216-0338-9	20	PC-1620	33	27	13	
CL216-0339-1	24	PC-1624	37	31	13	
CL216-0340-0	28	PC-1628	40	34	13	
CL216-0341-3	34	PC-1634	45	39	13	
CL216-0342-6	45	PC-1645	54	48	13	
CL216-0343-9	60	PC-1660	67	61	13	

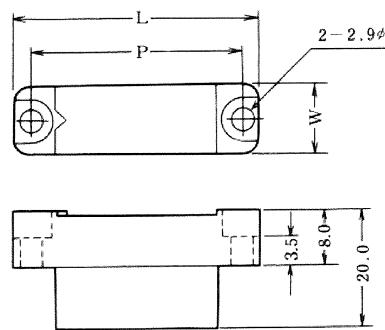

Unit: mm						
HRS No.	No. of Pin	Part No.	L	P	W	RoHS
CL216-0344-1	8	SC-1608	25	19	10	YES
CL216-0345-4	12	SC-1612	30	24	10	
CL216-0346-7	16	SC-1616	35	29	10	
CL216-0347-0	20	SC-1620	33	27	13	
CL216-0348-2	24	SC-1624	37	31	13	
CL216-0349-5	28	SC-1628	40	34	13	
CL216-0350-4	34	SC-1634	45	39	13	
CL216-0351-7	45	SC-1645	54	48	13	
CL216-0352-0	60	SC-1660	67	61	13	


## Contact

### Male Contact



Type	HRS No.	Part No.	Plating	RoHS
Loose	CL216-0331-0	PC-1600-111	Gold	YES
	CL216-0332-2	PC-1600-112	Silver	
Chain	CL216-0363-6	PC-1600-211	Gold	YES
	CL216-0364-9	PC-1600-212	Silver	

### Female Contact




Type	HRS No.	Part No.	Plating	RoHS
Loose	CL216-0333-5	SC-1600-111	Gold	YES
	CL216-0334-8	SC-1600-112	Silver	
Chain	CL216-0365-1	SC-1600-211	Gold	YES
	CL216-0366-4	SC-1600-212	Silver	

Note: Loose-piece terminals are available in packs. Each pack contains 100 terminals. Strip terminals are available in reels. Each reel contains 10,000 terminals.

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information. All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Tools

Type	HRS No.	Part No.
Manual crimping tool	CL250-0003-1	TC-1600-111
Contact extractor	CL250-0004-4	TC-1600-21

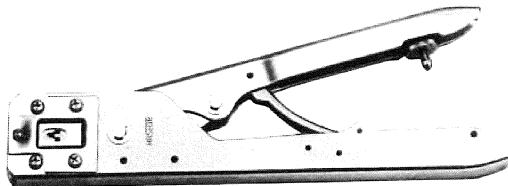


Hand Crimp Tool TC-1600-111




Contact Extractor TC-1600-21

## Ordering Informations

### ● Housing

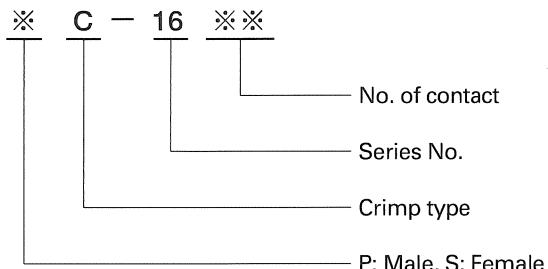


### ● Contact

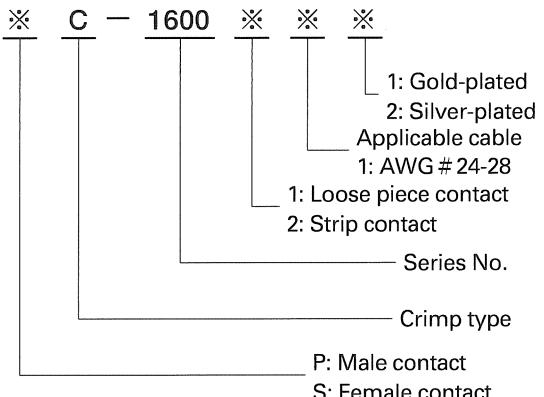

## Using the Connectors


- (1) Take care when removing the connectors to pull out by the housing and not tug on the wires.
- (2) The male terminals of the connectors will be bent if the connectors are twisted when being removed. Take care to pull the characters out straight.
- (3) The plastic locks are sufficiently strong to ensure that the connector engagement will not be loosened by vibration or the weight of the wires. Their strength is not sufficient for other loads. When strength for some other load is required, use the top-touch lock type plug case (common for both solder and wrapping types).
- (4) Both gold-plated and silver-plated terminals are available. Use the gold-plated type in adverse environments. In other environments, we recommend the economical silver-plated type.
- (5) For crimping, use a manual crimping device for low-volume crimping and maintenance. For high-volume crimping, we recommend the automatic crimping machine shown on page 124.
- (6) For plug-in uses, we recommend Sumicon 1600 series solder or wrapping types for improved functionality.

## Assembly Procedure

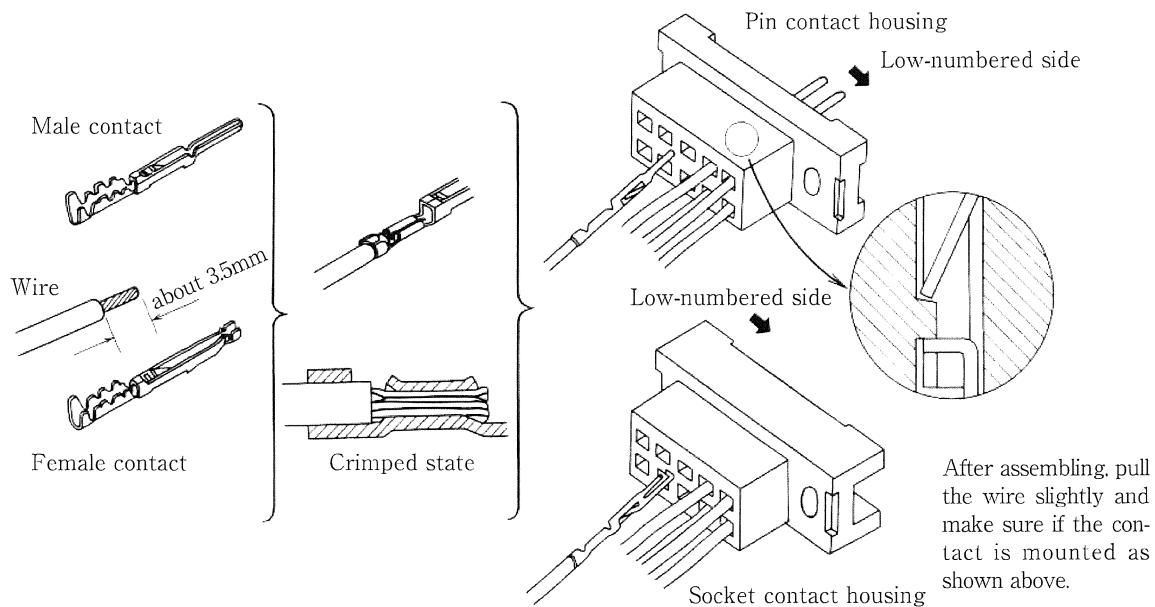

## Procedure for Contact Extraction

In case of extracting a contact from the housing due to insertion error or circuit change, follow the steps as shown below.

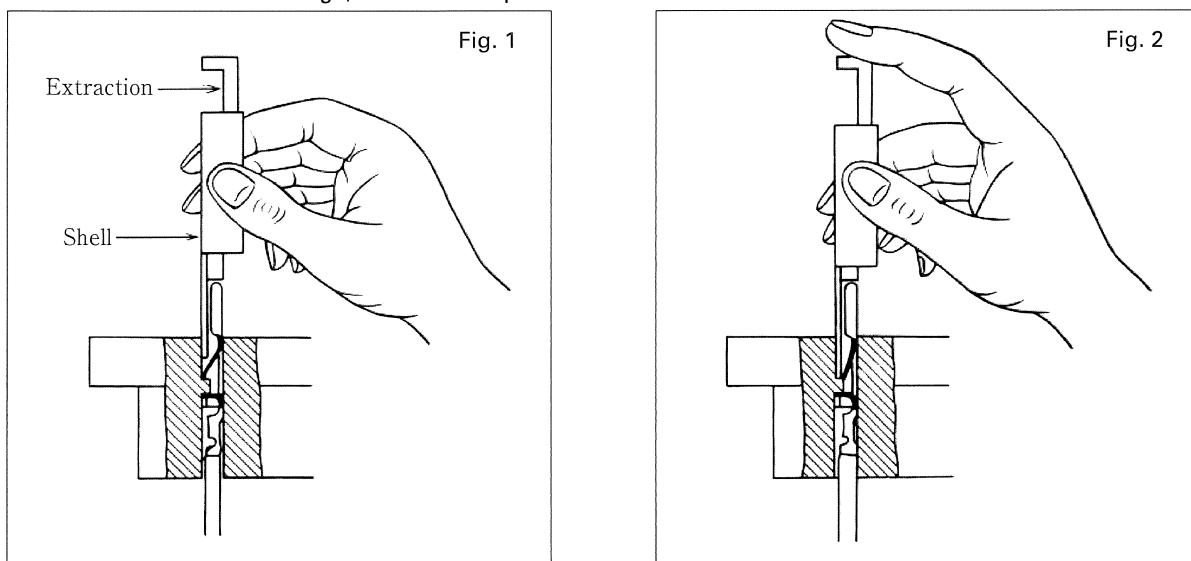

- 1 Hold the Contact Extractor as shown in Fig. 1, placing the tip of the Extractor on the tip of a contact, then insert it between the contact and the housing.
2. When the tip of the Extractor comes into contact with a stepped part in the housing, the spring will come off from the stepped part with a snap which can be felt. Then, extract the contact by pulling the wire.

(Caution: Pushing the tip of the extractor forcibly before the spring has come off from the stepped part may damage the contact).

3. Above Fig. 1 and Fig. 2 show how to extract a contact from socket housing. The same procedure can be employed to extract a contact from pin housing.

## Use of Connectors with Respect to Polarity (to prevent mis-insertion of connectors)

Polarization of SUMICON 1600 series can be achieved by contact arrangement. The crimp type contacts are designed to float a little, so that the use of a Polarizing

Key is recommended in order to ensure positive polarization.

### In Case of 8, 12 and 16 contact



1. When crimp types are used in both the male and female, do not fill all cavities with contacts. Use Polarizing Key at minimum 2 cavities of Socket housing as shown below and do not fill pin contacts at the corresponding cavities of male housing.
2. When male crimp type is used in combination with solder or wire wrap female type, the connector coupling shall be done carefully not to couple in reverse position. Coupling shall be made by matching of triangle marks on connector inserts.

### In case of Multi Pin Type more than 20 contact

1. SUMICON 1600 series are naturally polarized in all cavities filled with contacts. When all cavities are not filled, Polarizing Keys shall be inserted in vacant cavities to the minimum for preventing reverse coupling. But when Top Touch Lock Plug Shell is used, Polarizing Keys are not necessary because Plug Shell has polarized mechanism.
2. When male crimp type is used with some vacant cavities in combination with solder or wire wrap female type, Top Touch Lock Plug Shell is recommended.



The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information. All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Handle

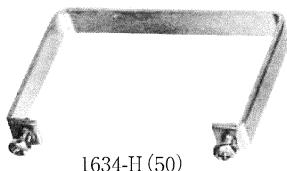

Unit: mm							
No. of Pin	HRS No.	Part No.	A	B	C	D	RoHS
16	CL216-0135-1-50	1616-H (50)	36	25	6	29	
34	CL216-0136-4-50	1634-H (50)	46	30	6	39	YES
60	CL216-0137-7-50	1660-H (50)	68	30	8	61	

## Deep Bracket

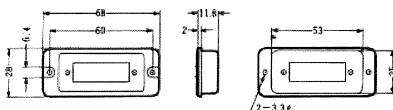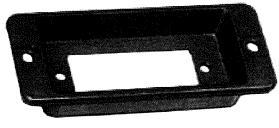


Unit: mm			
No. of Pin	HRS No.	Part No.	RoHS
34	CL216-0138-0	1634-DB	YES

## Crimp or any Connector Unit

HRS No.	Part No.	RoHS
CL216-0354-5	1600-LC	YES



### How to Mount

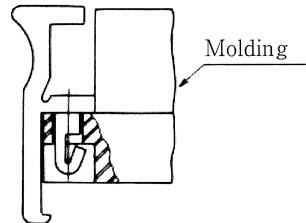

1600-LC

Common for solder, wire wrap, crimp or any connector unit


## Polarizing Key

HRS No.	Part No.	RoHS
CL216-0487-9	Polarizing Key	YES



Polarizing Key

### How to Mount

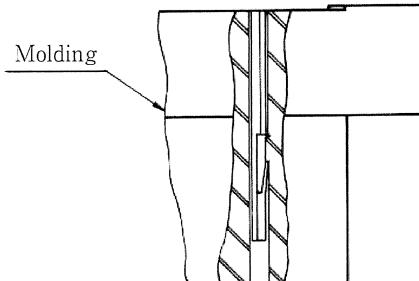

The polarizing key (material: SC-16 " ") can be used for any type of female housing. For handling, see "Notes on connector polarity (prevention of misinsertion" on 124page of this manual.

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Terminal Arrangement and Numbers

The figure shows a male connector as viewed from the termination side

8 pin

1O	O5
2O	O6
3O	O7
4O	O8

12 pin

1O	O3
2O	O7
3O	O8
4O	O9
5O	O10
6O	O11
7O	O12
8O	O13
9O	O14
10O	O15
11O	O16
12O	O17

16 pin

1O	O14
2O	O8
3O	O9
4O	O10
5O	O11
6O	O12
7O	O13
8O	O14
9O	O15
10O	O16
11O	O17
12O	O18
13O	O19
14O	O20

20 pin

1O	O16
2O	O17
3O	O18
4O	O19
5O	O20
6O	O11
7O	O12
8O	O13
9O	O14
10O	O15
11O	O21
12O	O22
13O	O23
14O	O24
15O	O25
16O	O26
17O	O27
18O	O28
19O	O29
20O	O30

24 pin

1O	O19
2O	O11
3O	O12
4O	O13
5O	O14
6O	O15
7O	O16
8O	O17
9O	O18
10O	O21
11O	O22
12O	O23
13O	O24
14O	O25
15O	O26
16O	O27
17O	O28
18O	O29
19O	O30
20O	O31
21O	O32
22O	O33
23O	O34
24O	O35

28 pin

1O	O23
2O	O13
3O	O14
4O	O15
5O	O16
6O	O17
7O	O18
8O	O19
9O	O20
10O	O21
11O	O22
12O	O23
13O	O24
14O	O25
15O	O26
16O	O27
17O	O28
18O	O29
19O	O30
20O	O31
21O	O32
22O	O33
23O	O34
24O	O35
25O	O36
26O	O37
27O	O38
28O	O39
29O	O40
30O	O41
31O	O42
32O	O43
33O	O44
34O	O45
35O	O46
36O	O47
37O	O48
38O	O49
39O	O50
40O	O51
41O	O52
42O	O53
43O	O54
44O	O55
45O	O56
46O	O57
47O	O58
48O	O59
49O	O60

34 pin

1O	O31
2O	O17
3O	O18
4O	O19
5O	O20
6O	O21
7O	O22
8O	O23
9O	O24
10O	O25
11O	O26
12O	O27
13O	O28
14O	O29
15O	O30
16O	O31
17O	O32
18O	O33
19O	O34
20O	O35
21O	O36
22O	O37
23O	O38
24O	O39
25O	O40
26O	O41
27O	O42
28O	O43
29O	O44
30O	O45
31O	O46
32O	O47
33O	O48
34O	O49
35O	O50
36O	O51
37O	O52
38O	O53
39O	O54
40O	O55
41O	O56
42O	O57
43O	O58
44O	O59
45O	O60


45 pin

1O	O31
2O	O17
3O	O18
4O	O19
5O	O20
6O	O21
7O	O22
8O	O23
9O	O24
10O	O25
11O	O26
12O	O27
13O	O28
14O	O29
15O	O30
16O	O31
17O	O32
18O	O33
19O	O34
20O	O35
21O	O36
22O	O37
23O	O38
24O	O39
25O	O40
26O	O41
27O	O42
28O	O43
29O	O44
30O	O45
31O	O46
32O	O47
33O	O48
34O	O49
35O	O50
36O	O51
37O	O52
38O	O53
39O	O54
40O	O55
41O	O56
42O	O57
43O	O58
44O	O59
45O	O60

60 pin

1O	O41
2O	O22
3O	O42
4O	O23
5O	O43
6O	O24
7O	O44
8O	O25
9O	O45
10O	O26
11O	O46
12O	O27
13O	O47
14O	O28
15O	O48
16O	O29
17O	O49
18O	O30
19O	O50
20O	O31
21O	O51
22O	O32
23O	O52
24O	O33
25O	O53
26O	O34
27O	O54
28O	O35
29O	O55
30O	O36
31O	O56
32O	O37
33O	O57
34O	O38
35O	O58
36O	O39
37O	O59
38O	O40
39O	O60

## Connector Mounting Hole Dimensions

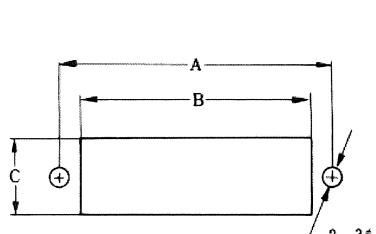


No. of Contact	A	B	C	screw
8	19	13.5	8.5	
12	24	18.5	8.5	
16	29	23.5	11.5	
20	27	21.5	11.5	
24	31	25.5	11.5	M2.6
28	34	28.5	11.5	
34	39	33.5	11.5	
45	48	42.5	11.5	
60	61	55.5	11.5	

# SUMICON 1600 SERIES DIP SOLDERING CONNECTORS

## General

The SUMICON 1600 series are original Hirose rectangular dip soldering connectors 8, 12, 16, 20, 24, 34, 45 and 60-contact models are available. All models are compatible with the previous 1600 series in mounting and accessories.

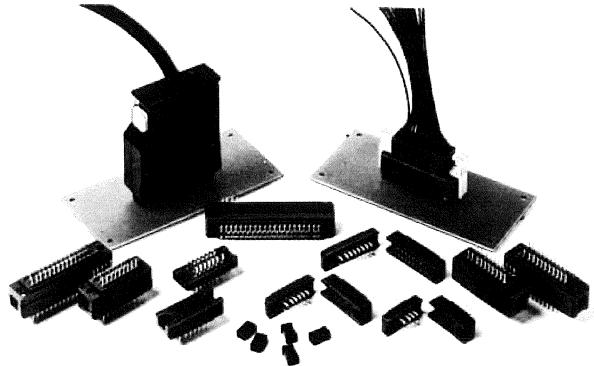

## Features

1. Allows straight dip soldering onto a PCB, and is effective in PCB-to-PCB and PCB-to-cable connection.
2. Suitable for use in interface, being compact and lightweight and meeting high-density packaging requirements.
3. Further cuts interconnection costs when simple locks are used.
4. A wide variety of combinations of connection methods available, e.g., dip soldering, wrapping, and crimping, to meet your requirements.

## Main Applications

Computers, peripherals and terminals, data communications equipment, measuring instruments,

signal equipment, mobile radio equipment, copier, and FAX machine.

## Electrical and Environmental

Performance	
Contact Resistance	7mΩ or less at DC 1A
Insulation Resistance	1,000MΩ or higher at DC 500V
Withstand Voltage	AC 1,000V for 1 minute
Current capacity	3A

Material and finish		
Insulator	Glass-Filled diallylphthalate resin	
Male Terminal	Bress	
Female Terminal	Phosphor bronze	Type A: Silver-plated Type B: Gold-plated

## Ordering Information

P D — 16 34 □ A — SP □ (09)

(1) (2) (3) (4) (5) (6) (7) (8) (9)

(1) Shape of terminal opening  
P: Male terminal  
S: Female terminal

(2) Terminal connection method  
D: Dip soldering

(3) Series No.  
16: 1600 series

(4) Number of contacts

(5) Serial sign for connector units  
Provided with a sequence of upper-case alphabetic characters.  
Sequence: No sign, B, C, D, E ...

(6) Plating  
A: Silver plated  
B: Gold plated

(7) Signs for accessories  
SP: Spacer for dip soldering



(8) Serial signs for accessories  
Each accessory is provided with a sequence A of upper-case alphabetic characters. Sequence: No sign, A, B ...

(9) Specification  
(09) : Standard

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Dip Soldering Type Connector



### Male Connector

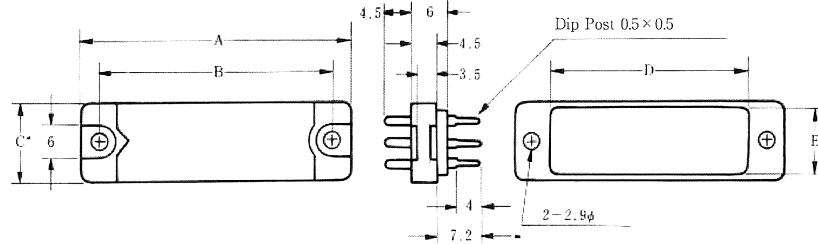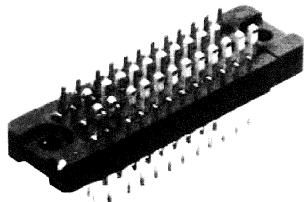

PD-1634BA (09)

No. of Pin	A Type		G Type		A	B	C	D	E	RoHS
	HRS No.	Part No.	HRS No.	Part No.						
8	CL216-0388-7-09	PD-1608BA (09)	CL216-0406-7-09	PD-1608BG (09)	25	19	10	13	8	YES
12	CL216-0389-0-09	PD-1612BA (09)	CL216-0407-0-09	PD-1612BG (09)	30	24	10	18	8	
16	CL216-0390-9-09	PD-1616BA (09)	CL216-0408-2-09	PD-1616BG (09)	35	29	10	23	8	
20	CL216-0391-1-09	PD-1620BA (09)	CL216-0409-5-09	PD-1620BG (09)	33	27	13	21	11	
24	CL216-0392-4-09	PD-1624BA (09)	CL216-0410-4-09	PD-1624BG (09)	37	31	13	25	11	
28	CL216-0393-7-09	PD-1628BA (09)	CL216-0411-7-09	PD-1628BG (09)	40	34	13	28	11	
34	CL216-0394-0-09	PD-1634BA (09)	CL216-0412-0-09	PD-1634BG (09)	45	39	13	33	11	
45	CL216-0395-2-09	PD-1645BA (09)	CL216-0413-2-09	PD-1645BG (09)	54	48	13	42	11	
60	CL216-0396-5-09	PD-1660BA (09)	CL216-0414-5-09	PD-1660BG (09)	67	61	13	55	11	

### Female Connector

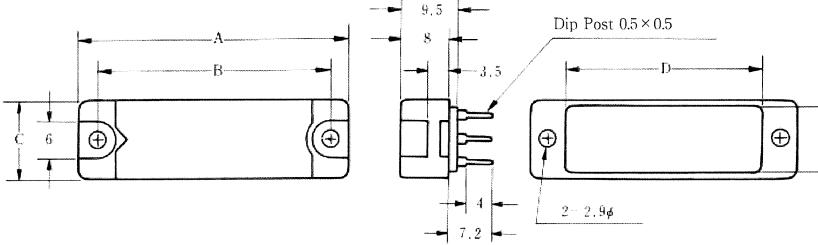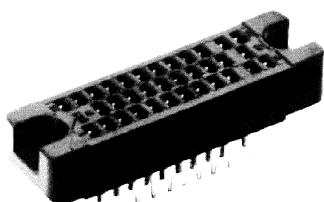

SD-1634A (09)



No. of Pin	A Type		G Type		A	B	C	D	E	RoHS
	HRS No.	Part No.	HRS No.	Part No.						
8	CL216-0379-6-09	SD-1608BA (09)	CL216-0397-8-09	SD-1608BG (09)	25	19	10	13	8	YES
12	CL216-0380-5-09	SD-1612BA (09)	CL216-0398-0-09	SD-1612BG (09)	30	24	10	18	8	
16	CL216-0381-8-09	SD-1616BA (09)	CL216-0399-3-09	SD-1616BG (09)	35	29	10	23	8	
20	CL216-0382-0-09	SD-1620BA (09)	CL216-0400-0-09	SD-1620BG (09)	33	27	13	21	11	
24	CL216-0383-3-09	SD-1624BA (09)	CL216-0401-3-09	SD-1624BG (09)	37	31	13	25	11	
28	CL216-0384-6-09	SD-1628BA (09)	CL216-0402-6-09	SD-1628BG (09)	40	34	13	28	11	
34	CL216-0385-9-09	SD-1634BA (09)	CL216-0403-9-09	SD-1634BG (09)	45	39	13	33	11	
45	CL216-0386-1-09	SD-1645BA (09)	CL216-0404-1-09	SD-1645BG (09)	54	48	13	42	11	
60	CL216-0387-4-09	SD-1660BA (09)	CL216-0405-4-09	SD-1660BG (09)	67	61	13	55	11	

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Dip Spacer

HRS No.	Part No.	Application
CL216-0419-9	D-1600-SPA	Connector unit packing (applicable for models with any number of contacts)
CL216-0420-8	D-1600-SPB	For packing with Connector unit stopper (applicable for models with any number of contacts)

Mounting screws must be supplied by the customer

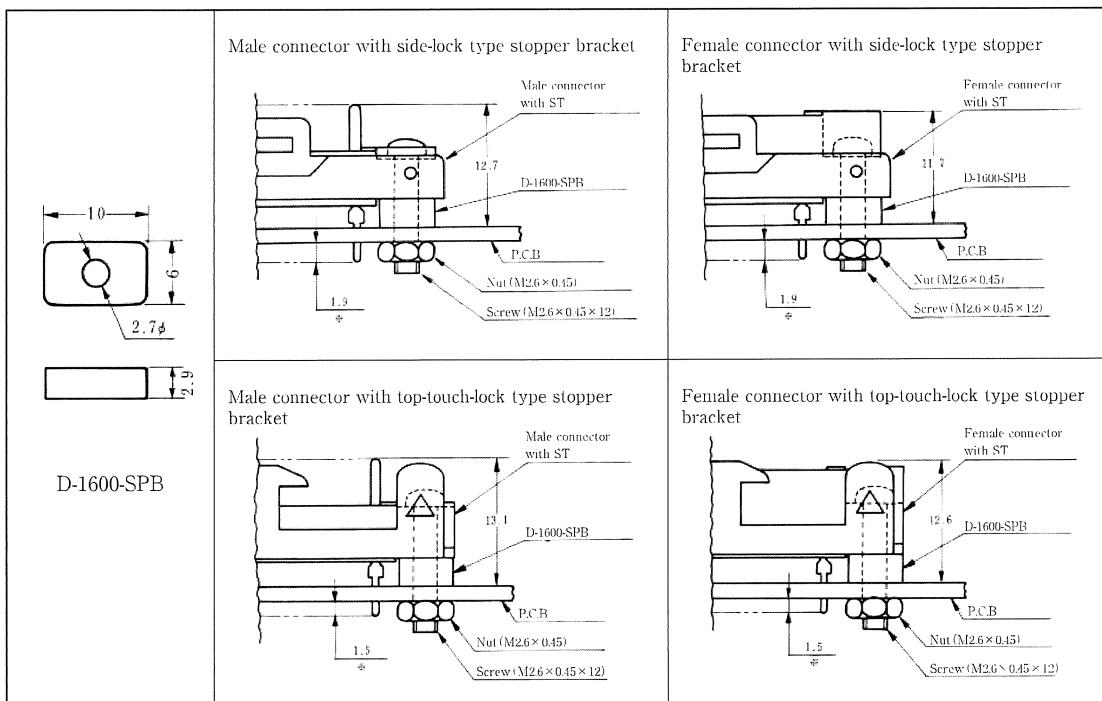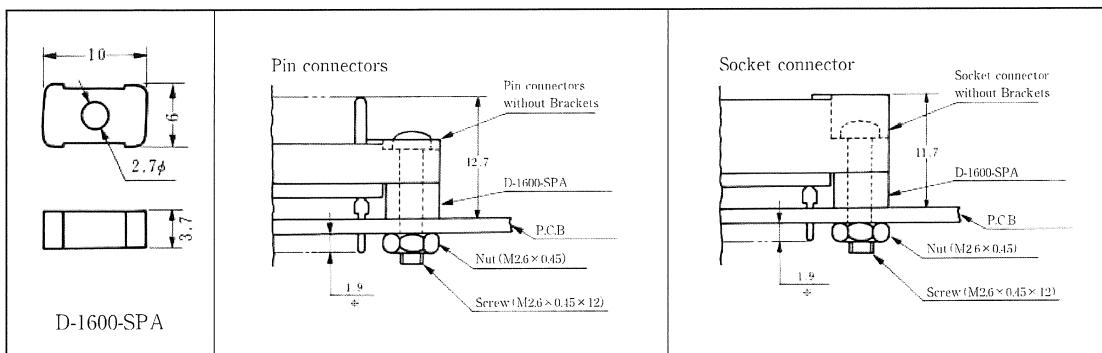

Note 1: The connector unit packaging spacer (SPA) cannot be used for packing with the connector unit stopper bracket.

The packaging spacer with connector unit stopper bracket (SPB) cannot be used for packaging the connector unit.

Note 2: Provide two spacers (SPA and SPB) for each connector unit.

\* The dimensions marked with an asterisk (\*) are for PCBs of 1.6mm in thickness.

## How to use connectors

1. When disconnecting, pull it as straight as possible, because the male pins might be damaged if it is twisted.
2. Connectors are available with gold to be used in adverse environmental conditions and silver-plated pins be used in ordinary conditions.

## Recommended Dip Soldering Pattern of Connector









(mm)

When dip soldering the connectors to a PCB, drill holes as shown below. The figures indicate the number of contacts.


Signs  $\triangle$  indicate the V-shaped mark (direction of the

connector unit) on the mating face of the connector unit.

Recommended Dip Soldering Pattern of Pin Connector (View of the connector-mounting surface of substrate)

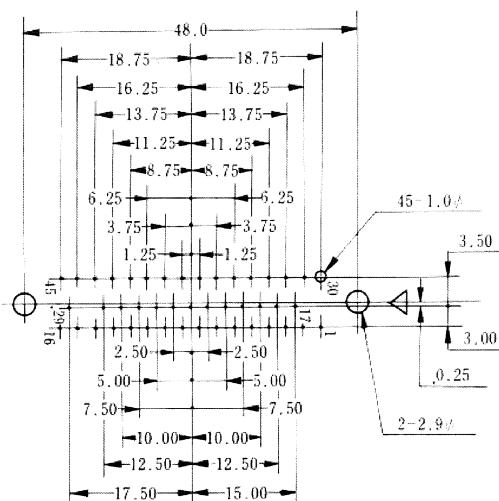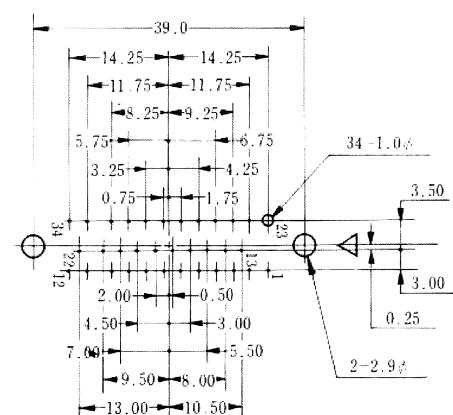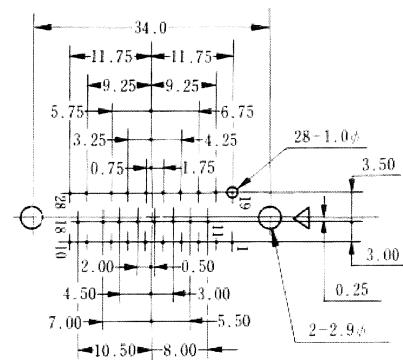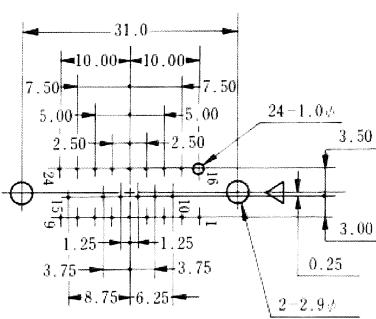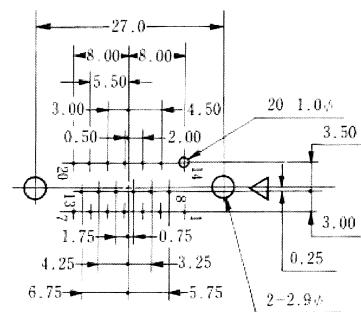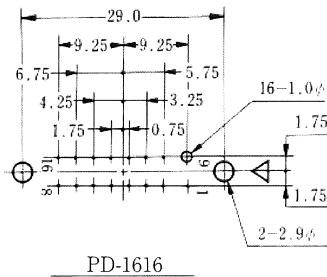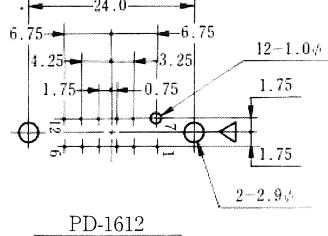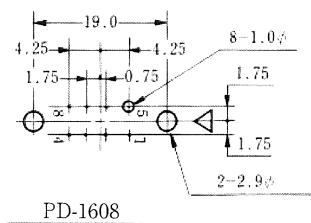


The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
 All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

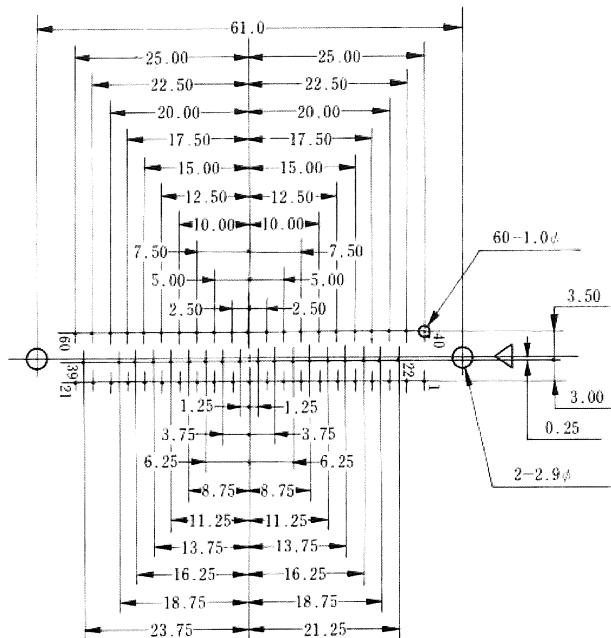


PD-1660


#### Recommended PC Board Hole Pattern Socket Connector

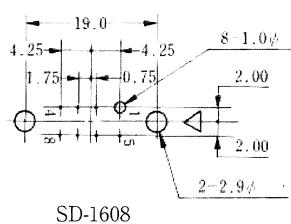


SD-1608

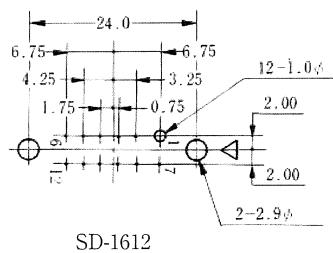


SD-1612

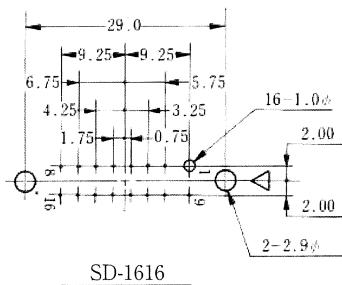


SD-1616

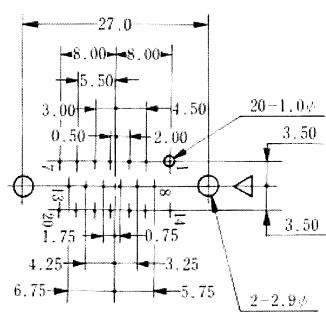

SD-1620

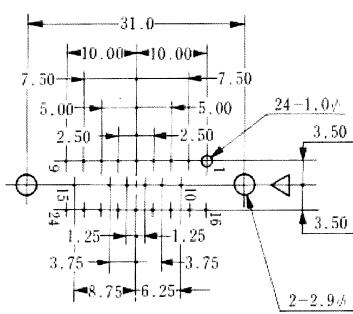


SD-1624

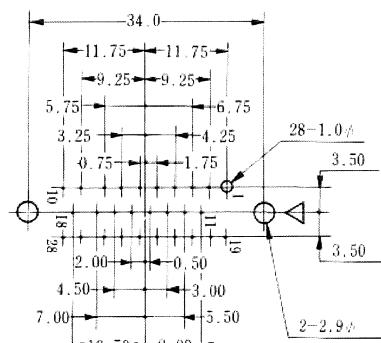


SD-1628


The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
 All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

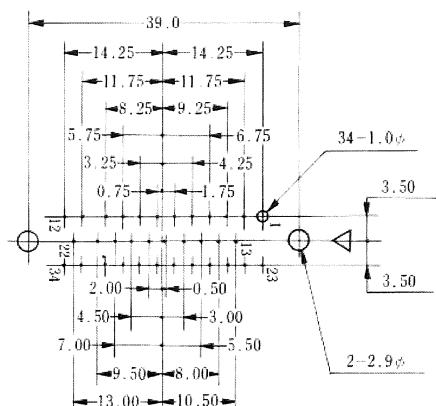

SD-1634

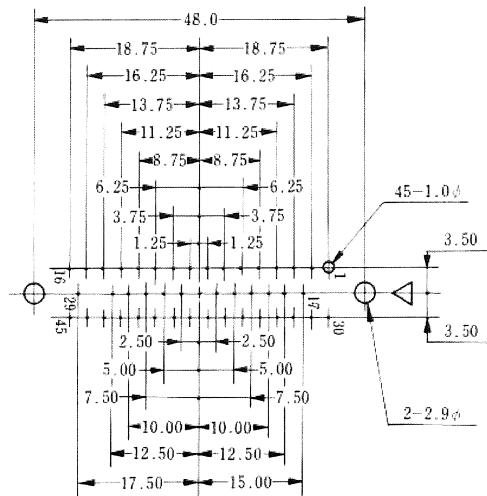


SD-1645

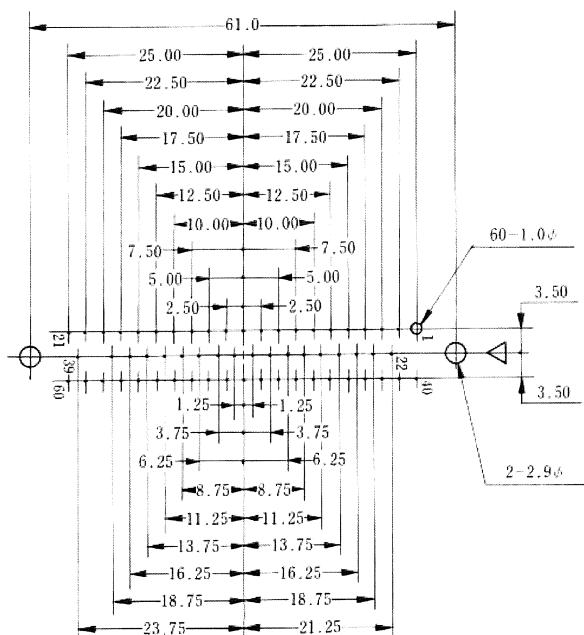

SD-1660


#### Recommended Mounting Hole

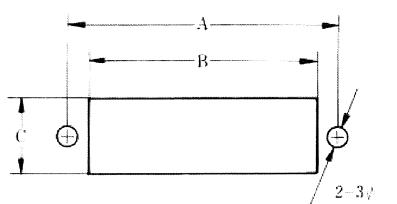

No. of Pin	A	B	C	Applicable Screw
8	19	13.5	8.5	M2.6
12	24	18.5	8.5	
16	29	23.5	8.5	
20	27	21.5	11.5	
24	31	25.5	11.5	
28	34	28.5	11.5	
34	39	33.5	11.5	
45	48	42.5	11.5	
60	61	55.5	11.5	

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Function Chart 1

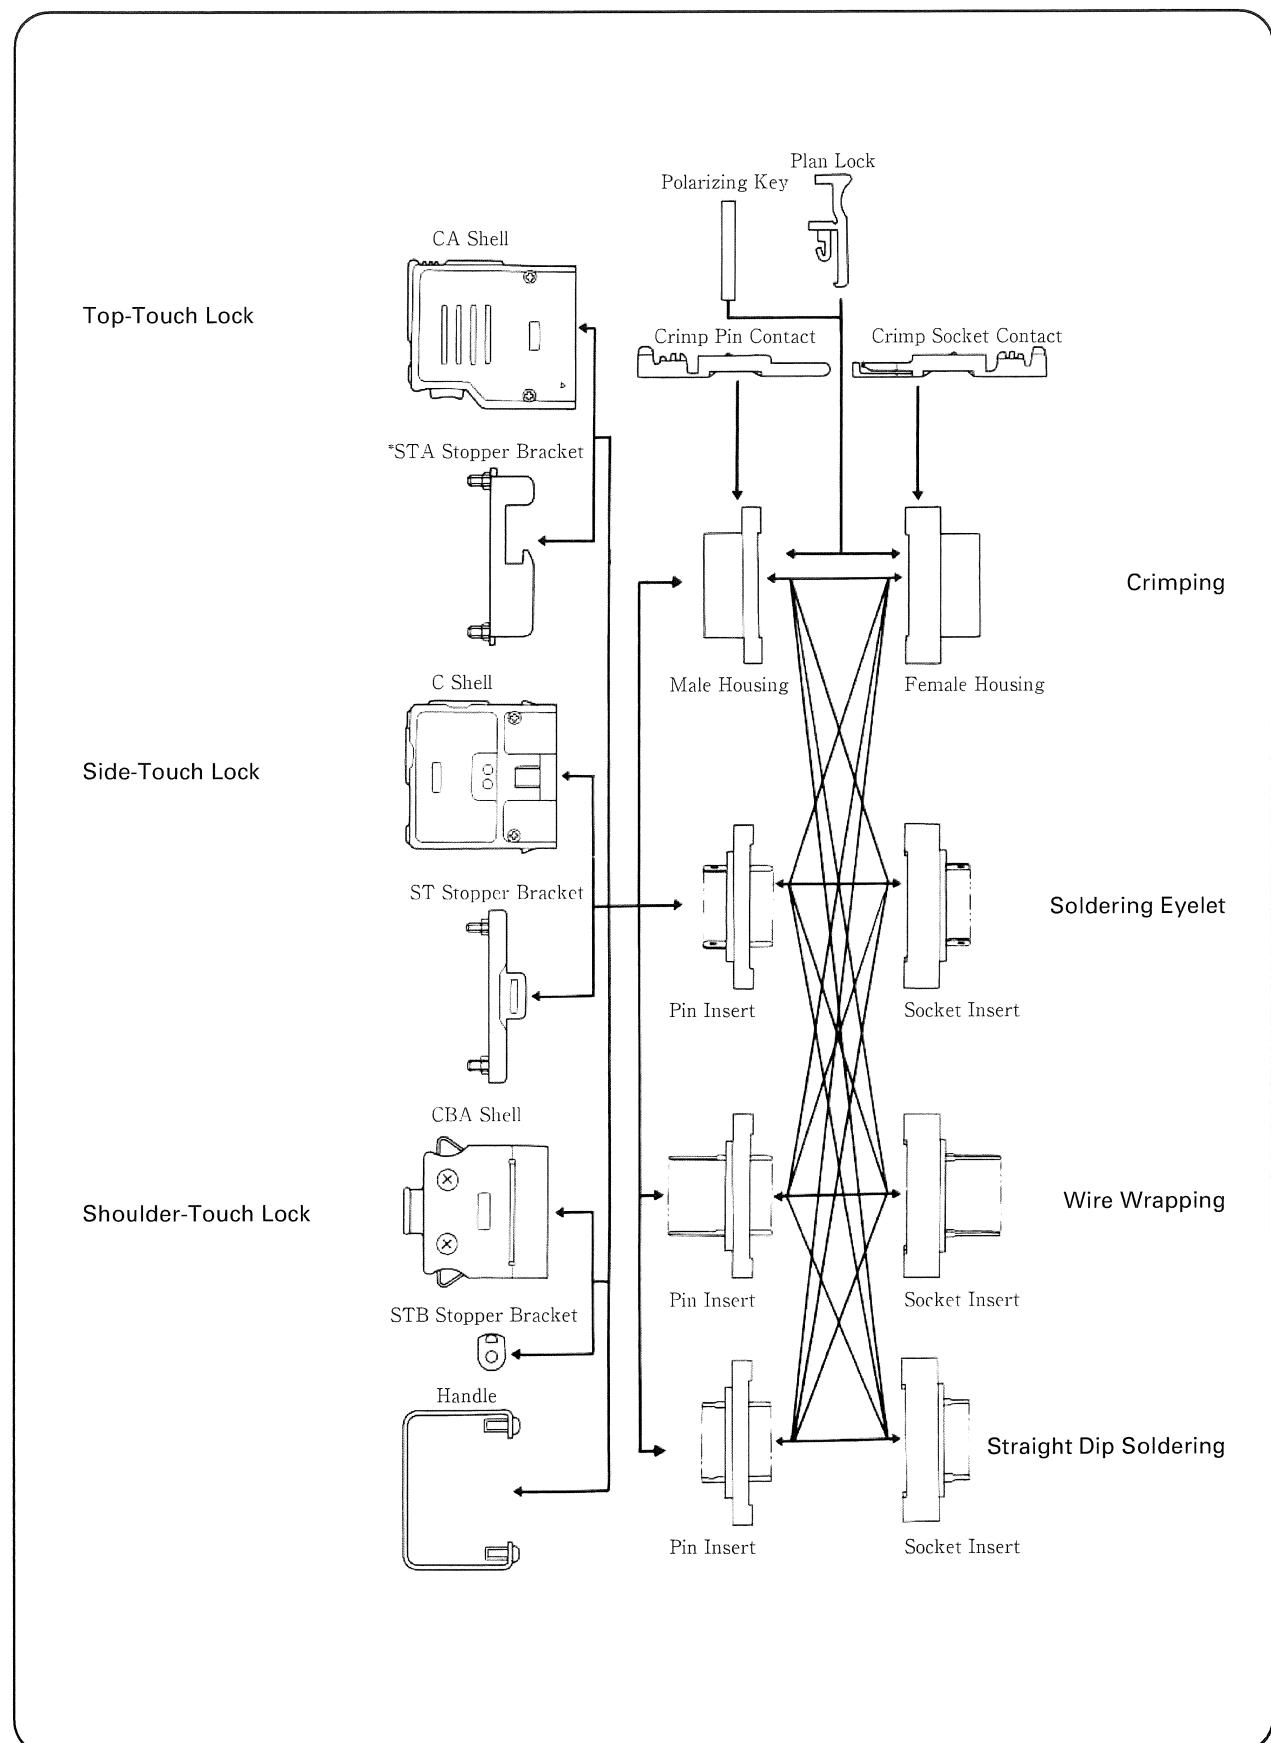

# SUMICON 1600 SERIES RIGHT-ANGLE DIP SOLDERING CONNECTORS (MALE)


## General

The SUMICON 1600 series are Hirose right-angle dip soldering connectors (male).

All models are compatible with the existing soldering

type, wrapping type, crimping type, and straight dip soldering type connectors including their accessories.

20, 28, 34 and 60-contact models are available.

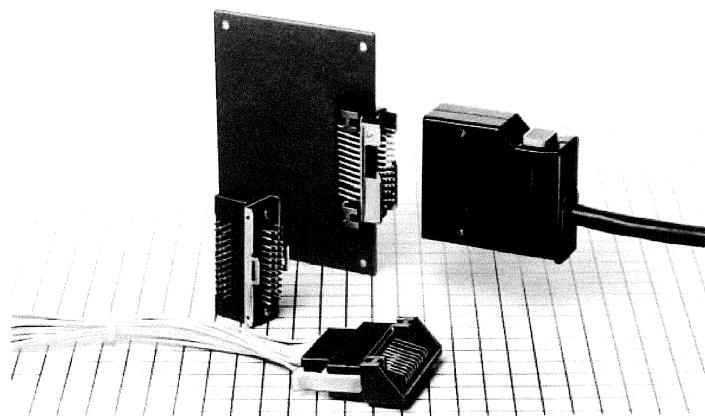

## Features

1. Direct dip soldering on a PCB enables convenient parallel connection with cable plugs.
2. Suitable as an interface, being lightweight and capable of high-density packaging.
3. Further cuts interconnection costs by using crimping type plugs with plastic locks for simple cable connection, so no cases are needed.
4. A wide variety of connection methods available, e.g., dip soldering, wrapping, and crimping, to meet your requirements.
5. Available with or without a top-touch lock type bracket and side-lock type bracket, offering you many choices for your applications.
6. Highly solvent-resistant, using insulating materials with high heat resistance and chemical-resistance.

## Main Applications


Electronic equipment such as computers, peripherals and terminals, control equipment, and measuring instruments.

## Electrical and Environmental

Electrical Characteristics	
Contact Resistance	3A
Contact Resistance	AC 300V
Contact Resistance	10mΩ or less at DC 1A
Contact Resistance	100MΩ or higher at DC 500V
Contact Resistance	1,000Vr.m.s. for 1 minute

Material and Finish		
Insulation	Glass-Filled diallylphthalate resin	Blue
Contact	Brass	Type A: Silver-plated Type B: Gold-plated
Right Angle	Polybutylenephthalate resin	Blue (UL94V-0)
Stopper Bracket	Steel	Nickel plating

## Ordering Information

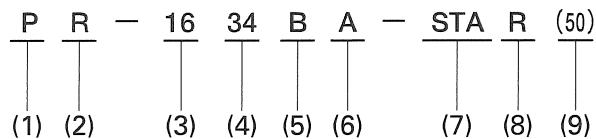

(1) Shape of terminal opening  
 P: Male terminal

(2) Terminal connection method  
 R: Right-angle dip soldering

(3) Series No.  
 16: 1600 series

(4) Number of contacts

(5) Serial sign for connector units  
 Provided with a sequence of upper-case alphabetic characters.



(6) Plating  
 A: Silver-plated  
 B: Gold-plated

(7) Accessories  
 ST: Side-lock type stopper bracket  
 STA: Top-touch type stopper bracket


(8) R: Indicates a connector on which the STA bracket is mounted in the reverse direction against the standard. (the standard refers to the direction in which both  $\triangle$  marks on the STA bracket and connector unit are in the direction).

(9) Specification  
 (50) : RoHS compliant

### Right Angle Dip Soldering Pin Connectors With Stopped Bracker for Top-Touch Lock Plug Shell

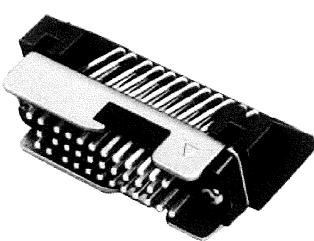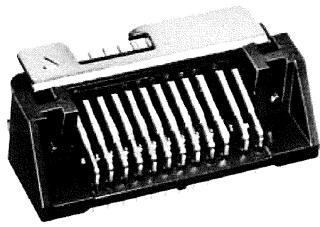

PR-1634BA-STA (50)

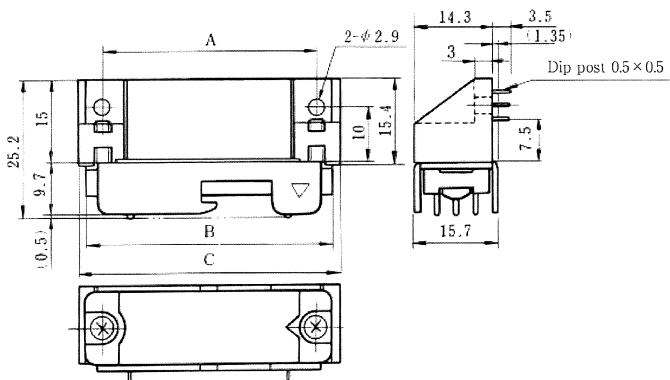

Unit: mm


No. of Pin	HRS No.	A Type	Unit: mm			RoHS
			A	B	C	
20	CL216-0448-7-50	PR-1620BA-STA (50)	27	33	36	YES
28	CL216-0450-9-50	PR-1628BA-STA (50)	34	40	43	
34	CL216-0451-1-50	PR-1634BA-STA (50)	39	45	48	
60	CL216-0453-7-50	PR-1660BA-STA (50)	61	67	70	

Gold plated type are available options.

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## With Stopper Bracket for Side-Touch Lock Plug Shell

Unit: mm

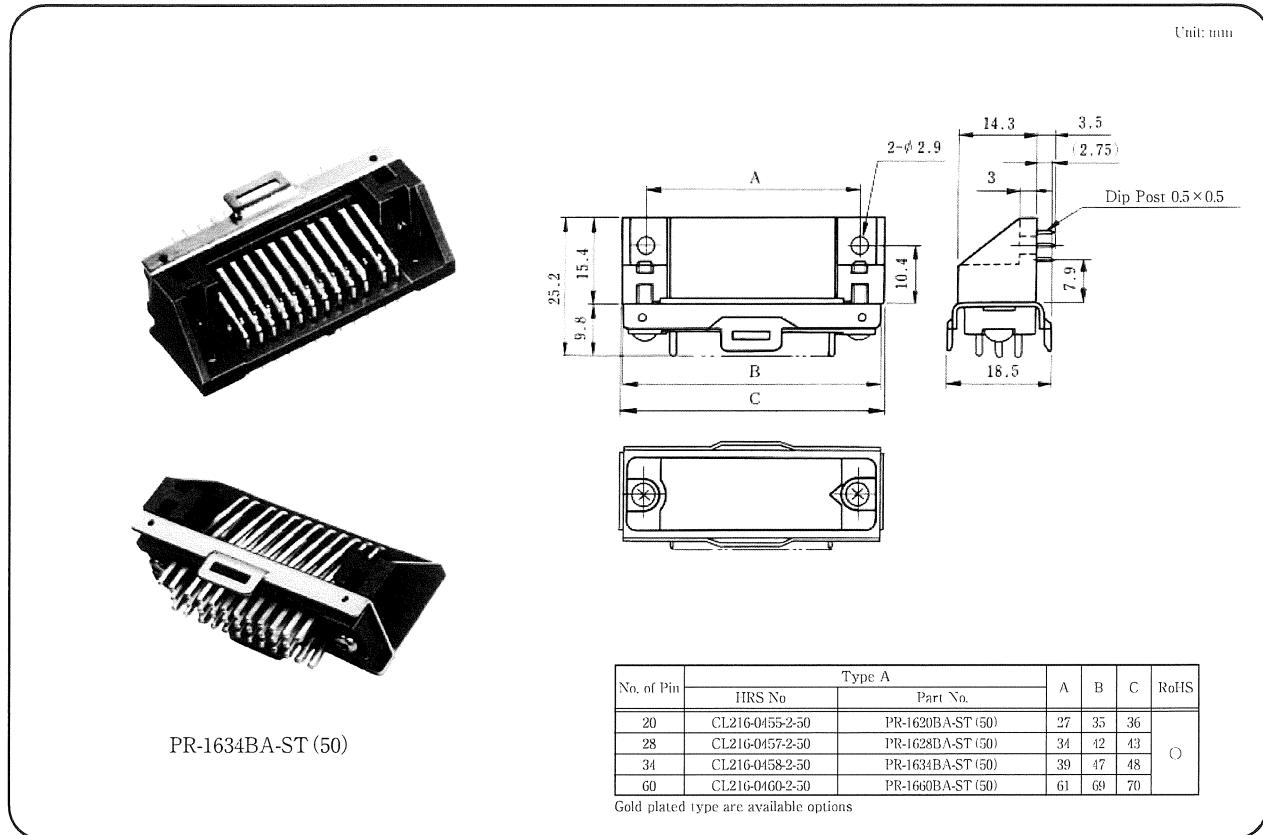


PR-1634BA-ST (50)

No. of Pin	Type A		A	B	C	RoHS
	HRS No	Part No.				
20	CL216-0455-2-50	PR-1620BA-ST (50)	27	35	36	○
28	CL216-0457-2-50	PR-1628BA-ST (50)	34	42	43	○
34	CL216-0458-2-50	PR-1634BA-ST (50)	39	47	48	○
60	CL216-0460-2-50	PR-1660BA-ST (50)	61	69	70	○

Gold plated type are available options

## Connector Unit Only Without Bracket

Unit: mm

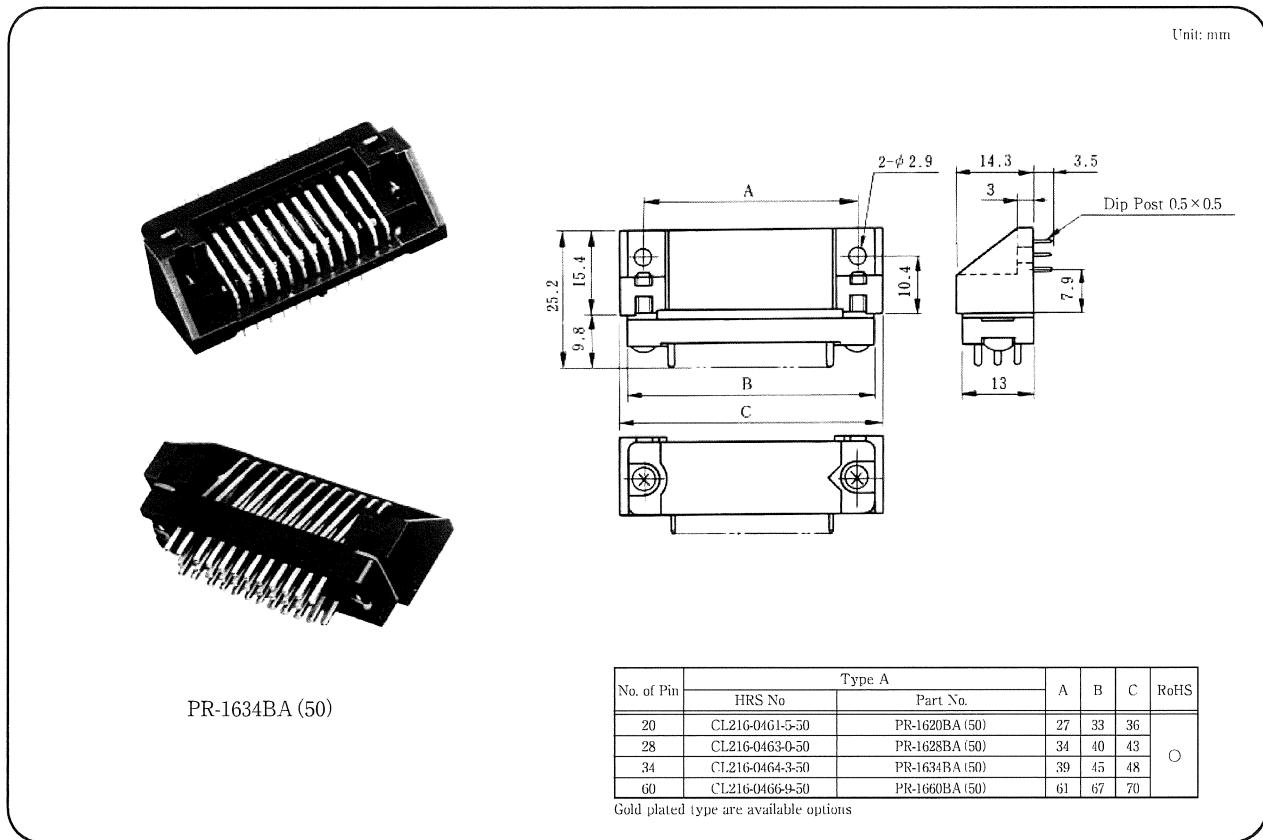


PR-1634BA (50)

No. of Pin	Type A		A	B	C	RoHS
	HRS No	Part No.				
20	CL216-0461-5-50	PR-1620BA (50)	27	33	36	○
28	CL216-0463-0-50	PR-1628BA (50)	34	40	43	○
34	CL216-0464-3-50	PR-1634BA (50)	39	45	48	○
60	CL216-0466-9-50	PR-1660BA (50)	61	67	70	○


Gold plated type are available options

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information. All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## With Stopper Bracket for Top Touch Lock Plug Shell in Reverse Position

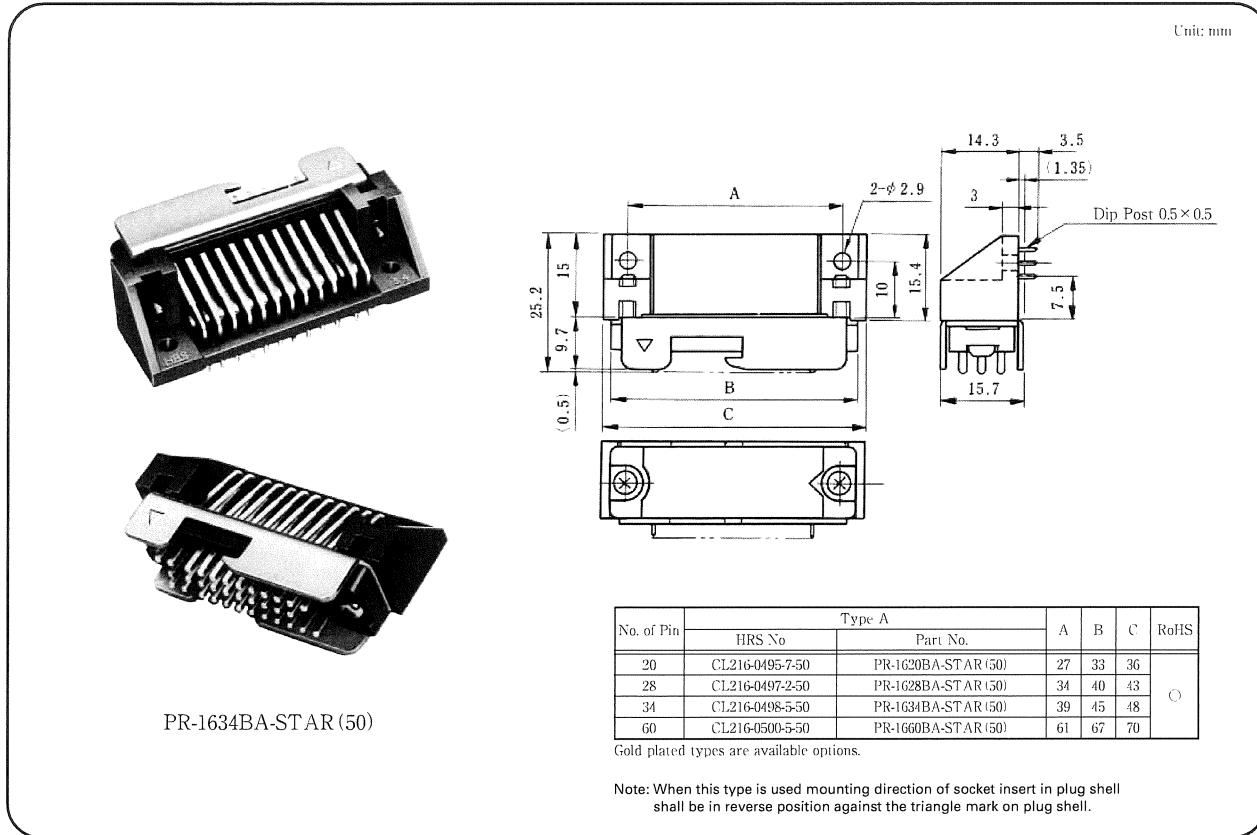

## How to Use (Example)

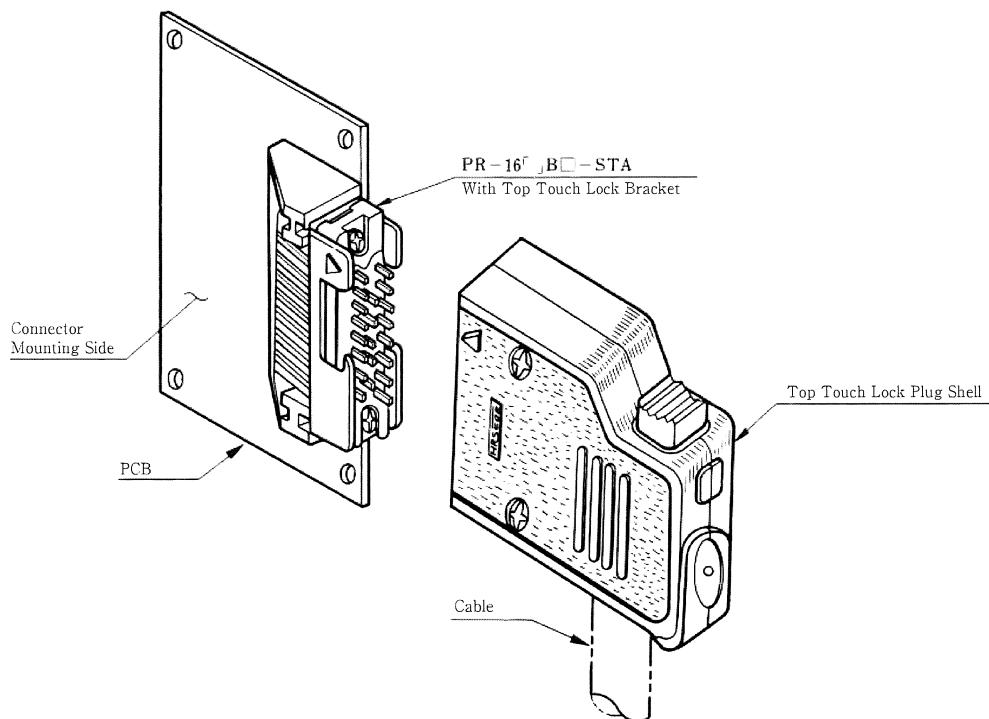

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information. All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## How to Use Right Angle Dip Soldering Connectors

Unit: mm

1. The standard use of this to mount it on the left side of a vertical PC board. (Fig. 1)

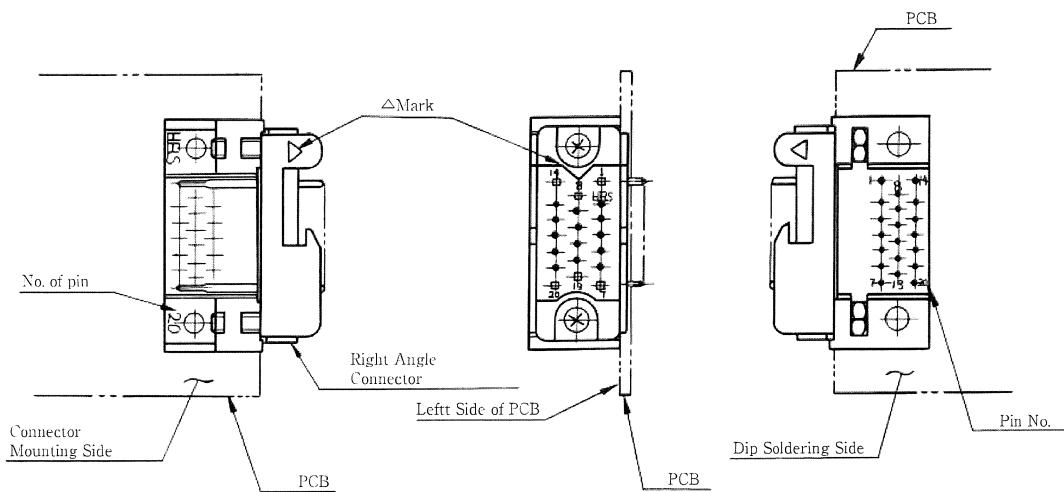


Fig. 1

Unit: mm

2. It is possible to mount it on the right side of PCB but special caution is necessary to be opposite all pin locations on dip soldering surface. (Fig. 2)

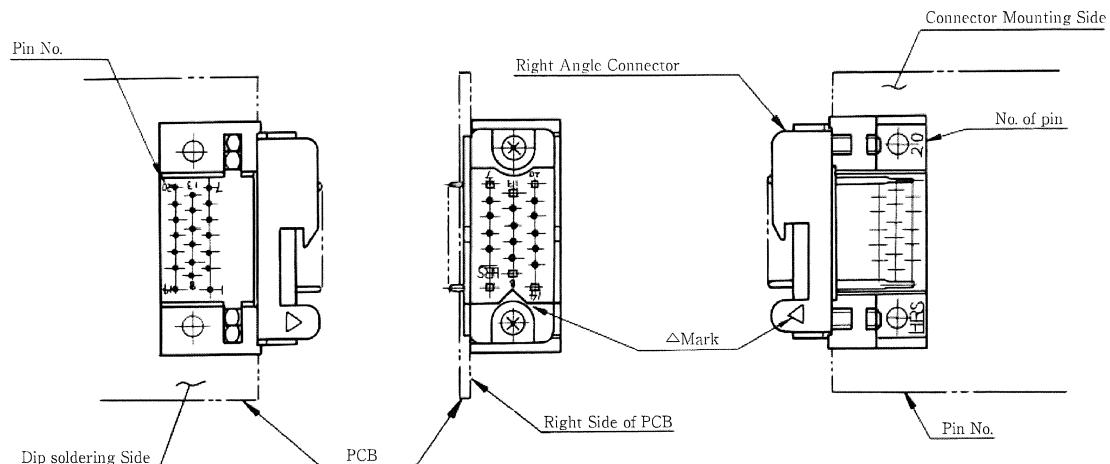


Fig. 2

3. When Top Touch Lock Type Plug Shell and Stopper Bracket are used with mounts on the right side of a PCB, not only the pin locations become opposite, but also the Lock Release Button and Cable Exit are

upside down.  
 So, the Reverse Mount Stopper Bracket is convenient in such case. (Fig. 3)


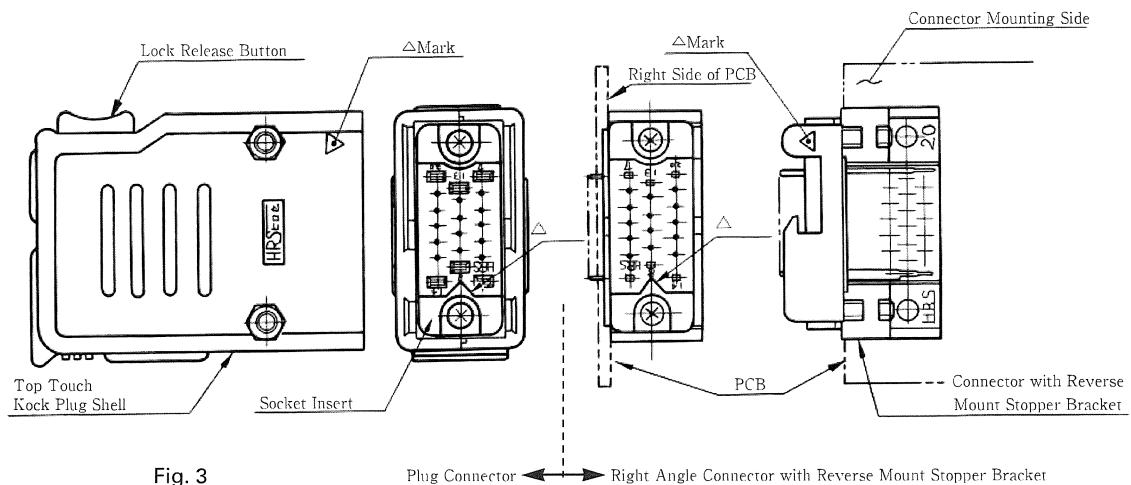


Fig. 3

4. M2.6 screws are recommended to mount Right Angle Dip Soldering Pin Connectors.
5. Please choose PC board thinner than 2.4mm.
6. In extracting plug connector, please pull it up straight out to prevent male pin from bending.
7. The standard plating is silver but gold is also an available option.
8. Note: The dip soldering pattern on PCB of Right Angle Type and Straight Type are different from each other.
9. Before using a solvent other than trichloroethylene, chlorosene, methanol, isopropanol, or ethyalchol to wash soldered connectors, contact out engineering department.

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.


## Recommended Dip Soldering Pattern

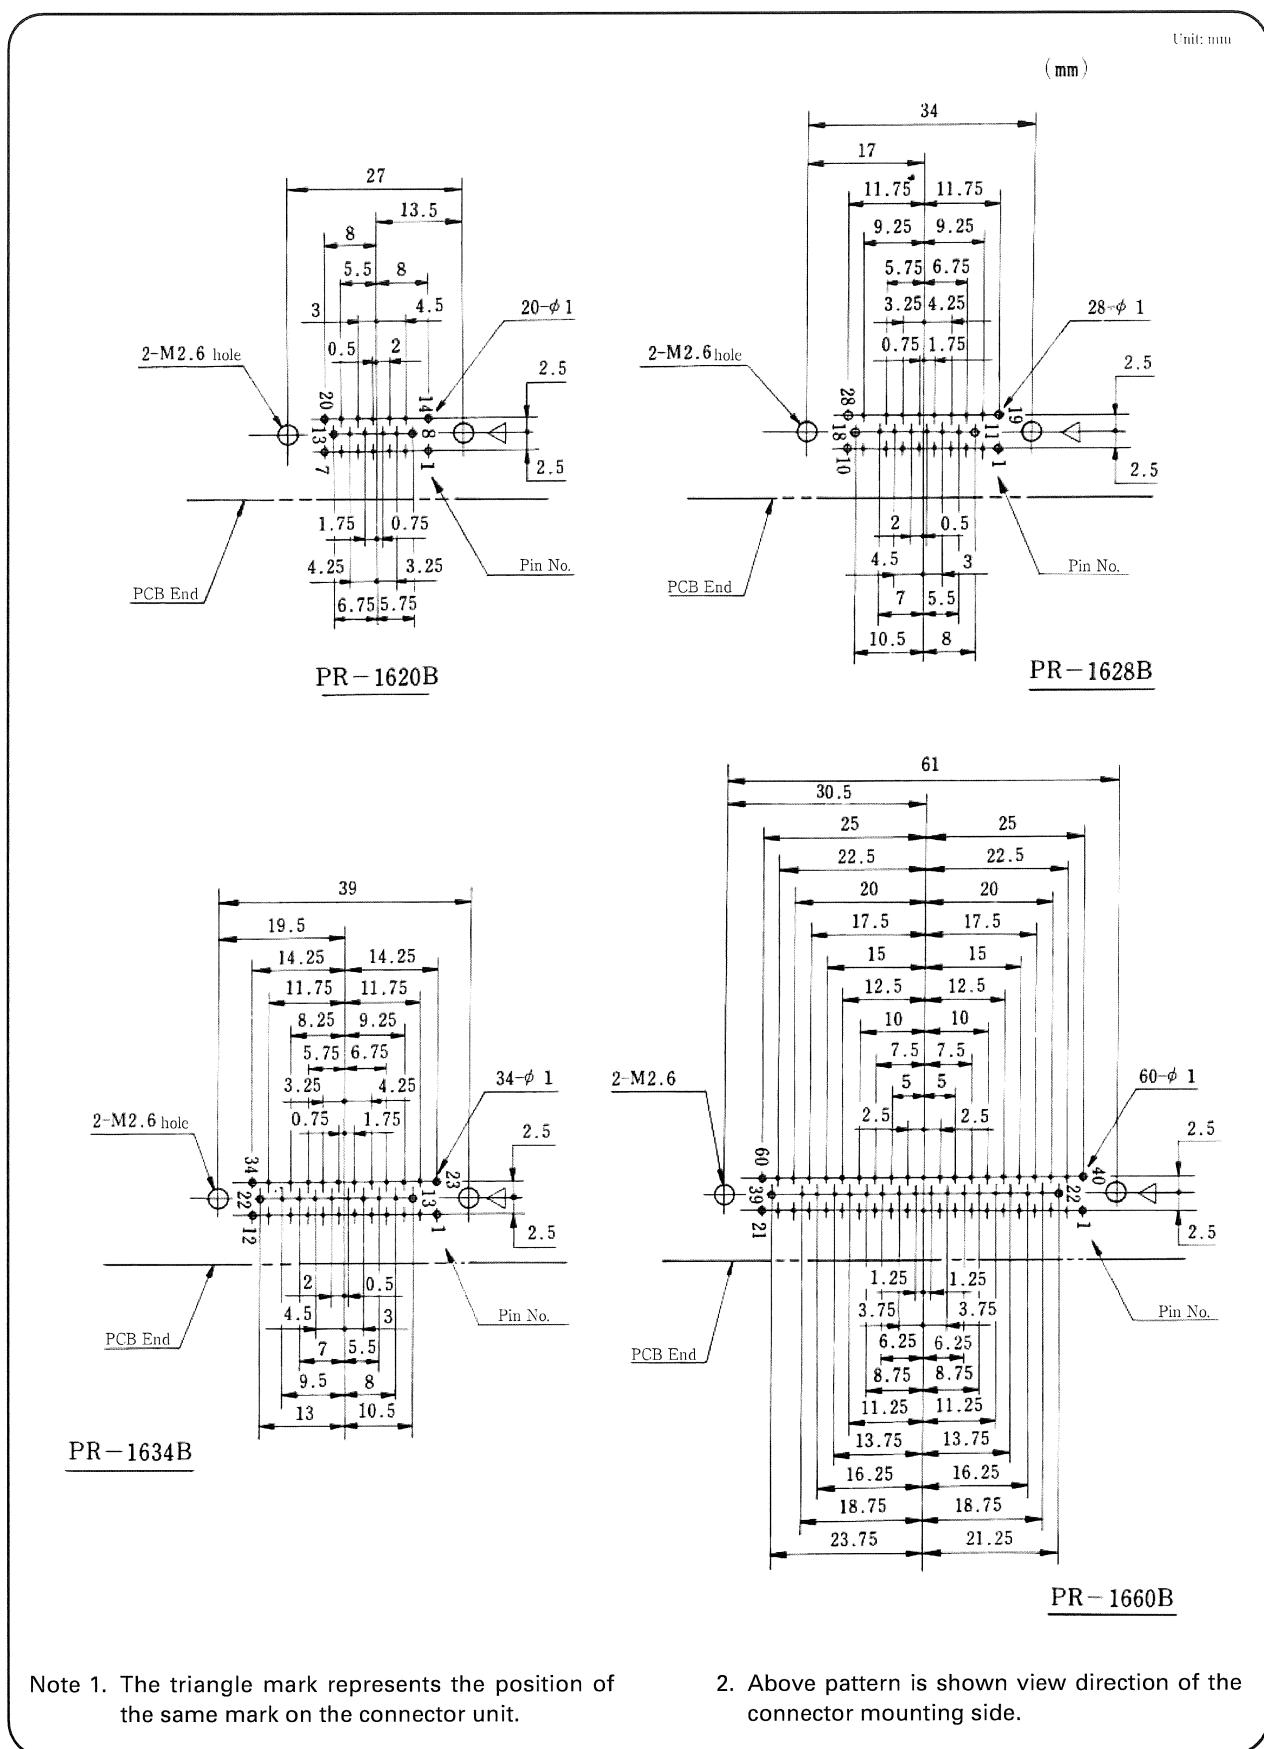


## Recommended Mounting Pattern

Unit: mm


For insertion-soldering in the PCB, drill mounting holes as shown in the figure below.

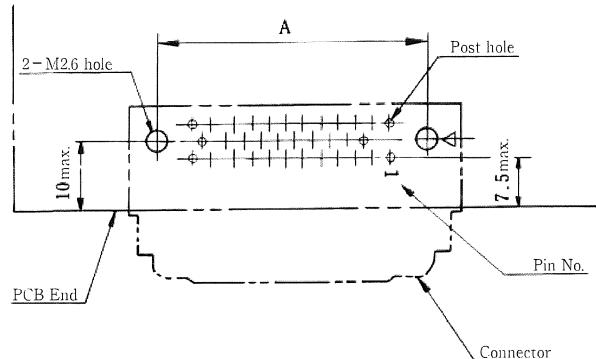

With top-touch-lock type stopper bracket

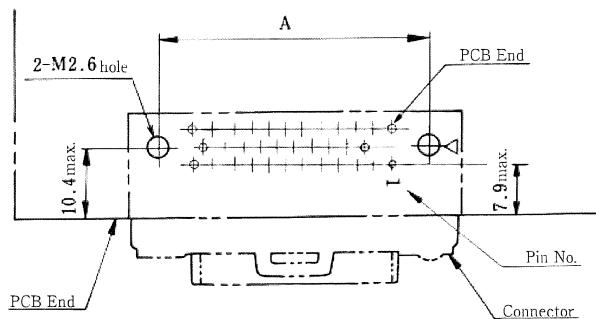

With side-lock type stopper bracket

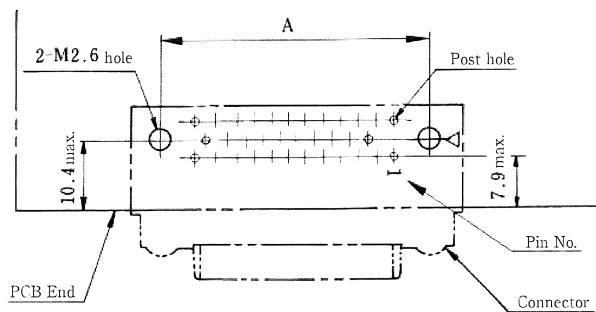

No. of pin	A
20	27
28	34
34	39
60	61


Connector Unit Type

The triangle mark represents the position of the same mark on the connector unit.

Above pattern is shown from view direction of the connector mounting side.

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.  
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at [www.hirose-connectors.com](http://www.hirose-connectors.com), or contact your Hirose sales representative.

## Function Chart 2

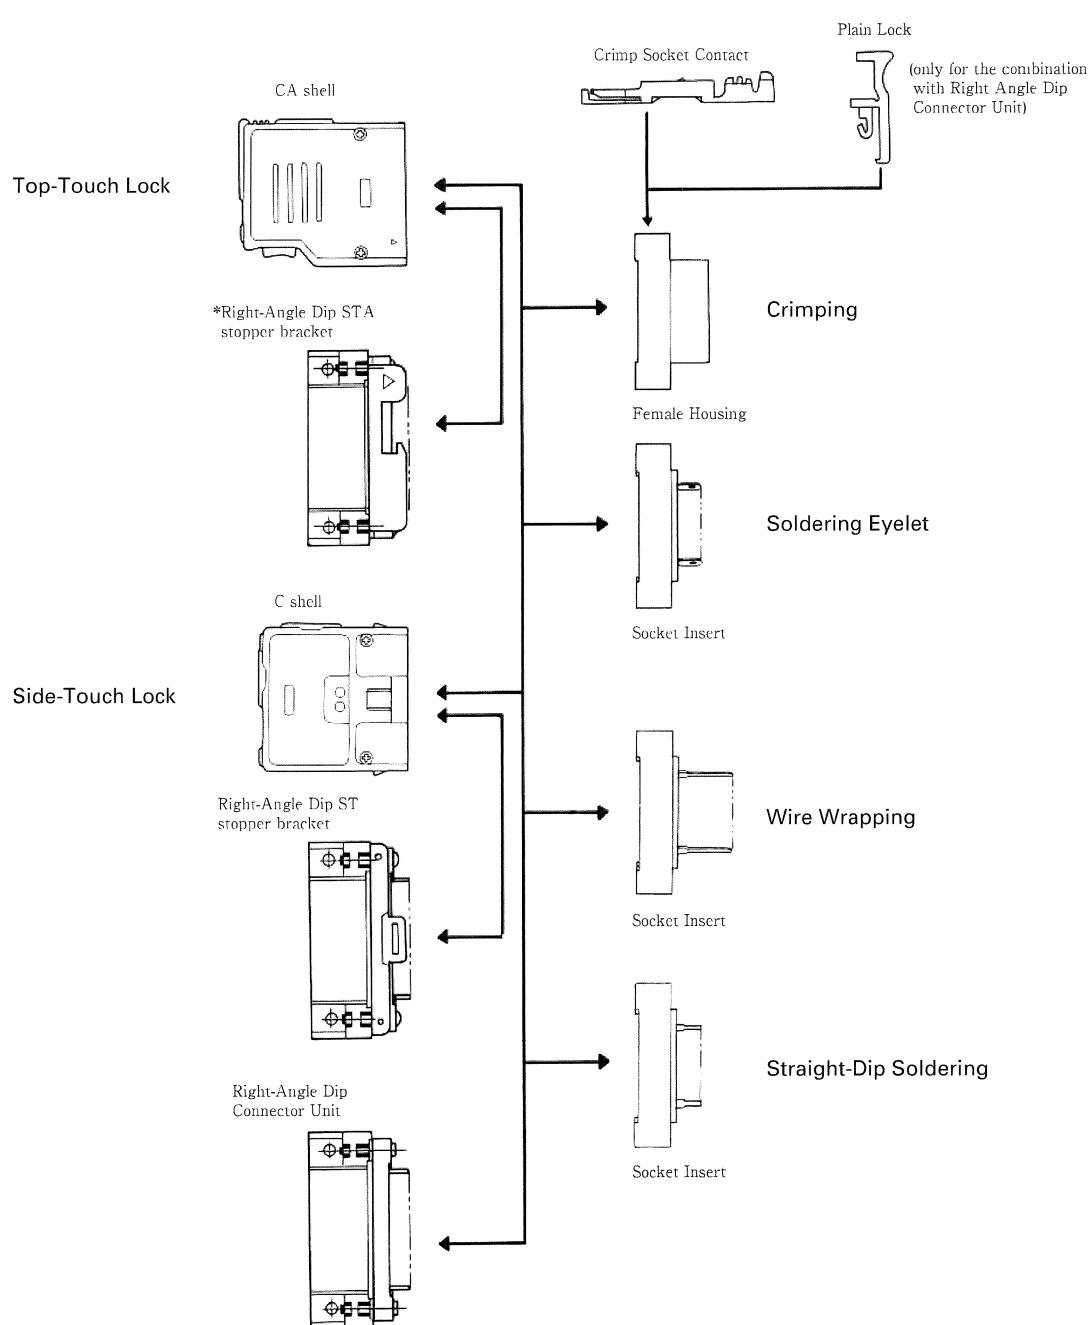

\*Dust cap is available for STA stopper bracket.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)